

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[4295](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 4295  
 Adapter, SMA Female TNC Female**

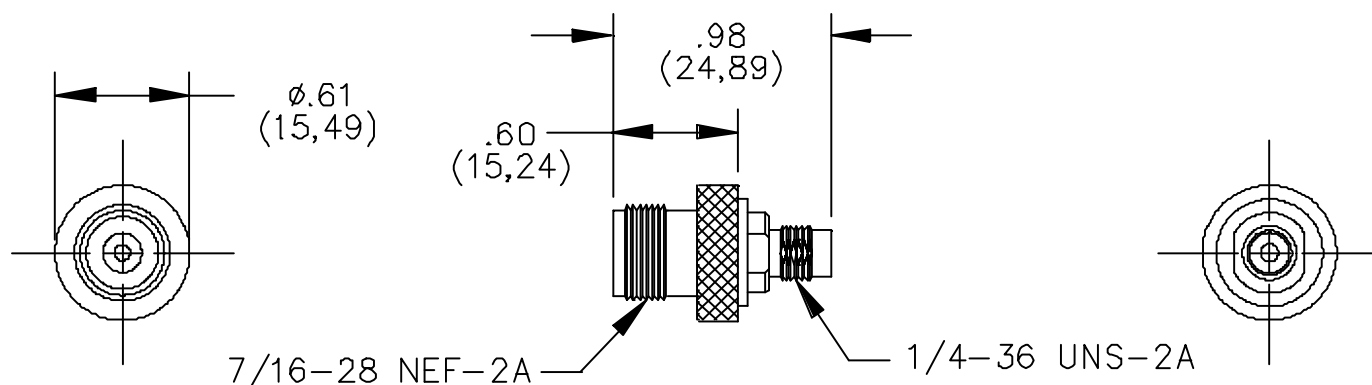

**MATERIALS:**

Body: Gold Plated Beryllium Copper, Center Contacts: Gold Plated Beryllium Copper

Finish: Body and Contact – Gold plated per MIL-G-45204, Type II, class 2.

Marking: “Pomona 4295”

**RATINGS:**

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 335VRMS Max.

Nominal Impedance: 50 Ohms

Frequency Range: 0-12.4 GHz.

Operating Temperature: -65°C (-85°F) to +165°C (+329°F)

**OPERATING INFORMATION: Model 4295**

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA