

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[4296](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona[®]

**Model 4296
Adapter, SMA Male To Type "N" Male**

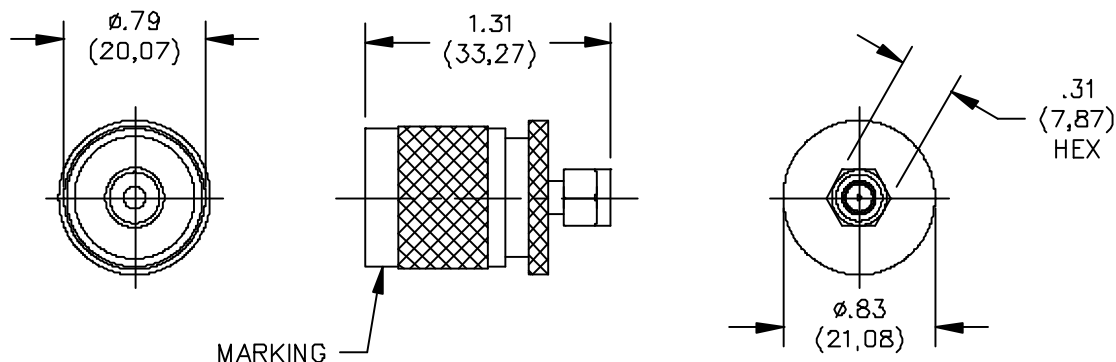

MATERIALS:

Body – Gold Plated Beryllium Copper, Center Contact - Gold Plated Brass

Dielectric: Teflon

Finish: Body and Contacts – Gold plated

Marking: “Pomona 4296”

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 335VRMS Max.

Operating Temperature: -65°C (-85°F) to +165°C (+329°F)

Nominal Impedance: 50 Ohms

Frequency Range: 0-12.4 GHz.

ORDERING INFORMATION: Model 4296

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA