

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[4487-48](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Pomona®

## Model 4487 & 5260 BNC (Male) On Retractable Cable With Molded Strain Relief

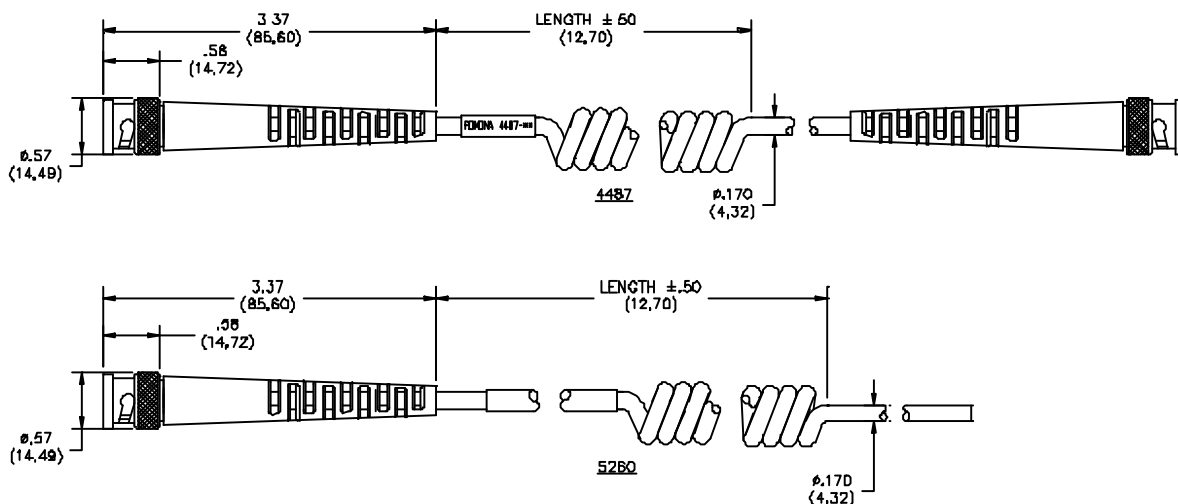

### FEATURES:

- BNC center contact is gold plated for optimum electrical connection.
- Flexible Strain Relief is molded to the BNC/Coaxial Cable to ensure long cable life.
- BNC shell is plated for tarnish resistance.

### MATERIALS:

BNC (Male): Body: Brass, Nickel Plated

Center Contact: Brass, Gold Plated

Impedance: 50 Ohms

Strain Relief: PVC Molded to Cable, Color: Black

Marking: "POMONA 4487-XX" or "POMONA 5260-XX"

Cable: Shielded microphone, center conductor, 24 AWG (45x40), polyurethane jacket, .170" (4,32 mm).

Pomona part number marked on the cable.

### RATINGS:

Operating Temperature: 50°C (+122°F) Max.

Operating Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 270VRMS Max.

**ORDERING INFORMATION:** Model 4487-XX (BNC Male, Both Ends) or 5260-XX (BNC Male, One End Only) XX = Extended Length In Inches , Standard. Lengths: 48" (122 cm), 60" (152,4 cm), 72" (183 cm)

Ordering Example: 4487-48 is BNC (Male), Both Ends, Extended Cable Length of 48" (122 cm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA