

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[4613-12-0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Pomona®

**Model 4613 & 5525  
 Micrograbber® Test Clip,  
 Each End**

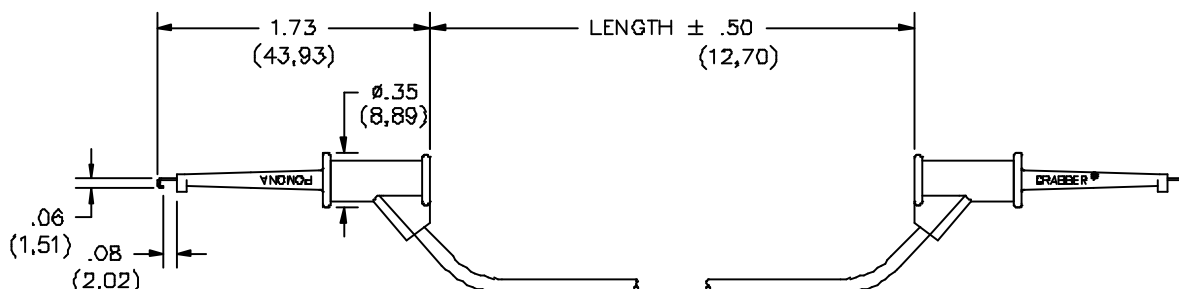

## FEATURES:

- Ideal for providing jumper wires between small components.

## MATERIALS:

Conn: 1<sup>st</sup> End - Micrograbber®

Material: Contact – Beryllium Copper per QQ-C-533, Alloy 165, ¼ HM.

Spring – Stainless Steel, Alloy 302.

Finish: Contact – Gold plated per MIL-G-45204, Type 1, Class 00.

Insulation: Glass filled nylon.

Marking: “POMONA ELECTRONICS” “MICROGRABBER®”

Wire: 20 AWG, stranding 41 x 36 t.c., PVC insulated 2.21 (.087) O.D.

Marking: “POMONA 4613-”

Color: See Ordering Information.

Conn: Same as first end.

## RATINGS:

Operating Temperature: +102°C. (+216°F.) Max.

Operating Voltage: 30VAC/60VDC Max.

Current: 3 Amperes

## ORDERING INFORMATION: Model 4613-XX-\*

Single Patch Cord: XX = Cable Lengths, Standard Lengths: 12” (305), 24” (610), 36” (914) & 48” (1219).

Additional lengths can be quoted upon request.

Ordering Example: 4613-48-2 Indicates 48” in length, color is Red

## ORDERING INFORMATION: Model 5525

Kit containing 10 pieces of Model 4613-24, one of each color.

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ ” (.51 mm), .xxx =  $\pm .005$ ” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA