

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[4770-0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 4770**  
**Spring-Loaded Binding Post**

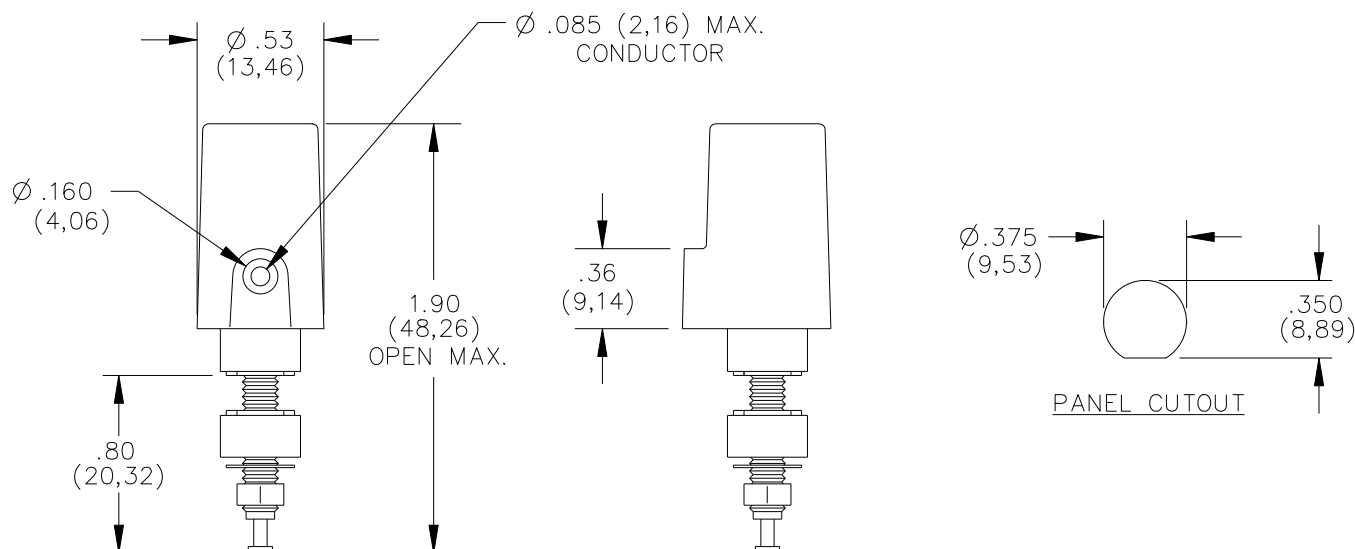

**FEATURES:**

- Mounts in panels from 1.60 (.063) to 9.53 (.375) thick.
- Accepts wires or plugs up to 2.16 (.085) DIA. with insulation up to 4.06 (.160) DIA.

**MATERIALS:**

Body: Bright Tin Plated Brass

Insulation: Polycarbonate

Lockwasher: Steel

Hex Nut: Brass

**RATINGS:**

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 630 VAC Max.

Operating Temperature: +115°C (+239°F) Max.

Current: 15 Amperes

**ORDERING INFORMATION: Model 4770-\***

\*=Color, -0 Black, -2 Red,

Ordering Example: 4770-2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

W:\pomona\grponly\Datasheet Updates\Updates 2005\d4770\_1\_02.doc

More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1