

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[4814-BB-24](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 4814**  
**Cable Assembly, Microwave,**  
**SMA (Male) Right Angle To SMA (Male)**

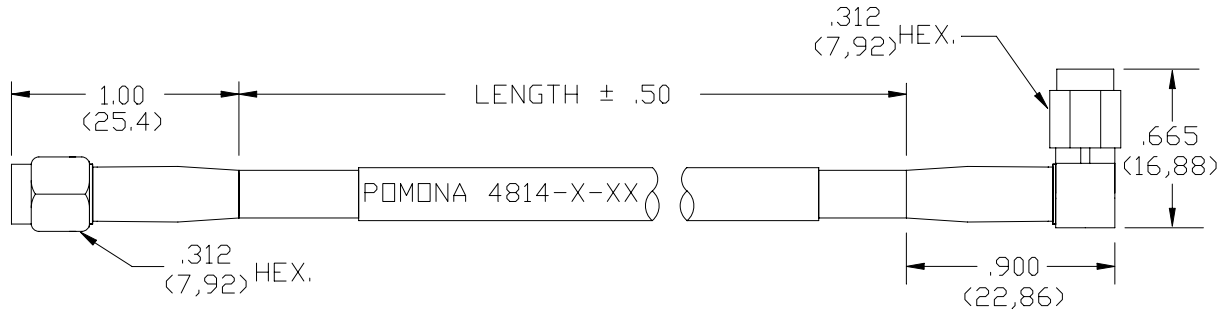

	RG 316/U Tinted Brown
	4814-BB-XX
Cap. pF/ft.	29.0
Nom. Imp. Ohms	50
Loss	.56 dB/ft @ 3 GHz Max.
Temperature	+200°C. (+392°F.) Max.

**MATERIALS:**

Connectors: Right Angle SMA (Male) & SMA (Male)  
 Body – Passivated Stainless Steel, Contact: Gold Plated Brass  
 Dielectric – Teflon  
 Finish: Contact – Hard gold plated  
 Body – Nickel plated  
 Cable: See Tab Block Marking: “Pomona 4814-X-XX”

**RATINGS:**

Operating Voltage: 335 VRMS Max.

**ORDERING INFORMATION:** Model 4814-BB-XX

X=Cable Type (see table)

XX = Cable Lengths, Standard Lengths: 24” (610), 48” (1219) & 60” (1524).

Additional lengths can be quoted upon request.

Ordering Example: 4814-BB-24 Indicates 24” in length.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies.

Made in USA