

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[4958](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

Model 4958
Twinaxial, BNC, Receptacle,
Bulkhead

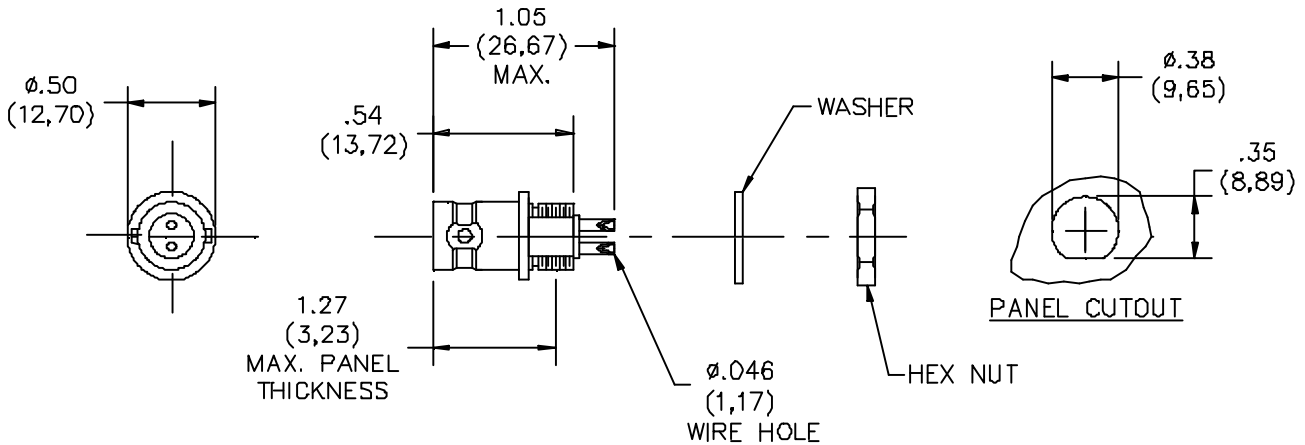

MATERIALS:

Body: Brass, Tarnish Resistant Plating
 Alloy 360, 1/2 Hard or Phosphor Bronze
 Male Contact: Gold Plated Brass
 Female Contact: Gold Plated Beryllium Copper
 Dielectric: PTFE
 Finish:
 Body and Fittings: Tarnish resistant
 Male and Female Contact – Gold plated
 Marking: “POMONA 4958”

RATINGS:

Operating Temperature: -65°C (-85°F) to $+165^{\circ}\text{C}$ ($+329^{\circ}\text{F}$)
 Operating Voltage: 500 VRMS Max.
 Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 4958

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (.51 mm), $.xxx = \pm .005$ " (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.

Made in USA