

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[5019-60](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona[®]

**Model 5019 & 5019N
 Cable Assembly - Minigrabber[®] Test
 Clips To Bantam Plug**

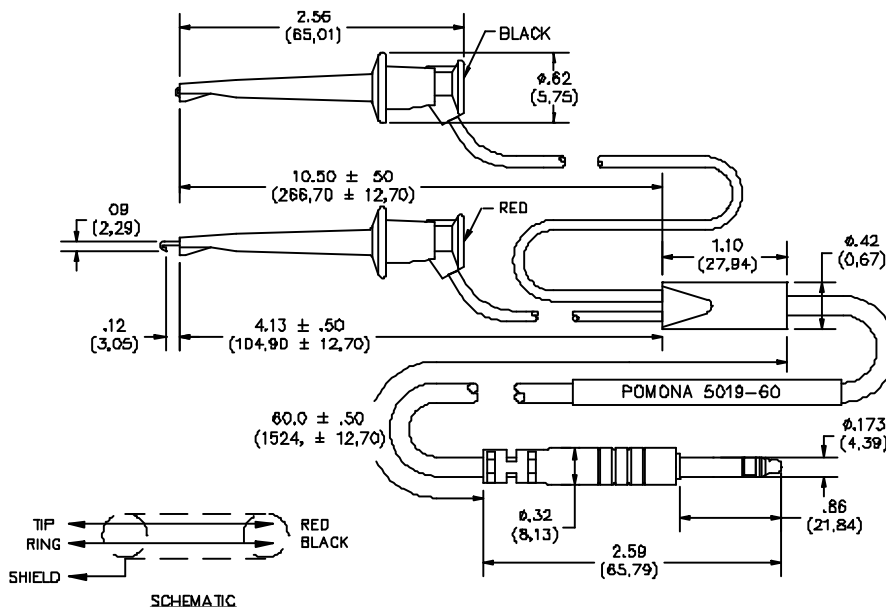

FEATURES:

- Shielded cable to reduce noise
- Provides quick access from Bantam Jack to terminals
- Bantam Plug is molded to the cable to provide optimum durability

MATERIALS:

Conn.:

- 1st End - Minigrabber[®]
- Contact – Beryllium Copper
- Spring – Stainless Steel
- Finish: Contact – Gold Plated
- Insulation: Handle – Glass filled nylon.
- Color matches wire.
- Barrel – Glass filled nylon. Color matches wire.
- Marking: “Pomona Electronics”
- “Minigrabber[®]”

Breakout Leads: 20 AWG, 41 x 36 T.C., PVC insulated, 2.21 (.087) O.D. Color: Red and Black, Red lead connected to tip, Black lead connected to ring.

Molded Breakout: PVC, Color – Gray

Cable: 2 conductor shielded stranded copper, 7 x 30, PVC insulated, 4.57 (.180) O.D. Color – Gray

Conn.:

- 2nd End – Bantam Plug (Miniature Phone Plug)
- Finish: 5019 brass, 5019N nickel plated .
- Insulation: PVC. Color - Black

RATINGS:

Operating Temperature: +50°C (+122°F) Max.
 Operating Voltage: 300 VRMS/DC

ORDERING INFORMATION: Model 5019-60 and 5019N-60

Standard Length – 60” (1520mm)
 Ordering Example: 5019N-60, cable is 60” long with brass nickel plated Bantam connector.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
 Technical Assistance: 800-241-2060

PomonaACCESS 90295 (800) 444-6785 or (425) 446-6010
 More drawings available at www.pomonaelectronics.com