

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[5058-X-36](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 5058**  
**SMA Male To Type "N" Male**  
**50 Ohm Cable Assembly**

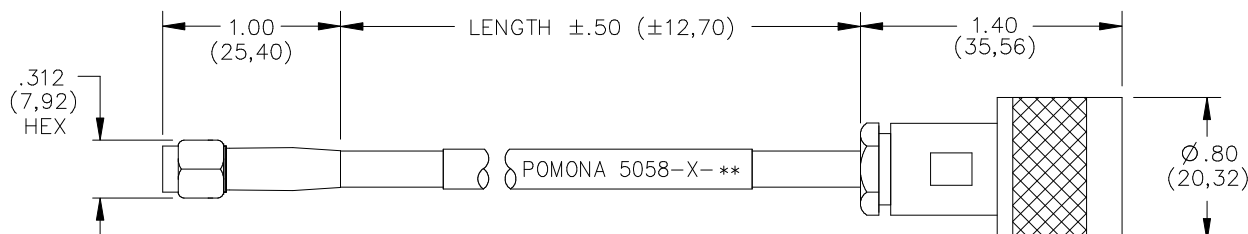

**FEATURES:**

- Provides a simple means of connection between equipment with both SMA and Type N jacks.
- SMA and N connectors feature PTFE dielectric and tarnish resistant shells for superb electrical performance.
- Gold center contacts assure noise free connections.

**MATERIALS:**

Type N Male: Body and Fittings – Brass, Tarnish Resistant  
 Center Contact – Brass, Gold Plated  
 Dielectric - PTFE  
 Coaxial Cable: RG142B/U, Double Shielded, O.D. .195” (4,95mm)  
 SMA Male: Body and Fitting – Steel, Finish – Passivated Steel  
 Center Contact – Brass, Gold Plated  
 Dielectric – PTFE

**RATINGS:**

Operating Temperature: +200°C (+329°F) Max.  
 Operating Voltage: 335 VRMS Max.  
 Connector/Cable Impedance: 50 Ohms

**ORDERING INFORMATION:** Model 5058-X-xx

xx = Cable Length in Inches, Standard Lengths: 36” (91.44cm), 48” (122cm), 60” (152.4cm)  
 Additional lengths can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies. Made in USA