



Distributor of Pomona Electronics: Excellent Integrated System Limited

Datasheet of 5259-36-0 - RETRACT SHEATH PLUG/JACK 36" BLK

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[5259-36-0](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona[®]

Model 5259
Retractable Sheath Banana Plug
To In-Line Banana Jack

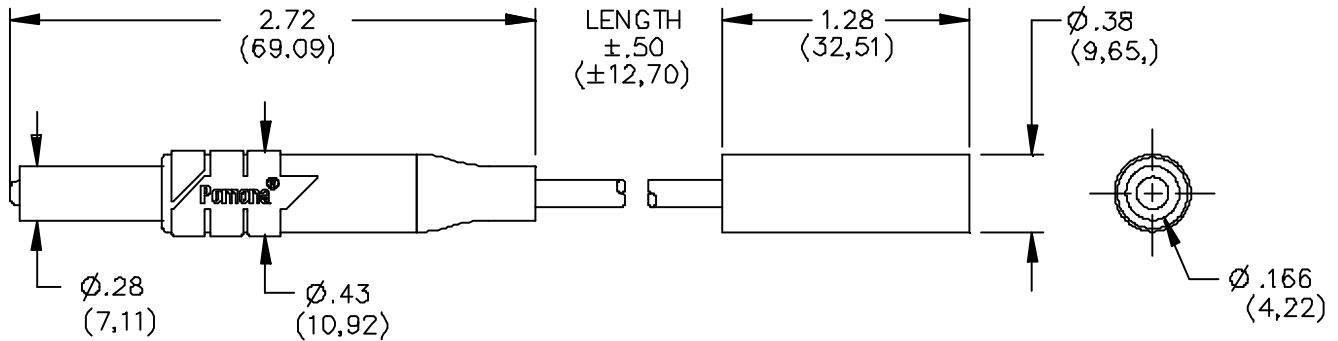

MATERIALS:

Retractable Sheath Banana Plug:

- Plug Body: Brass, Nickel Plated.
- Banana Plug Spring: Beryllium Copper.
- Compression Spring: Stainless Steel
- Tip: Nylon, Color Matches Color of Wire.
- Insulation: Nylon Molded to the Plug Body and Wire. Color Matches Color of Wire.
- Wire: 18 AWG, Stranding 65 x 36 t.c., PVC Insulated, .144 (3.66cm) O.D.
- Marking: POMONA 5259-XX
- Color: Referenced by Part Number.

In-Line Banana Jack:

- Jack Body: Brass, Nickel Plated.
- Insulation: Polypropylene Molded to the Jack Body and Wire. Color Matches Color of wire.
- Marking: POMONA ELECTRONICS CALIF.

RATINGS:

- Operating Temperature: +55°C (+131°F) Max.
- Operating Voltage: 1000 VRMS.
- Operating Current: 10 Amperes Max.

ORDERING INFORMATION: Model 5259-XX-*

XX = Wire Length, Standard Lengths: 12" (30,48cm), 24" (60,96cm), 36" (91,44cm), 48" (121,92cm) & 60" (152,4cm). Additional lengths can be quoted upon request.

* = Color, -0 Black, -2 Red

Ordering Example: 5259-12-2 Patch Cord is 12" (30,48cm), Color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA