## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Pomona Electronics 5342

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>


### **Distributor of Pomona Electronics: Excellent Integrated System Limited**

Datasheet of 5342 - BNC MALE 3LUG-3 ALLIGATOR CABLE

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

# Pomona®

### Model 4725 & 5342 Triaxial BNC Male 2 & 3 Lug To Insulated Alligators Cable Assembly

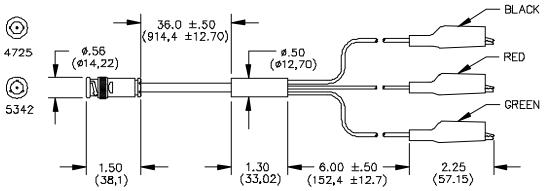

#### **FEATURES:**

- Cable assembly is designed to mate to triaxial BNC style jacks with 2 lugs (Model 4725) or 3 lugs (Model 5342). Lug positioning is as noted above on the connector end view figures.
- Cable schematic is green alligator to shell, red alligator to center contact & black alligator to outer contact.
- Triaxial connector and alligators are tarnish resistant.
- Triaxial Cable/Alligator breakout is molded over with PVC for superior strength.
- Alligator jaws open up to .300" (7,62mm) for attachment to most test terminals.

#### **MATERIALS:**

Triaxial (Male) 2 Lug Bayonet BNC (Style 4725) & 3 Lug Bayonet BNC (Style 5342)

Body and Fittings: Brass, Nickel Plated

Intermediate and Center Contacts: Brass, Gold Plated

Cable: Belden 9222. Triaxial conductors 20 AWG, stranding 7 x 28 t.c., 50 Ohm Impedance

Polyethylene insulation, shields, tinned copper, .242" (6.15 mm) O.D., Color: Yellow

Cable Length: 36" (91.44cm)

Marking: "POMONA 4725 or 5342".

Molded Breakout: PVC molded to breakout leads and cable, Color: Black

Breakout Leads: 20 AWG, 41 x 36 t.c., PVC Insulated, .087" (2.21 mm) O.D., Color: Black, Red Green

Alligators: Steel, Nickel Plated

Insulators: Vinyl. Colors: Black, Red and Green

**RATINGS:** 

Operating Temperature: +50°c (+122°F) Max.

Operating Voltage: 150 VRMS

**ORDERING INFORMATION:** Models 4725 & 5342

Ordering Example: 4725 is a two lug Triaxial Cable Assembly with a 36" (91,44cm) cable length.

Custom lengths can be quoted upon request.

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS
S\Engineering\Release\DataSheet\FlukeDataSheet\d4725\_5342\_1\_01.doc

Pomona*ACCESS* **90400** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

Page 1 of 1