

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


Pomona Electronics 5952A

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



Pomona®

Model 5952A Adjustable Tip Test Probe Set

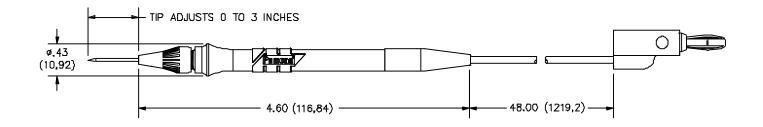

FEATURES:

- Slim retractable probe fully insulated to within 1/8" (3,18) of tip
- Needle point tip adjusts to desired length from 0-3" (0-76mm)
- Stainless Steel needle point easily pierces varnish and thin insulation
- Tip can be re-pointed if necessary
- Multi-stacking Banana plug molded directly on the wire
- Banana plug spring is nickel plated Beryllium Copper for long insertion life
- 4 foot test lead wire is silicone insulated for high temperature resistance. Also remains flexible at low temperature.

MATERIALS:

Probe Body – Polypropylene and PVC, color: one black, one red. Tip: Stainless Steel Wire: 20 AWG, Silicone insulation

RATINGS: Operating Voltage: 30VAC/60VDC Current: 3 Amperes

ORDERING INFORMATION: Model 5952A - (Includes a set of one black and one red test lead).

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 7/3/02 SY/EH/LS
 Sales: 800-490-2361
 Fax: 888-403-3360

 Last saved by Laura Goldberg
 Technical Assistance: 800-241-2060

PomonaACCESS 90808 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com Page 1 of 1

C:\Laura Goldberg\FlukeDataSheet\d5952A_1_02.doc