

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)  
[6252](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Pomona®

**Model 6252**  
**IEC1010 Compliant Test**  
**Lead Coupler**

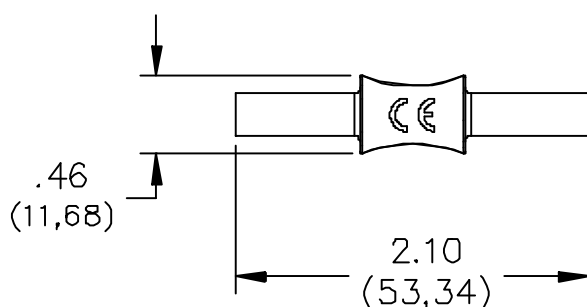

**FEATURES:**

- Interfaces to safety style sheathed 4 mm plugs.
- Provides a fast and easy method to splice two cables together to increase cable length.
- Complies to IEC 1010-2-031, which is the latest international safety standard for test accessories.
- For added safety, the insulation material is Polypropylene, Fire Retardant – UL94 V-2 rated.
- Mates to Pomona's Models 5907A, 5908A and 5909A flexible test leads.

**MATERIALS:**

Tubing: Brass, Nickel Plated

Insulation: Polypropylene, Color: One black and one red

**RATINGS:**

IEC 1010 2-031, Category III, P2 Compliant

Operating Temperature: 80°C (176°F) Max.

Operating Voltage: 1,000 VRMS/DC Max.

Current: 10 Amperes Max.

**ORDERING INFORMATION:** Model 6252

(Set of one black and one red)

Couplers are also included in many Pomona DMM Test Kits.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA