

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pomona Electronics](#)
[6331-96](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Pomona®

**Model 6331
 Patch Cord Dual Bantam
 Plug To Dual Bantam Plug**

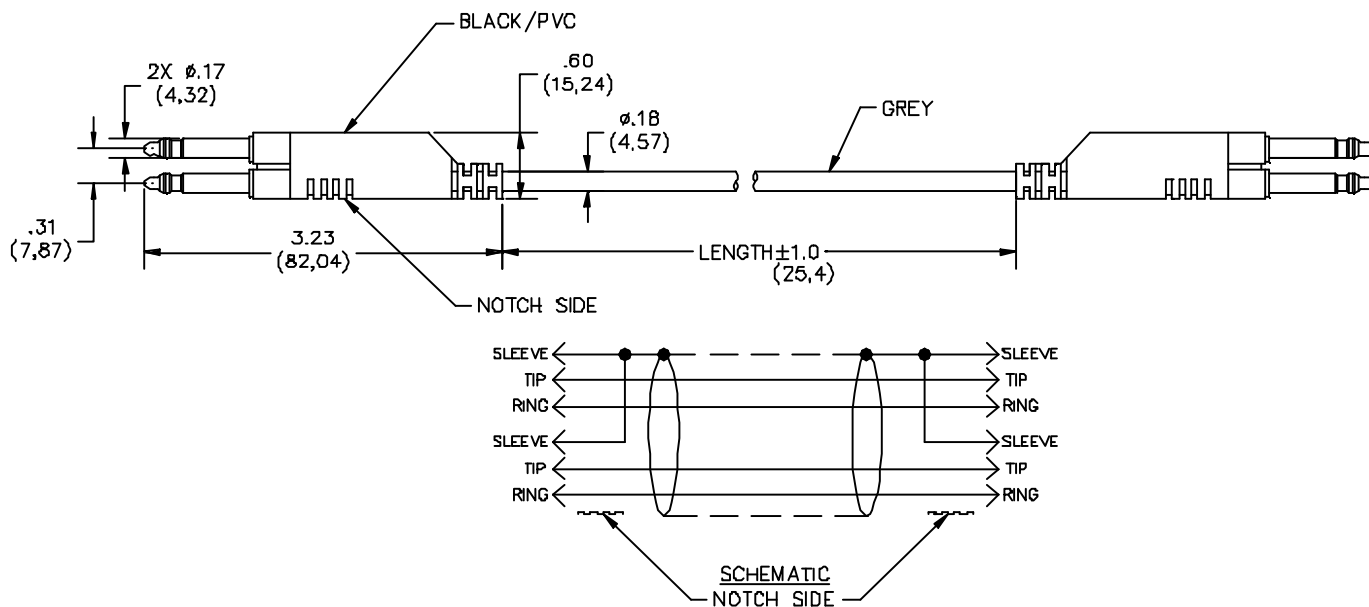

FEATURES:

- Shielded cable to reduce noise
- Provides a quick connection between dual Bantam Jacks
- Dual Bantam Plugs are molded to the cable for optimum durability

MATERIALS:

Plugs – Nickel plated brass

Cable – 4 Conductor shielded twisted pair, PVC jacket and insulation

RATINGS:

Operating Temperature: -20°C to +80°C

Operating Voltage: 300 VRMS Max.

Current: 3.36 Amperes @ 25°C Max.

Nominal Capacitance Shield to Conductor: 250pf

Nominal Capacitance Between Conductors: 150pf

ORDERING INFORMATION: Model 6331-96

Standard Length 96 Inches (2134 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA