

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ametherm](#)
[SL22 22102](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	22.0	± Max
T:	5.5	± .5
Lead Diameter	1.0	± .1
S:	7.8	± Nom
L:	40.0	± Nom
Coating Lead Run Down (straight Leads)	6.0	± Max
B:	9.30	± Nom
C:	4.00	± Nom

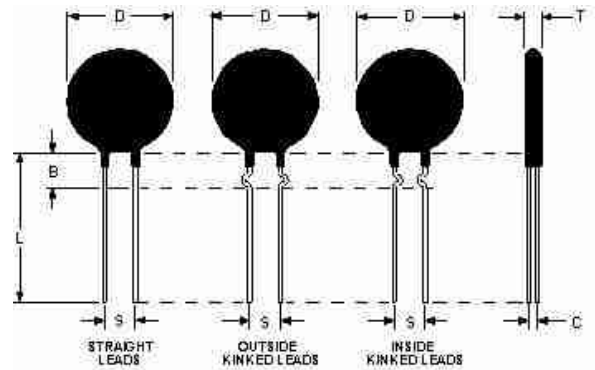

Electrical Specifications

Resistance:	220.0 Ω	± 25 %
Max Steady State Current upto 65°C:	2.00	A
Max Rec. Energy Rating:	72	J
Actual Failure Instantaneous Energy:	150	J
Maximum Capacitance @ 120 VAC:	5,001	µf
Maximum Capacitance @ 240 VAC:	1,250	µf
Resistance @ 100% Max Current:	1.47	Ω
Resistance @ 50% Max Current:	4.00	Ω
Body Temperature at 100% Max Current:	177.00	°c
Dissipation Constant:	32.4	mw/°c
Thermal Time Constant:	94	Sec.
Material Type (for Beta and Curve):	L	

SL22 22102	
Date: 04/12/2016	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Chad Terry
	Revision: A