# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Micro Commercial Components (MCC)
1N4448WX-TP

For any questions, you can email us directly: <a href="mailto:sales@integrated-circuit.com">sales@integrated-circuit.com</a>



Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



**Micro Commercial Components** 

тм



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

# 1N4448WX

## **Features**

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Fast Switching Speed
- Ultra Small Surface Mount Package
- For General Purpose Switching Applications
- High Conductance
- Halogen free available upon request by adding suffix "-HF"

# High Speed Switching Diode 200mW

## **Mechanical Data**

Case: SOD-323, Molded Plastic

Polarity: Indicated by Cathode Band

Epoxy meets UL 94 V-0 flammability rating

Moisture Sensitivity Level 1

Marking: T5


## Maximum Ratings @ 25°C Unless Otherwise Specified

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Volt.	V <sub>RM</sub>	100	V
Peak Repetitive Reverse Voltage	$V_{RRM}$		
Working Peak Reverse Voltage	$V_{RWM}$	75	V
DC Blocking Voltage	$V_R$		
RMS Reverse Voltage	V <sub>R(RMS)</sub>	53	V
Forward Continuous Current(Note1)	I <sub>FM</sub>	500	mA
Average Rectified Output Current	lo	250	mA
Non-Repetitive Peak @ t=1.0us	Ігѕм	4	A
Forward Surge Current @ t=1.0s	-	2	Α
Power Dissipation(Note 1)	Pd	200	mW
Thermal Resistance(Note 1)	$R_{\theta JA}$	625	K/W
Operation/Storage Temp. Range	Тј, Тѕтс	-65 to +150	°C


# Electrical Characteristics @ 25°C Unless Otherwise Specified

Charateristic	Symbol	Max	Unit	Test Cond.	
		0.720		I <sub>F</sub> =5.0mA	
Maximum Forward	Vғм	0.855	V	I <sub>F</sub> =10mA	
Voltage Drop		1		I <sub>F</sub> =100mA	
		1.25		I <sub>F</sub> =150mA	
		2.5	uA	V <sub>R</sub> =75V	
Maximum Peak	lгм	50	uA	V <sub>R</sub> =75V Tj=150°C	
Reverse Current		30	uA	V <sub>R</sub> =25V Tj=150°C	
		25	nΑ	V <sub>R</sub> =20V	
Junction Capacitance	Cj	4	pF	V <sub>R</sub> =0V, f=1.0MHz	
Reverse Recovery Time	trr	4	ns	I <sub>F</sub> =I <sub>R</sub> =10mA, I <sub>rr</sub> =0.1I <sub>R</sub> , R <sub>L</sub> =100 OHM	

Notes: 1. Valid provided that terminals are kept at ambient temperature

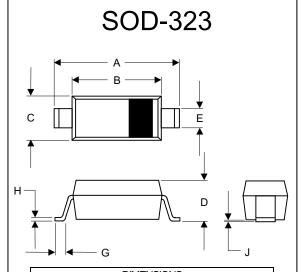

	DIMENSIONS				
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
Α	.090	.107	2.30	2.70	
В	.063	.071	1.60	1.80	
С	.045	.053	1.15	1.35	
D	.031	.045	0.80	1.15	
Е	.010	.016	0.25	0.40	
G	.004	.018	0.10	0.45	
Н	.004	.010	0.10	0.25	
J		.006		0.15	

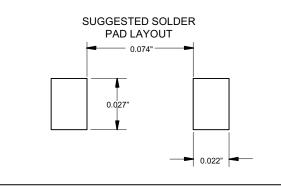





Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

# 1N4448WX



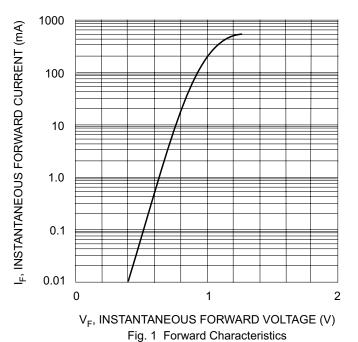

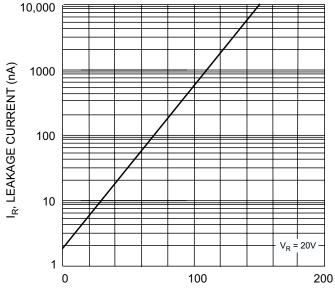

T<sub>j</sub>, JUNCTION TEMPERATURE (°C) Fig. 2 Leakage Current vs Junction Temperature

# Distributor of Micro Commercial Components (MCC): Excellent Integrated System Limite

Datasheet of 1N4448WX-TP - DIODE GEN PURP 75V 250MA SOD323

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



**Micro Commercial Components** 

## Ordering Information:

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.