

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[International Rectifier \(Infineon Technologies Americas Corp.\)
IRF7309TRPBF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


International
IR Rectifier

PD - 95014A

IRF7309PbF

HEXFET® Power MOSFET

- Generation V Technology
- Ultra Low On-Resistance
- Dual N and P Channel Mosfet
- Surface Mount
- Available in Tape & Reel
- Dynamic dv/dt Rating
- Fast Switching
- Lead-Free




	N-Ch	P-Ch
V_{DS}	30V	-30V
$R_{DS(on)}$	0.050Ω	0.10Ω

Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve the lowest possible on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design for which HEXFET Power MOSFETs are well known, provides the designer with an extremely efficient device for use in a wide variety of applications.

The SO-8 has been modified through a customized leadframe for enhanced thermal characteristics and multiple-die capability making it ideal in a variety of power applications. With these improvements, multiple devices can be used in an application with dramatically reduced board space. The package is designed for vapor phase, infra-red, or wave soldering techniques. Power dissipation of greater than 0.8W is possible in a typical PCB mount application.



SO-8

Absolute Maximum Ratings

Parameter		Max.		Units
		N-Channel	P-Channel	
I_D @ $T_A = 25^\circ\text{C}$	10 Sec. Pulse Drain Current, V_{GS} @ 10V	4.7	-3.5	A
I_D @ $T_A = 25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V	4.0	-3.0	A
I_D @ $T_A = 70^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V	3.2	-2.4	A
I_{DM}	Pulsed Drain Current ①	16	-12	A
P_D @ $T_A = 25^\circ\text{C}$	Power Dissipation (PCB Mount)**	1.4		W
	Linear Derating Factor (PCB Mount)**	0.011		W/°C
V_{GS}	Gate-to-Source Voltage	± 20		V
dv/dt	Peak Diode Recovery dv/dt ②	6.9	-6.0	V/ns
T_J, T_{STG}	Junction and Storage Temperature Range	-55 to + 150		°C

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JA}$	Junction-to-Amb. (PCB Mount, steady state)**	—	—	90	°C/W

** When mounted on 1" square PCB (FR-4 or G-10 Material).

For recommended footprint and soldering techniques refer to application note #AN-994.

IRF7309PbF

International
IR Rectifier

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter		Min.	Typ.	Max.	Units	Conditions
V _{(BR)DSS}	Drain-to-Source Breakdown Voltage	N-Ch	30	—	—	V	V _{GS} = 0V, I _D = 250μA
		P-Ch	-30	—	—	V	V _{GS} = 0V, I _D = -250μA
ΔV _{(BR)DSS} /ΔT _J	Breakdown Voltage Temp. Coefficient	N-Ch	—	0.032	—	V/°C	Reference to 25°C, I _D = 1mA
		P-Ch	—	-0.037	—	V/°C	Reference to 25°C, I _D = -1mA
R _{DS(ON)}	Static Drain-to-Source On-Resistance	N-Ch	—	—	0.050	Ω	V _{GS} = 10V, I _D = 2.4A ③
			—	—	0.080	Ω	V _{GS} = 4.5V, I _D = 2.0A ③
			—	—	0.10	Ω	V _{GS} = -10V, I _D = -1.8A ③
		P-Ch	—	—	0.16	Ω	V _{GS} = -4.5V, I _D = -1.5A ③
V _{GS(th)}	Gate Threshold Voltage	N-Ch	1.0	—	—	V	V _{DS} = V _{GS} , I _D = 250μA
		P-Ch	-1.0	—	—	V	V _{DS} = V _{GS} , I _D = -250μA
g _{fs}	Forward Transconductance	N-Ch	5.2	—	—	S	V _{DS} = 15V, I _D = 2.4A ③
		P-Ch	2.5	—	—	S	V _{DS} = -24V, I _D = -1.8A ③
I _{DSS}	Drain-to-Source Leakage Current	N-Ch	—	—	1.0	μA	V _{DS} = 24V, V _{GS} = 0V
		P-Ch	—	—	-1.0	μA	V _{DS} = -24V, V _{GS} = 0V
I _{GSS}	Gate-to-Source Forward Leakage	N-Ch	—	—	25	μA	V _{DS} = 24V, V _{GS} = 0V, T _J = 125°C
		P-Ch	—	—	-25	μA	V _{DS} = -24V, V _{GS} = 0V, T _J = 125°C
I _{GSS}	Gate-to-Source Forward Leakage	N-P	—	—	±100	nA	V _{GS} = ±20V
Q _g	Total Gate Charge	N-Ch	—	—	25	nC	N-Channel
		P-Ch	—	—	25	nC	I _D = 2.6A, V _{DS} = 16V, V _{GS} = 4.5V ③
Q _{gs}	Gate-to-Source Charge	N-Ch	—	—	2.9	nC	P-Channel
		P-Ch	—	—	2.9	nC	I _D = -2.2A, V _{DS} = -16V, V _{GS} = -4.5V
Q _{gd}	Gate-to-Drain ("Miller") Charge	N-Ch	—	—	7.9	nC	
		P-Ch	—	—	9.0	nC	
t _{d(on)}	Turn-On Delay Time	N-Ch	—	6.8	—	ns	N-Channel
		P-Ch	—	11	—	ns	V _{DD} = 10V, I _D = 2.6A, R _G = 6.0Ω, R _D = 3.8Ω ③
t _r	Rise Time	N-Ch	—	21	—	ns	
		P-Ch	—	17	—	ns	
t _{d(off)}	Turn-Off Delay Time	N-Ch	—	22	—	ns	P-Channel
		P-Ch	—	25	—	ns	V _{DD} = -10V, I _D = -2.2A, R _G = 6.0Ω, R _D = 4.5Ω
t _f	Fall Time	N-Ch	—	7.7	—	ns	
		P-Ch	—	18	—	ns	
L _D	Internal Drain Inductance	N-P	—	4.0	—	nH	Between lead tip and center of die contact
L _S	Internal Source Inductance	N-P	—	6.0	—	nH	
C _{iss}	Input Capacitance	N-Ch	—	520	—	pF	N-Channel
		P-Ch	—	440	—	pF	V _{GS} = 0V, V _{DS} = 15V, f = 1.0MHz ③
C _{oss}	Output Capacitance	N-Ch	—	180	—	pF	P-Channel
		P-Ch	—	200	—	pF	V _{GS} = 0V, V _{DS} = -15V, f = 1.0MHz
C _{rss}	Reverse Transfer Capacitance	N-Ch	—	72	—	pF	
		P-Ch	—	93	—	pF	

Source-Drain Ratings and Characteristics

	Parameter		Min.	Typ.	Max.	Units	Conditions
I _S	Continuous Source Current (Body Diode)	N-Ch	—	—	1.8	A	
		P-Ch	—	—	-1.8	A	
I _{SM}	Pulsed Source Current (Body Diode) ①	N-Ch	—	—	16	A	
		P-Ch	—	—	-16	A	
V _{SD}	Diode Forward Voltage	N-Ch	—	—	1.0	V	T _J = 25°C, I _S = 1.8A, V _{GS} = 0V ③
		P-Ch	—	—	-1.0	V	T _J = 25°C, I _S = -1.8A, V _{GS} = 0V ③
t _{rr}	Reverse Recovery Time	N-Ch	—	47	71	ns	N-Channel
		P-Ch	—	53	80	ns	T _J = 25°C, I _F = 2.6A, di/dt = 100A/μs ③
Q _{rr}	Reverse Recovery Charge	N-Ch	—	56	84	nC	P-Channel
		P-Ch	—	66	99	nC	T _J = 25°C, I _F = -2.2A, di/dt = 100A/μs
t _{on}	Forward Turn-On Time	N-P	Intrinsic turn-on time is negligible (turn-on is dominated by L _S +L _D)				

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 23)

② N-Channel I_{SD} ≤ 2.4A, di/dt ≤ 73A/μs, V_{DD} ≤ V_{(BR)DSS}, T_J ≤ 150°C

P-Channel I_{SD} ≤ -1.8A, di/dt ≤ 90A/μs, V_{DD} ≤ V_{(BR)DSS}, T_J ≤ 150°C

③ Pulse width ≤ 300μs; duty cycle ≤ 2%.

International
IR Rectifier

IRF7309PbF

N-Channel

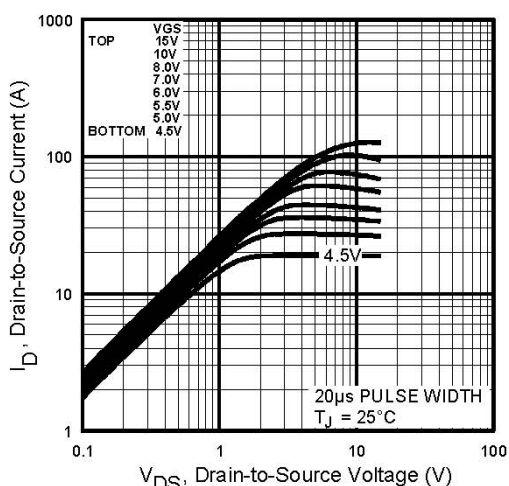


Fig 1. Typical Output Characteristics,
 $T_J = 25^\circ\text{C}$

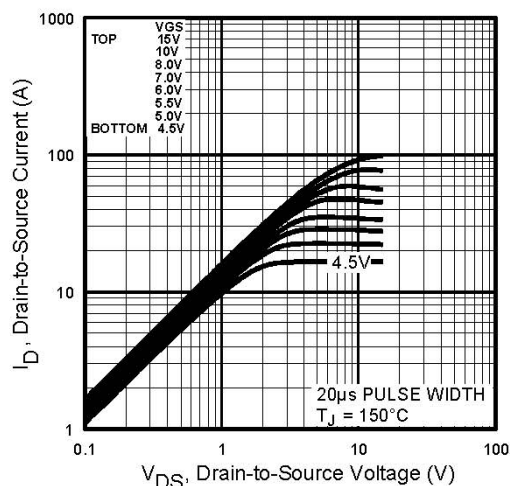


Fig 2. Typical Output Characteristics,
 $T_J = 150^\circ\text{C}$

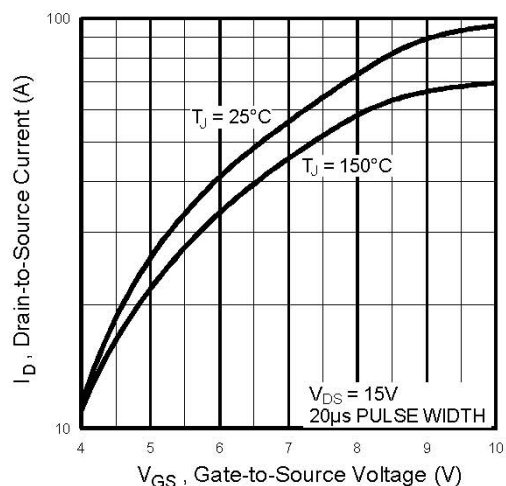


Fig 3. Typical Transfer Characteristics

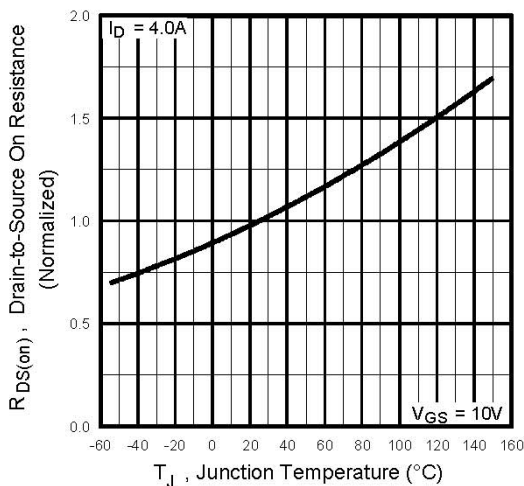


Fig 4. Normalized On-Resistance
Vs. Temperature

IRF7309PbF

International
IR Rectifier

N-Channel

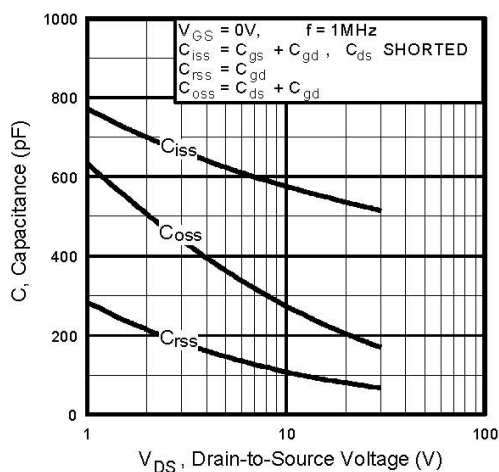


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

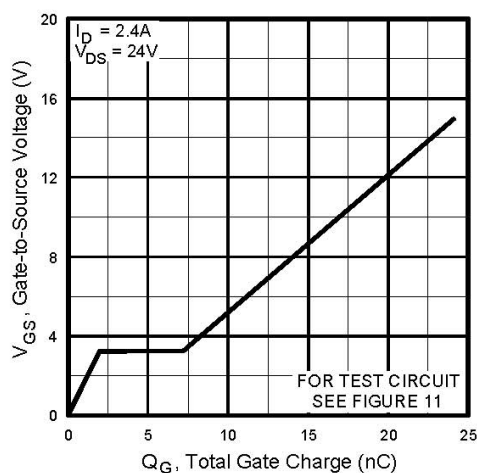


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

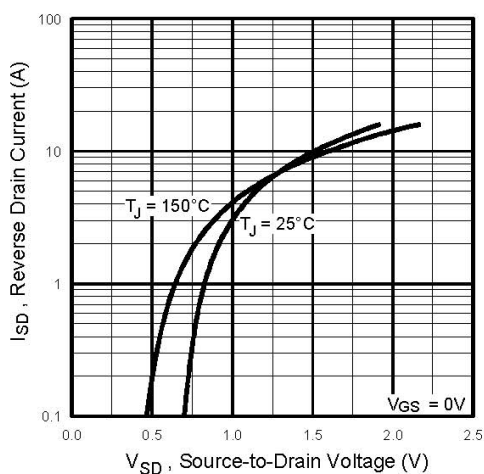


Fig 7. Typical Source-Drain Diode Forward Voltage

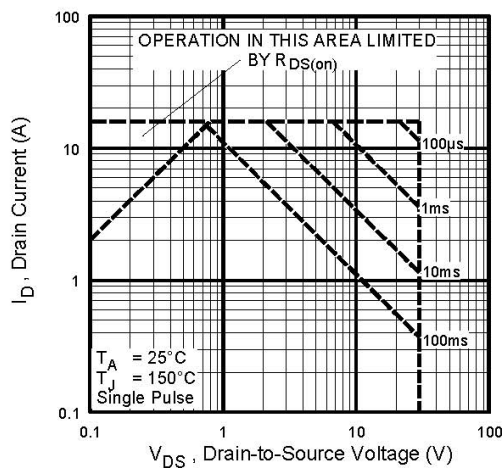


Fig 8. Maximum Safe Operating Area

International
IR Rectifier

IRF7309PbF

N-Channel

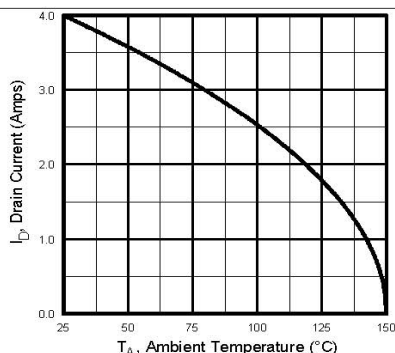


Fig 9. Max. Drain Current Vs. Ambient Temp.




Fig 11a. Gate Charge Test Circuit




Fig 10a. Switching Time Test Circuit




Fig 10b. Switching Time Waveforms




Fig 11b. Basic Gate Charge Waveform

P-Channel

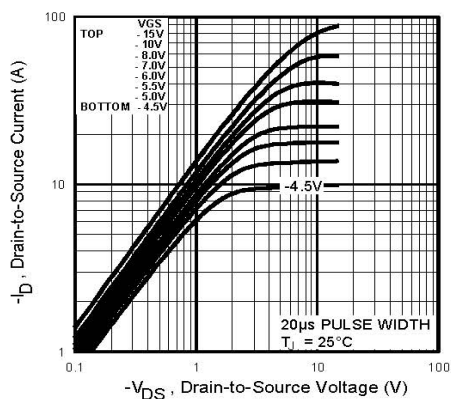


Fig 12. Typical Output Characteristics, $T_J = 25^\circ C$





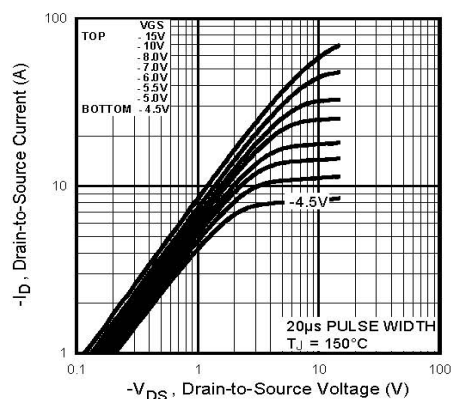


Fig 13. Typical Output Characteristics, $T_J = 150^\circ C$

IRF7309PbF

International
IR Rectifier

P-Channel

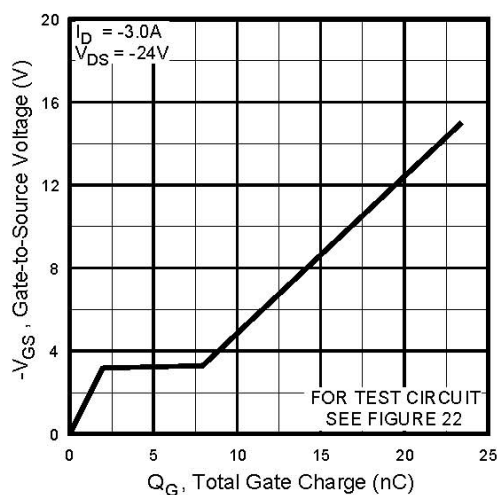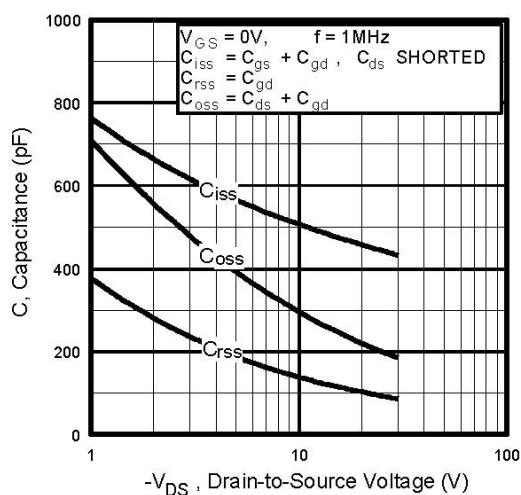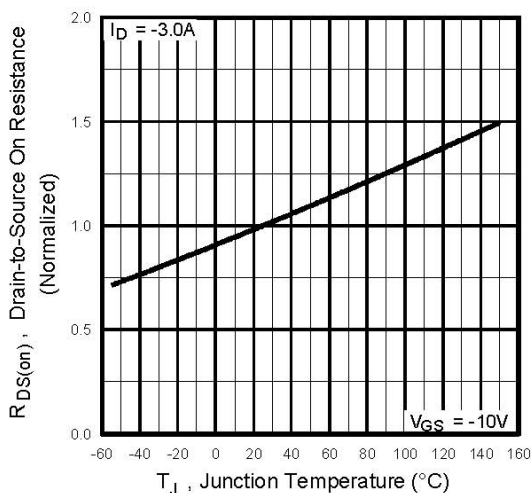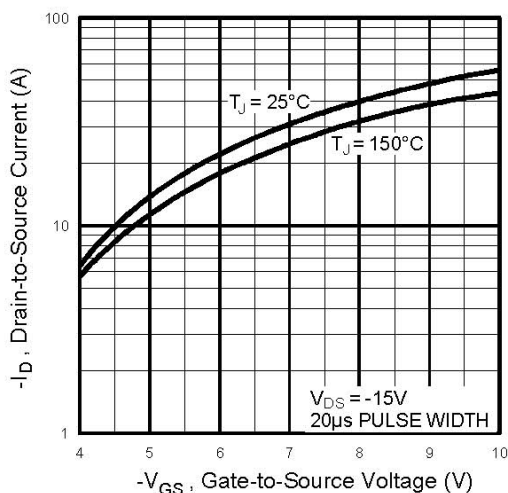

International
IR Rectifier

IRF7309PbF

P-Channel

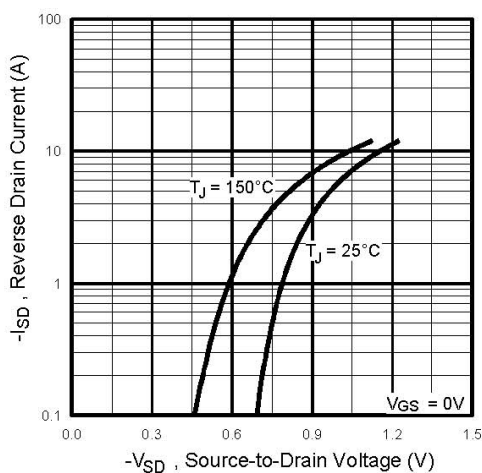


Fig 18. Typical Source-Drain Diode Forward Voltage

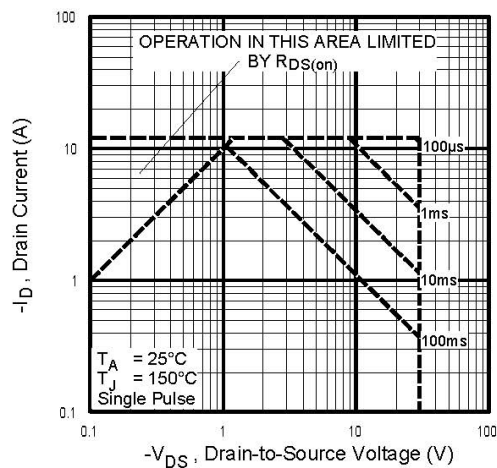


Fig 19. Maximum Safe Operating Area

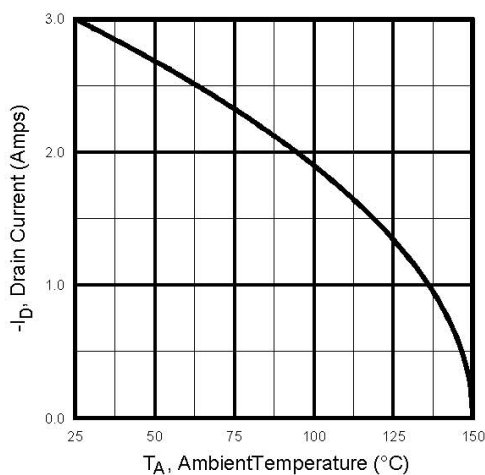


Fig 20. Max. Drain Current Vs. Ambient Temp.

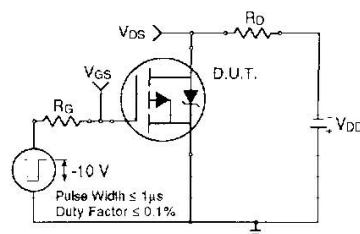


Fig 21a. Switching Time Test Circuit

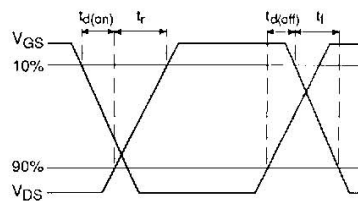


Fig 21b. Switching Time Waveforms

IRF7309PbF

International
IR Rectifier

P-Channel

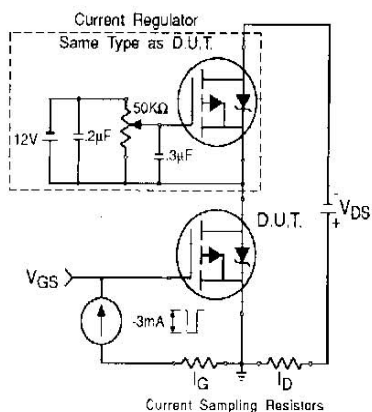


Fig 22b. Gate Charge Test Circuit

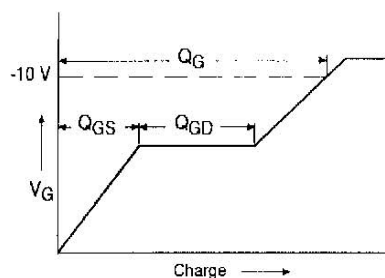


Fig 22b. Basic Gate Charge Waveform

N- and P-Channel


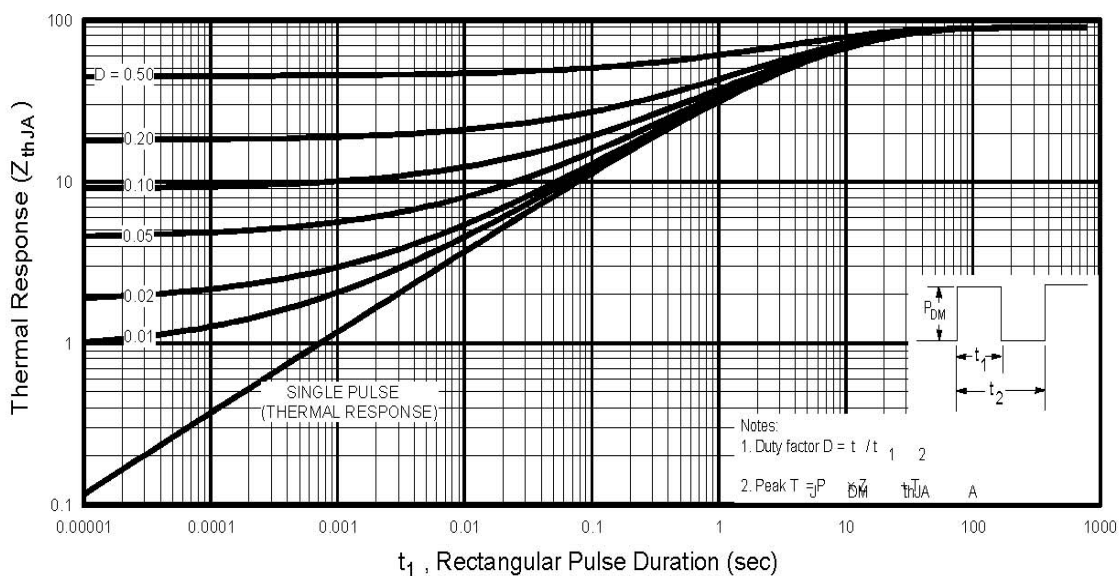


Fig 23. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

International
IR Rectifier


IRF7309PbF

Peak Diode Recovery dv/dt Test Circuit

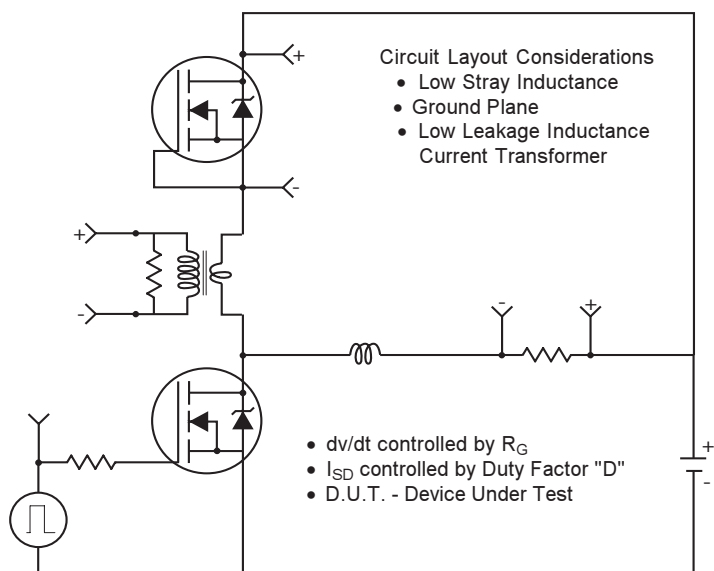

* Reverse Polarity for P-Channel

** Use P-Channel Driver for P-Channel Measurements

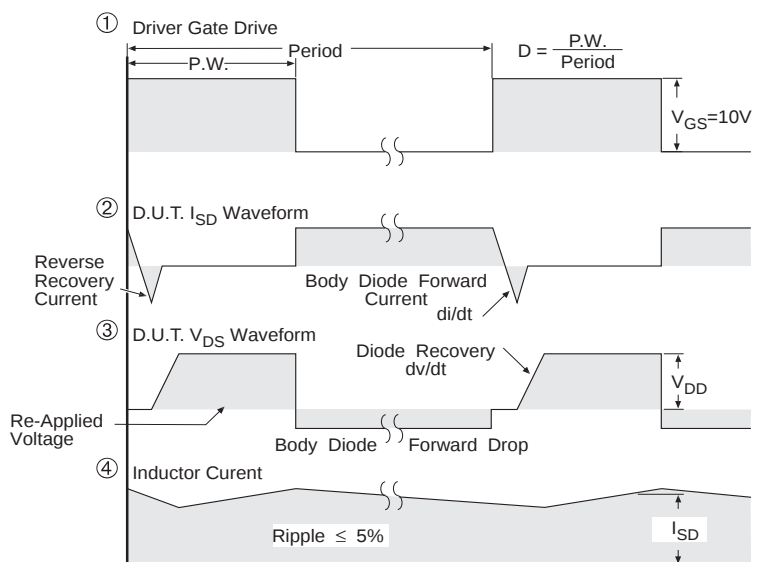

*** $V_{GS} = 5.0V$ for Logic Level and 3V Drive Devices


Fig 24. For N and P Channel HEXFETS

IRF7309PbF



International
IR Rectifier

SO-8 Package Details

Dimensions are shown in millimeters (inches)

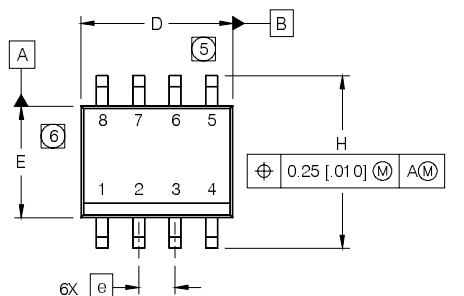


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050	BASIC	1.27	BASIC
e1	.025	BASIC	0.635	BASIC
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°

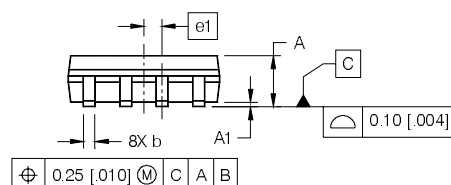

NOTES:


1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
5. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 [0.006].
6. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 [0.010].
7. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.

FOOTPRINT

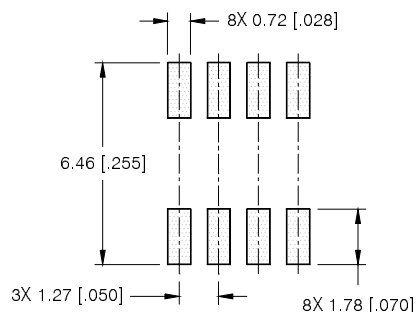

SO-8 Part Marking


EXAMPLE: THIS IS AN IRF7101 (MOSFET)

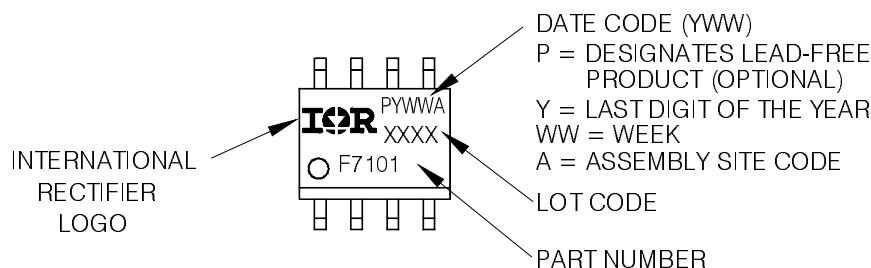

International
IR Rectifier


IRF7309PbF

SO-8 Tape and Reel

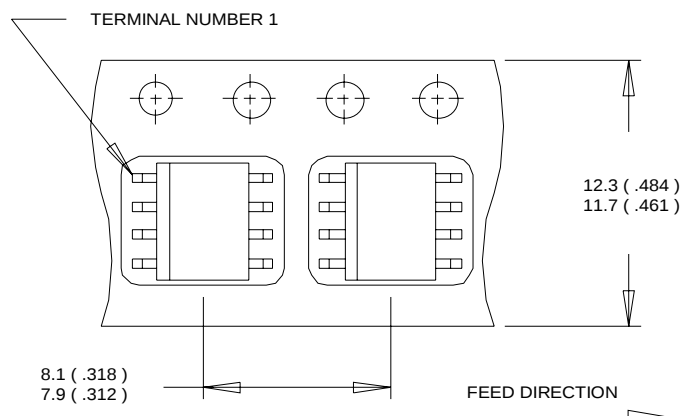

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

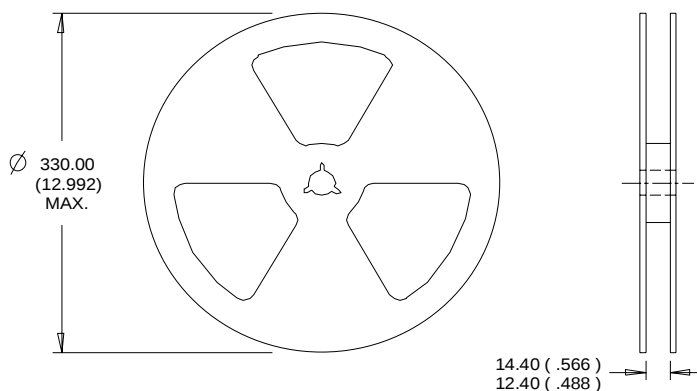

NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.04/2007