

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Littelfuse](#)  
[03420004HXL](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## 342 Series Panel Mount Enclosed Fuse Holders for 3AG/AB Fuses




### Dimensions



General Application / Straight Terminal Product Dimensions

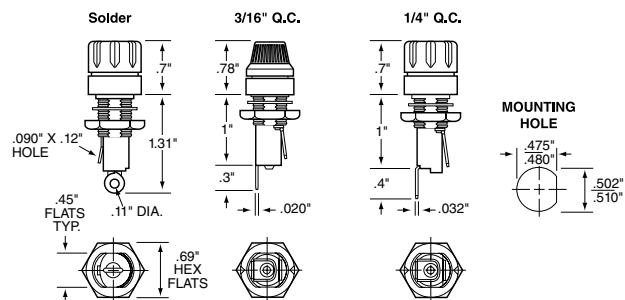

General Application / Right Angle Terminal Product Dimensions

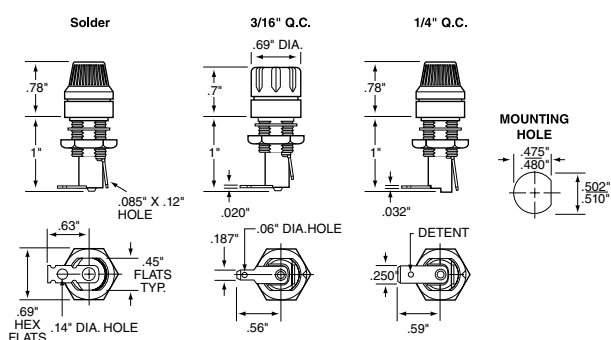

Watertight Product Dimensions

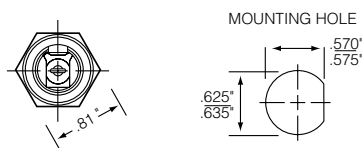

### Product Characteristics

General Application Products	Watertight Product
<b>Compatible Fuses</b>	3AG/AB
<b>Electrical</b>	Rated at 20 amperes for any voltage up to 250.
<b>Ambient Temperature</b>	-40°C to +85°C.
<b>Dielectric Strength</b>	2400 volts minimum.
<b>Mounting</b>	Withstands 15 lb.-in. mounting torque; maximum panel thickness: .187"
<b>Molded Parts</b>	Black thermoplastic (UL94 V-0).
<b>Seal</b>	Neoprene washer provide drip-proof protection on the front side of the panel (upon request)
<b>Terminals</b>	Copper & copper alloy. Tin plated, except 1/4" Quick-Connect terminals are nickel plated.
<b>Hardware</b>	Comes with a mounting nut and neoprene washer

### Agency Approvals

Agency	Agency File Number
	E14721
	7316 (*Except 342 006)

### Ordering Information

Body Terminal Type		Catalog Number	
Angle	Connect	Fluted Knob	Knurled Knob
General Application Products:			
Straight	Solder	342 014	342 012
	3/16" Q.C.	342 038	342 058
	1/4" Q.C.	342 838	342 858
Right Angle	Solder	342 004	342 022
	3/16" Q.C.	342 028	342 048
	1/4" Q.C.	342 828	342 848
Watertight Product:			
Straight	Solder	342 006 *	Not Applicable

NOTE: Ensure that proper fuse re-rating is factored in fuseholder selection.

### Additional Information



Datasheet



Resources



Samples