

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[66010-001LF](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



All rights reserved. Reproduction or use in any form without written authority from the proprietor. Property © 2002 ELECTRONICS. Copyright 2002 ELECTRONICS by

Tous droits réservés. Toute réimpression ou utilisation sans autorisation écrite du propriétaire. Propriété © 2002 ELECTRONICS. Droits de reproduction 2002 ELECTRONICS by

PRODUCT No	DIM A	DIM B	HOUSING MATERIAL	CONTACT PLATING	REMARKS
66010-001/-001LF	4.57 <sup>+0.10</sup> / <sub>-0.10</sub>	3.81 <sup>+0.10</sup> / <sub>-0.10</sub>	SUPER TOUCH NYLON UL 94V-0 GRAY	.76m / 30m "AU OVER 2.5m / 100m "Ni	
66010-002/-002LF	4.45 ± 0.38 / 1.75 ± 0.15	4.45 ± 0.38 / 1.75 ± 0.15		.76m / 30m "AU OVER 2.5m / 100m "Ni	
<del>66010-003</del>	<del>3.90 ± 0.30 / 1.18 ± 0.12</del>	<del>3.90 ± 0.30 / 1.18 ± 0.12</del>		<del>.76m / 30m "AU OVER 2.5m / 100m "Ni</del>	<del>MADE FROM 66010-001 CR -002</del>
66010-004/-004LF	4.57 <sup>+0.10</sup> / <sub>-0.10</sub>	3.81 <sup>+0.10</sup> / <sub>-0.10</sub>	SUPER TOUCH NYLON UL 94V-0 GRAY	.76m / 30m "GXT	
66010-005/-005LF	4.57 <sup>+0.10</sup> / <sub>-0.10</sub>	3.81 <sup>+0.10</sup> / <sub>-0.10</sub>	SUPER TOUCH NYLON UL 94V-0 GRAY	.76m / 30m "AU OVER 2.5m / 100m "Ni	
66010-006/-006LF	4.57 <sup>+0.10</sup> / <sub>-0.10</sub>	3.81 <sup>+0.10</sup> / <sub>-0.10</sub>	SUPER TOUCH NYLON UL 94V-0 BLACK	.76m / 30m "GXT	

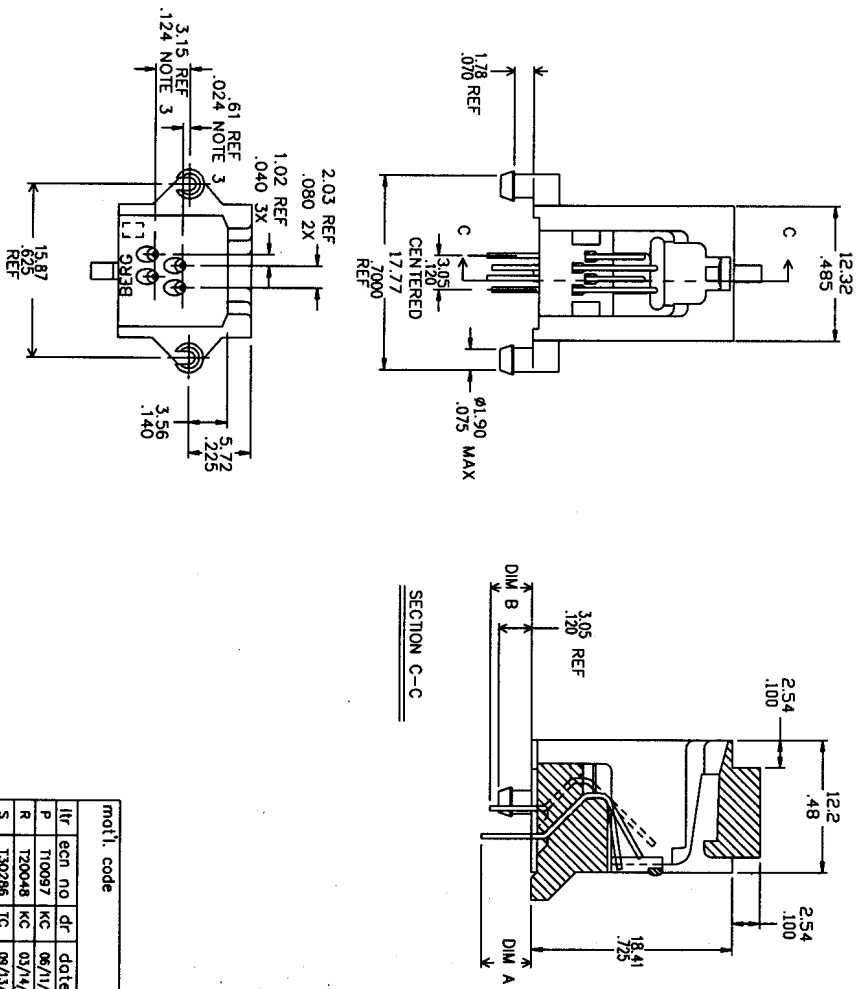

- NOTES:
- FOR VISUAL MECHANICAL AND FUNCTIONAL REQUIREMENTS SEE SPECIFICATION BUS-12-084.
  - GOLD WIRE MATERIAL: PHOS BRONZE ALLOY. UNS-CS1000, 135-150M PSI TENSILE PLATING: SEE TABLE
  - DIMENSIONAL TOLERANCE: ±.25/±.010 AT BASE ±.64/±.025 AT TIP
  - FOR ADDITIONAL APPLICATION AND MOUNTING INFORMATION SEE DRAWING TA-390.
  - HOUSING MATERIAL: SEE TABLE.
  - TEST METHOD PER UL-1863, SECTION 22.2
  - THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
  - IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

ltr	ecm no	dr	date	tolerances unless otherwise specified	CUSTOMER COPY	FCI Electronics	www.fcielectronics.com
P	110097	KC	06/11/91	.0 ± 0.25	projection	BERG MOD JACK ASSY	
R	120048	KC	02/14/92	.00 ± 0.13	scale	616 PCB	
S	130286	TC	09/13/93	.000 ± 0.05	MM/INCH	product family MOD JACK	code TMN
T	166059	C L	02/13/96	± .2"	scale	size dwg no 66010	sheet 1 of 1
U	180392	C C	02/22/01		scale		
V	nos-003	YS	02/16/05		scale		
Sheet index	revision	sheet					
1	V	1					