

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)
[HM2S10PE5100N9LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


Tous droits strictement réservés. Reproduction ou utilisation non autorisée sans la permission écrite de la propriété de FCI. Droits de reproduction FCI.





All rights strictly reserved. Reproduction or issue to third parties in any form without the written authority from the proprietor. Property of FCI. Copyright FCI.

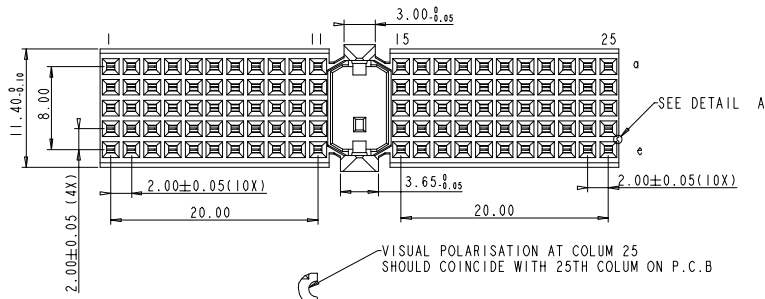

VISUAL POLARISATION AT COLUM 25 SHOULD COINCIDE WITH 25TH COLUMN ON P.C.B

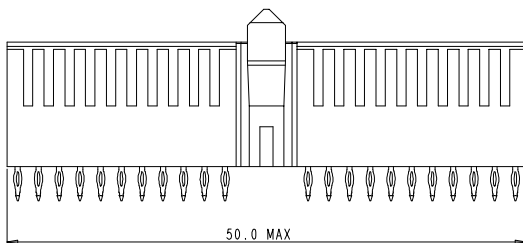

LAY OUT
P.C.B -HOLE
(FRONT SIDE)

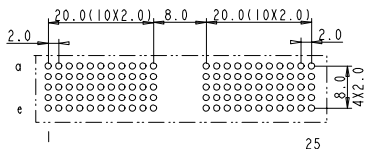

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 mΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

LEAD FREE INDICATOR : LF=LEAD FREE

NOTES

1. " " PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC 201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION	mason	14-09-01
B	104-0109	LEX	27-11-04
C	0605-027	mason	02-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		Tolerance	projection
Heat treat		1DEC9.2 1DEC 2DEC3.1 2DEC ANGLE3.1 2DEC H300EN	MM
Plating/Finish			
Dr	M.Fret	30-10-97	size A4
Eng			Scale 2.000
Chr			ECN
Appr			REL Level
Product family	MILLIPACS		
Model Name			
Model Revision			
FCI	title	MILLIPACS 2/TYPE A (W/O LOC.PEG)/NO SHIELDING	Rev. D
Pro/E file	catalog no	HM2S10PE5100----	sheet 1 of 1
Part no	BSC201907007	CUSTOMER DRAWING	