

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Amphenol RE](#)  
[31-5556-RFX](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DO NOT SCALE THIS DRAWING

31-5556-RFX		REVISIONS			
DRAWING NUMBER	SYM	DESCRIPTION	DATE	E.C.O. NO.	APPR.
	A	OFFICIAL ENG. RELEASE TO MFG.	10/2/91	38063	DR



RECOMMENDED CABLE STRIPPING DIM'S

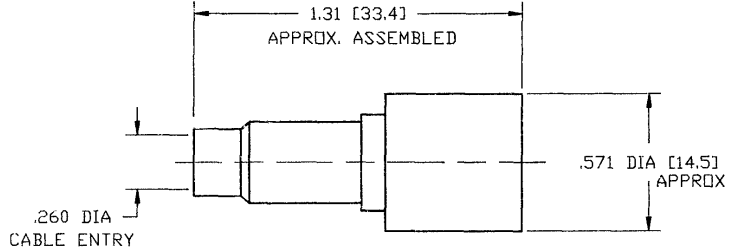

NOTES:

1. BRASS BODY, NICKEL PLATED.
2. DELRIN INSULATOR.
3. GOLD PLATED, BRASS CONTACT, .000003.
4. PACKAGED IN BAG 999-350.
5. USE AMPHENOL CRIMP TOOL #CTL-2.
6. CAPTIVATED CONTACT.
7. 3 PC. (BODY, FERRULE).
8. BUSHING SUPPLIED FOR RG-62 CABLE.

ENGLISH [METRIC]

H:\DEPT611\BNC\031\ASSY\5556RFX

PART NO.	QUAN	UOM	TEAM	DESCRIPTION	CODE	FINISH
LIST OF MATERIAL						

REMOVE ALL BURRS, BREAK CORNERS AND SHARP EDGES TO MAXIMUM UNLESS OTHERWISE SPECIFIED.

<p>ATTENTION - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request and (3) are confidential and are not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications or other data by Amphenol Corp. or by any other person to anyone for any purpose is not to be regarded by implication or otherwise as in any manner granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications or other data.</p>	<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES NOT OTHERWISE SPECIFIED ARE:</p> <table border="1"> <tr> <td>2 PLACE DECIMAL ± .015 (0.381 mm)</td> <td>3 PLACE DECIMAL ± .005 (0.127 mm)</td> <td>ANGLES ± .1°</td> </tr> </table>	2 PLACE DECIMAL ± .015 (0.381 mm)	3 PLACE DECIMAL ± .005 (0.127 mm)	ANGLES ± .1°	<p>DRAWN BY TERRI ALBERA DATE 4-23-91</p>	<p>TITLE BNC CRIMP PRESS-FIT PLUG FOR RG-59, 62 CABLE 50 OHM</p>	<p>Amphenol Corporation RF/Microwave Operations Danbury, Conn. U.S.A.</p>
	2 PLACE DECIMAL ± .015 (0.381 mm)	3 PLACE DECIMAL ± .005 (0.127 mm)	ANGLES ± .1°				
	<p>MATERIAL</p>	<p>CHECKED DATE 4-13-91</p>	<p>ENGINEER DATE 5-18-91</p>	<p>SCALE NTS SHEET OF</p>			
	<p>SPECIFICATION</p>	<p>REFERENCE DRAWING NO EAR 962370</p>	<p>QUALITY ASSURANCE DATE 9/1/91</p>	<p>CODE IDENTIFICATION DRAWING SIZE DRAWING NO</p>			
<p>FINISH</p>	<p>NEG/ENG DATE 9-17-91</p>	<p>74868 B 31-5556-RFX</p>	<p>ISSUE A</p>				