

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Quarton, Inc.](#)
[VLM-650-01-LPT](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Quarton Laser Module Part #VLM-650001 (LPA/LPT)

Mechanical Dimensions (UNITS: mm)

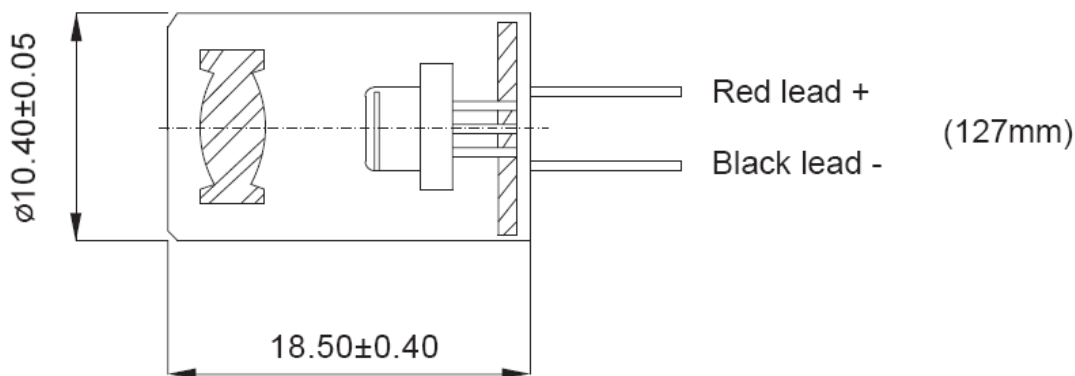

SPECIFICATIONS:	VLM-650001 LPA	VLM-650001 LPT
APC Driver Circuit	Yes	Yes
Collimating Lens	Aspherical Plastic	Aspherical Plastic
Cw Output Power (Po)	≤ 3 mW	Less than 1.0 mW
Divergence	1.6 mrad	1.6 mrad
ESD Protection	15 KV	15 KV
Housing	Brass	Brass
Laser Class / Applicable Countries	Class 3a / USA	Class 2 / Europe, Japan, USA
Mean time to failure (MTTF) 3mW 25°	10,000 Hours	10,000 Hours
Operating Current (Iop)	40 $\pm$ 15 mA	40 $\pm$ 15 mA
Operating Voltage (Vop)	3 ~ 5V	3 ~ 5V
Power Connection	Wire leads (2)	Wire leads (2)
Spot size at 5m.	6mm ($\pm$ 2mm)	6mm ($\pm$ 2mm)
Temperature Range - Operating	+10°C thru +40°C	+10°C thru +40°C
Temperature Range - Storage	-20°C thru +65°C	-20°C thru +65°C
Wavelength at peak emission (λ_p)	645 ~ 665nm	645 ~ 665nm
RoHS Compliant	Yes	Yes

Application Notes:

- For general laser sighting applications.
- Spring Leads use part #VLM-650001 SPA for Class 3a. (USA)
- Spring Leads use part #VLM-650001 SPT for Class 2. (USA, Europe, Japan)