

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
112597](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	07/29/98	—	INITIAL RELEASE
A	11/05/06	—	UPDATE DRAWING FORMAT
B	06/23/10	2062	ADD CRIMP DIMENSIONS AND CRIMP TOOL INFORMATION TO DRAWINGS

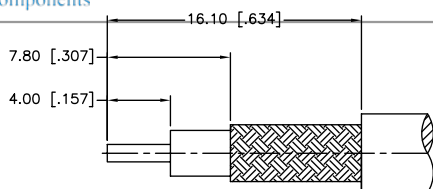

RECOMMENDED CABLE STRIPPING DIM'S

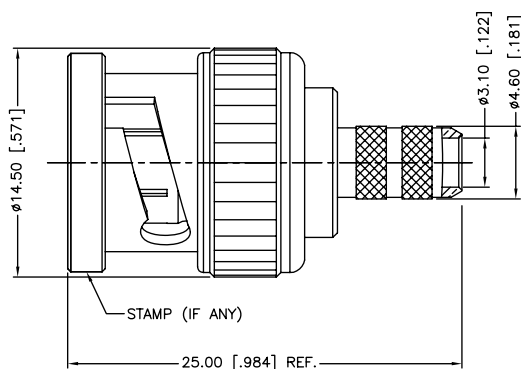

1. CRIMPED FERRULE
HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .068"
3. CRIMP TOOL: A

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± ± 0.007" .315 - 1.180 ± ± 0.015" 1.180 - 4.724 ± ± 0.020"	APPROVALS	DATE	Amphenol Connex								
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG							06/23/10		
7	WASHER	BRASS	NICKEL	1		CHECKED										
6	SPRING	SK5	NICKEL	1		ISSUED			PART DESCRIPTION BNC CRIMP PLUG (FOR LMR200 CABLE)							
5	RETAINER RING	BRASS	NICKEL	1		SHEET	1 OF 1									
4	GASKET	RUBBER	RED	1					PART NO. 112597							
3	INSULATOR	PTFE	NATURAL	1												
2	BODY	BRASS	NICKEL	1												
1	SHELL	BRASS	NICKEL	1												
	DESCRIPTION	MATERIAL	FINISH	QTY		DO NOT SCALE DRAWING	C:/CONNEX/112597.DWG		DWG. NO.	112597.DWG		REV.	B	SIZE	A	SCALE