

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
112644](#)





For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	11/08/99	INITIAL RELEASE
A	10/01/06	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

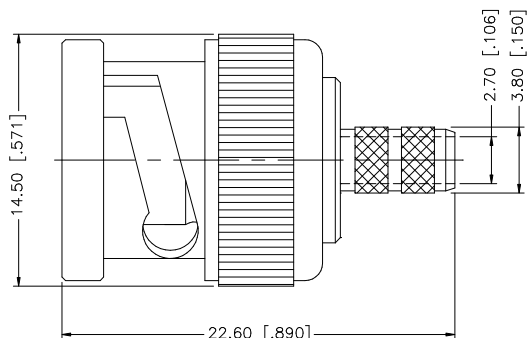

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	10/01/06							
7						CHECKED									
6						ISSUED				PART DESCRIPTION BNC CRIMP PLUG (FOR RG-179/U DOUBLE BRAID CABLE)					
5						SHEET	1 OF 1								
4	FERRULE	COPPER	NICKEL	1						PART NO.		112644			
3	CONTACT PIN	BER. COPPER	GOLD	1											
2	INSULATOR	DELIRIN	NATURAL	1											
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE		DWG. NO.		112644.DWG	REV. A	SIZE A	SCALE NA
					DO NOT SCALE DRAWING										