

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
112162](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	02/15/03	INITIAL RELEASE

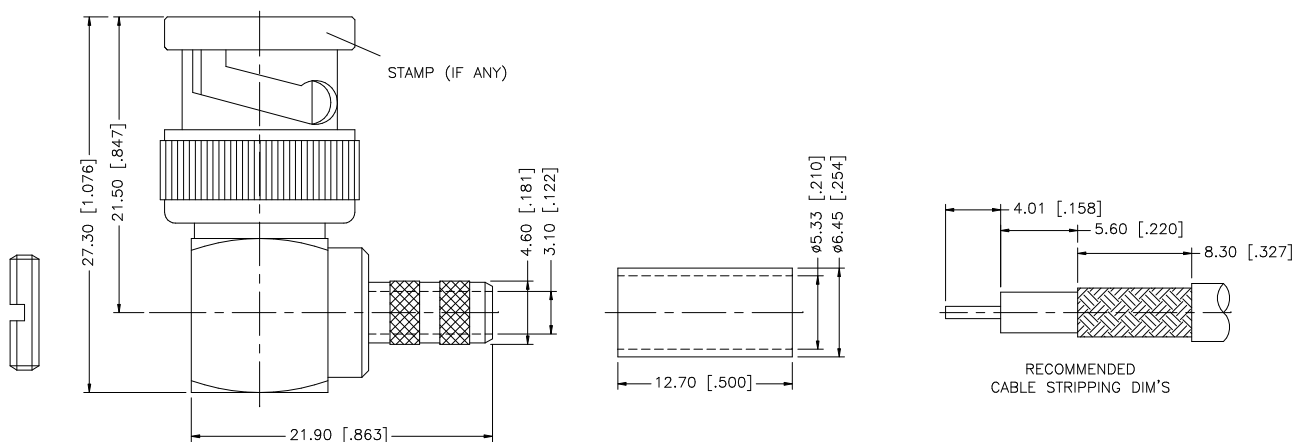

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
 2. CENTER CONTACT TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 ± ± 0.007" .315 – 1.180 ± ± 0.015" 1.180 – 4.724 ± ± 0.020"	APPROVALS	DATE	Amphenol Connex							
7						DRAWN	G.R.S.						02/15/03		
6						CHECKED			PART DESCRIPTION						
5	NUT	BRASS	NICKEL	1			ISSUED		BNC R/A CRIMP PLUG (FOR RG-58/U, 141/U CABLE)						
4	FERRULE	COPPER	NICKEL	1			SHEET	1 OF 1	PART NO.						
3	CONTACT PIN	BRASS	GOLD	1				112162							
2	INSULATOR	DELFIN	NATURAL	1		CAD FILE	C:/112/112162.DWG	DWG. NO.	112162.DWG	REV.	NC	SIZE	A	SCALE	NA
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING										