

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[112505](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	05/24/04	INITIAL RELEASE

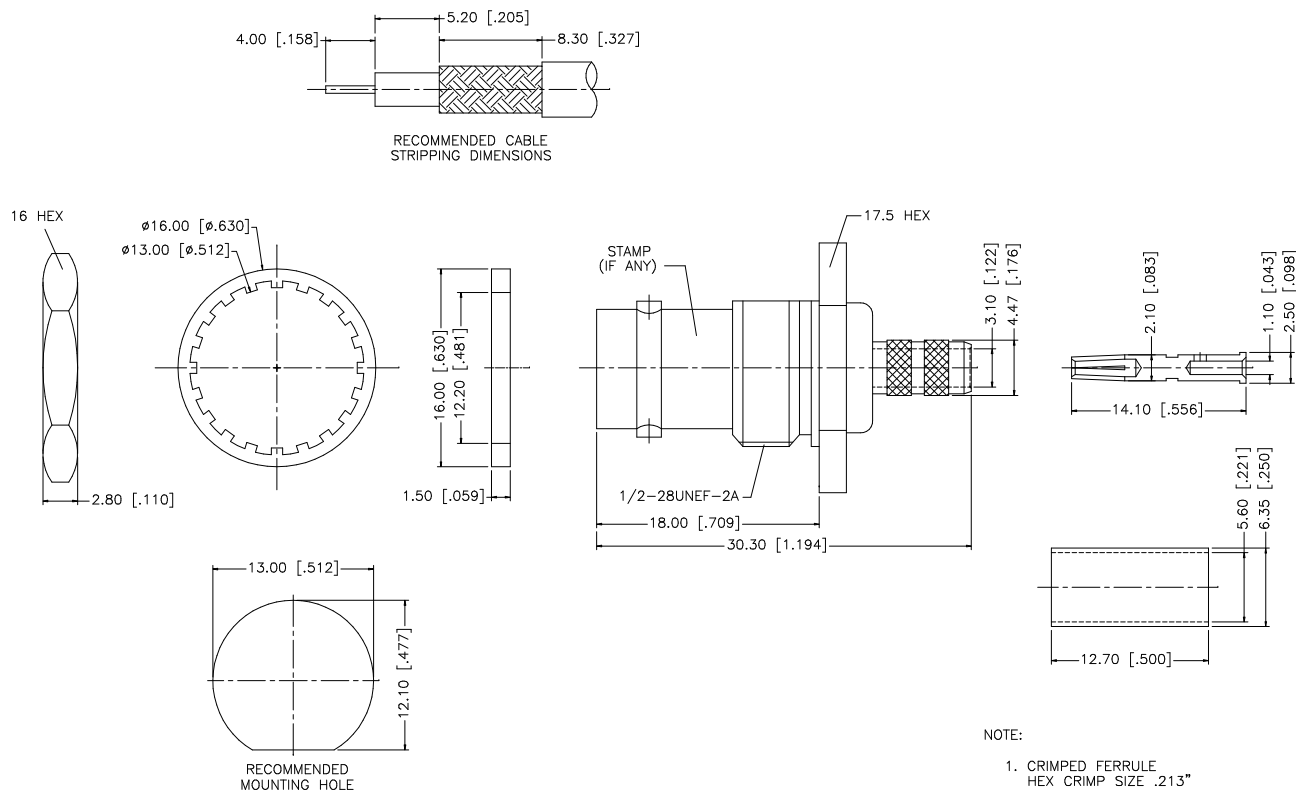

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 ± ± 0.007" .315 – 1.180 ± ± 0.015" 1.180 – 4.724 ± ± 0.020"	APPROVALS DATE	Amphenol Connex					
7	FERRULE	COPPER	NICKEL	1		DRAWN G.R.S. 05/24/04						
6	HEX NUT	BRASS	NICKEL	1		CHECKED						
5	LOCK WASHER	BRASS	NICKEL	1		ISSUED	PART DESCRIPTION BNC BULKHEAD CRIMP JACK (FOR RG-55/U, 142A/U, 223/U, 400/U CABLE)					
4	GASKET	RUBBER	RED	1								SHEET 1 OF 1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1			CAD FILE C:/112/112505.DWG	DWG. NO. 112505.DWG REV. NC SIZE A SCALE NA				
2	INSULATOR	TEFLON	NATURAL	1								
1	BODY/HOUSING	BRASS	NICKEL	1								
	DESCRIPTION	MATERIAL	FINISH	QTY		DO NOT SCALE DRAWING						