

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
112649](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	07/31/05	—	INITIAL RELEASE
A	03/05/09	—	ADD "75ohms" TO PART DESCRIPTION

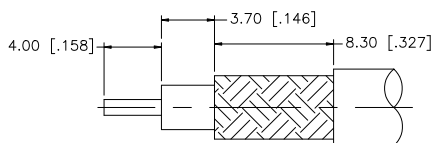

RECOMMENDED
CABLE STRIPPING DIM'S

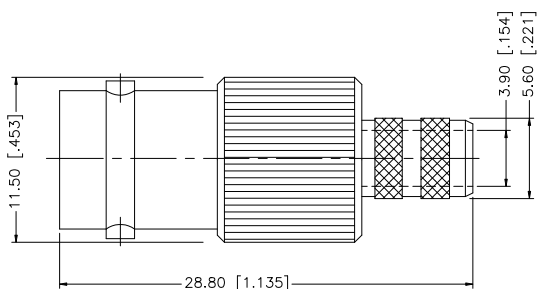

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex							
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN	GRS	03/05/09									
6						CHECKED								PART DESCRIPTION BNC CRIMP JACK, 75 Ohms			
5						ISSUED											
4	FERRULE	COPPER	NICKEL	1						PART NO. 112649							
3	CONTACT PIN	PHOS. BRONZE	GOLD	1													
2	INSULATOR	PTFE	NATURAL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	SHEET	1 OF 1									
1	HOUSING/BODY	BRASS	NICKEL	1													
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE	C:/112/112649.DWG		DWG. NO.	112649.DWG		REV. A	SIZE A	SCALE NA		