

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[122386](#)



For any questions, you can email us directly:

sales@integrated-circuit.com



RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
NC	11/14/00	XXXXXX	INITIAL RELEASE
A	11/08/04	XXXXXX	ADD COUPLING NUT/CHANGE PLATING TO NICKEL
B	09/16/13	2526	CHANGE CENTER CONTACT TO SOLDER, ADD ELECTRICAL/MECHANICAL NOTES, UPDATE FORMAT

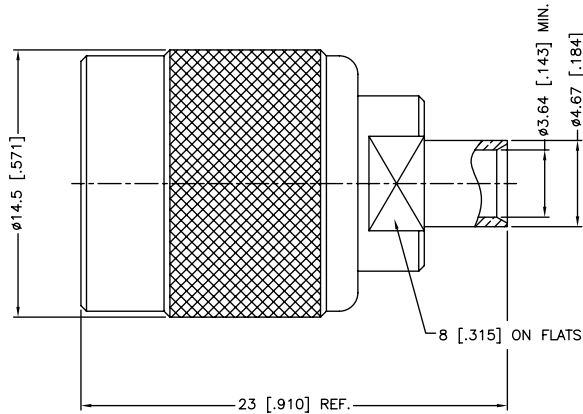

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-11 GHZ
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -40°C TO +85°C
7. CONTACT PIN TO SOLDER

QTY	DESCRIPTION	MATERIAL	FINISH
1	CONTACT PIN	BRASS	GOLD
1	WASHER	BRASS	NICKEL
1	RING	DELIN	NATURAL
1	RETAINER RING	BRASS	NICKEL
1	GASKET	RUBBER	RED
1	INSULATOR	PTFE	NATURAL
1	BODY	BRASS	GOLD
1	SHELL	BRASS	NICKEL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 6mm ± 0.10mm
6 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm
ANGLES ± 1°
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .236 ± 0.002"
.236 - 1.180 ± 0.004"
1.180 - 4.724 ± 0.012"
ANGLES ± 1°

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	09/16/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122386.DWG

Amphenol Connex

PART DESCRIPTION
TNC DIRECT SOLDER PLUG (FOR .141" SEMI-RIGID CABLE)
PART NO.
122386
DWG. NO.
122386.DWG
REV.
B
SIZE
A
SCALE
NA