

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
172139](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT

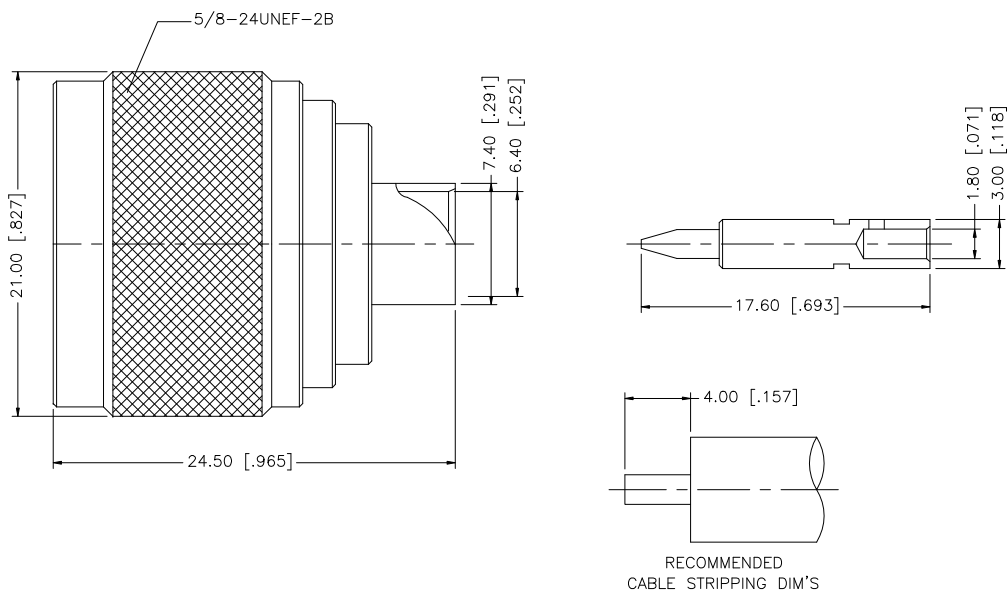

NOTE:
1. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"
OR SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex PART DESCRIPTION N DIRECT SOLDER PLUG (.250" SEMI-RIGID CABLE)					
8						DRAWN	G.R.S.	04/31/03							
7						CHECKED								PART NO.	
6						ISSUED								172139	
5						SHEET		1 OF 1		DWG. NO. 172139.DWG					
4	COUPLING NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm						REV. A		SIZE A	SCALE NA	
3	BODY	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		CAD FILE		C:/172/172139.DWG						
2	CONTACT PIN	BRASS	GOLD	1											
1	INSULATOR	TEFLON	NATURAL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING										