

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[132296](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
A	06/11/02	REVISE CONTACT PIN
B	08/16/07	REVISE CONTACT PIN, ADD INSULATOR



RECOMMENDED
CABLE STRIPPING DIM'S

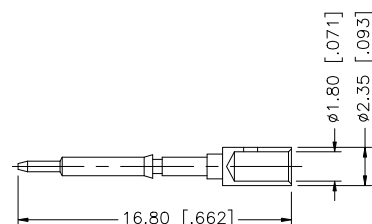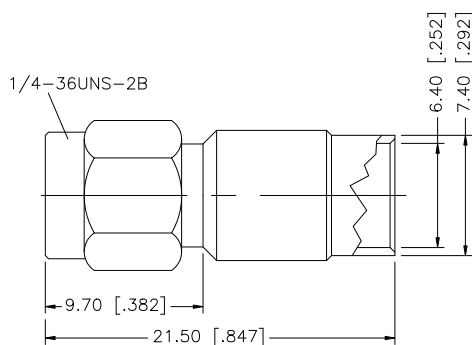

NOTE:
1) CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex											
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN	G.R.S.							08/16/07					
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	CHECKED								PART DESCRIPTION SMA SEMI RIGID PLUG (.250" SEMI RIGID CABLE)					
5						ISSUED													
4						SHEET	1 OF 1		PART NO. 132296										
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE									DWG. NO. 132296.DWG				
2	INSULATOR	TEFLON	NATURAL	1		C:/132/132296.DWG													
1	BODY	BRASS	GOLD	1					REV.	B	SIZE	A	SCALE	NA					
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING														