

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
132231](#)


For any questions, you can email us directly:

sales@integrated-circuit.com






REV.	DATE	ECR NO.	DESCRIPTION
NC	05/20/02	XXXXXX	INITIAL RELEASE
A	11/26/03	XXXXXX	UPDATE DRAWING FORMAT
B	11/22/13	2663	ADD SPACER, ADD TABLE A AND MODIFY STRIPPING DIMENSIONS, ADD ELECTRICAL/MECHANICAL NOTES, UPDATE DRAWING FORMAT



LMR-240



RG-8/X

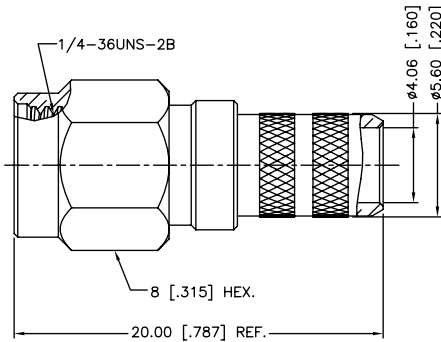

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0-12.4 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C
6. CRIMPED FERRULE
HEX. CRIMP SIZE .255"
7. CONTACT PIN TO SOLDER
8. SEE TABLE A FOR RECOMMENDED CABLE STRIPPING DIMENSIONS

TABLE A				
CABLE TYPE	DIMENSION A	DIMENSION B	DIMENSION C	SPACER REQUIRED
LMR-240	2 [.079]	3.25 [.128]	10.3 [.406]	YES
RG-8/X	2 [.079]	2.1 [.083]	10.3 [.406]	NO

8	FERRULE	BRASS	GOLD	1
7	SPACER	PTFE	NATURAL	1
6	CONTACT PIN	BRASS	GOLD	1
5	BODY	BRASS	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	RETAINER RING	SUS 304	NATURAL	1
2	GASKET	SILICONE RUBBER	RED	1
1	SHELL	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 6mm ± 0.10mm
6 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm
ANGLES ± 1°
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .236 ± 0.002"
.236 - 1.180 ± 0.004"
1.180 - 4.724 ± 0.012"
ANGLES ± 1°
DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	M.ZHANG	11/22/13
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/CONNEX/CONNEX.DWG	

Amphenol Connex

PART DESCRIPTION			
SMA CRIMP PLUG (FOR RG-8/X, LMR-240 CABLE)			
PART NO. 132231			
DWG. NO.	132231.DWG	REV.	B
SIZE	A	SCALE	NA