

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[132123RP](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	04/17/00	-	INITIAL RELEASE
A	07/21/05	-	UPDATE DRAWING FORMAT
B	04/28/08	-	REVISE BARREL O.D. TO 2.69 mm, FERRULE I.D. TO 3.2 mm
C	02/25/10	2027	THE FERRULE LENGTH WAS CHANGED TO 7 FROM 9.5.

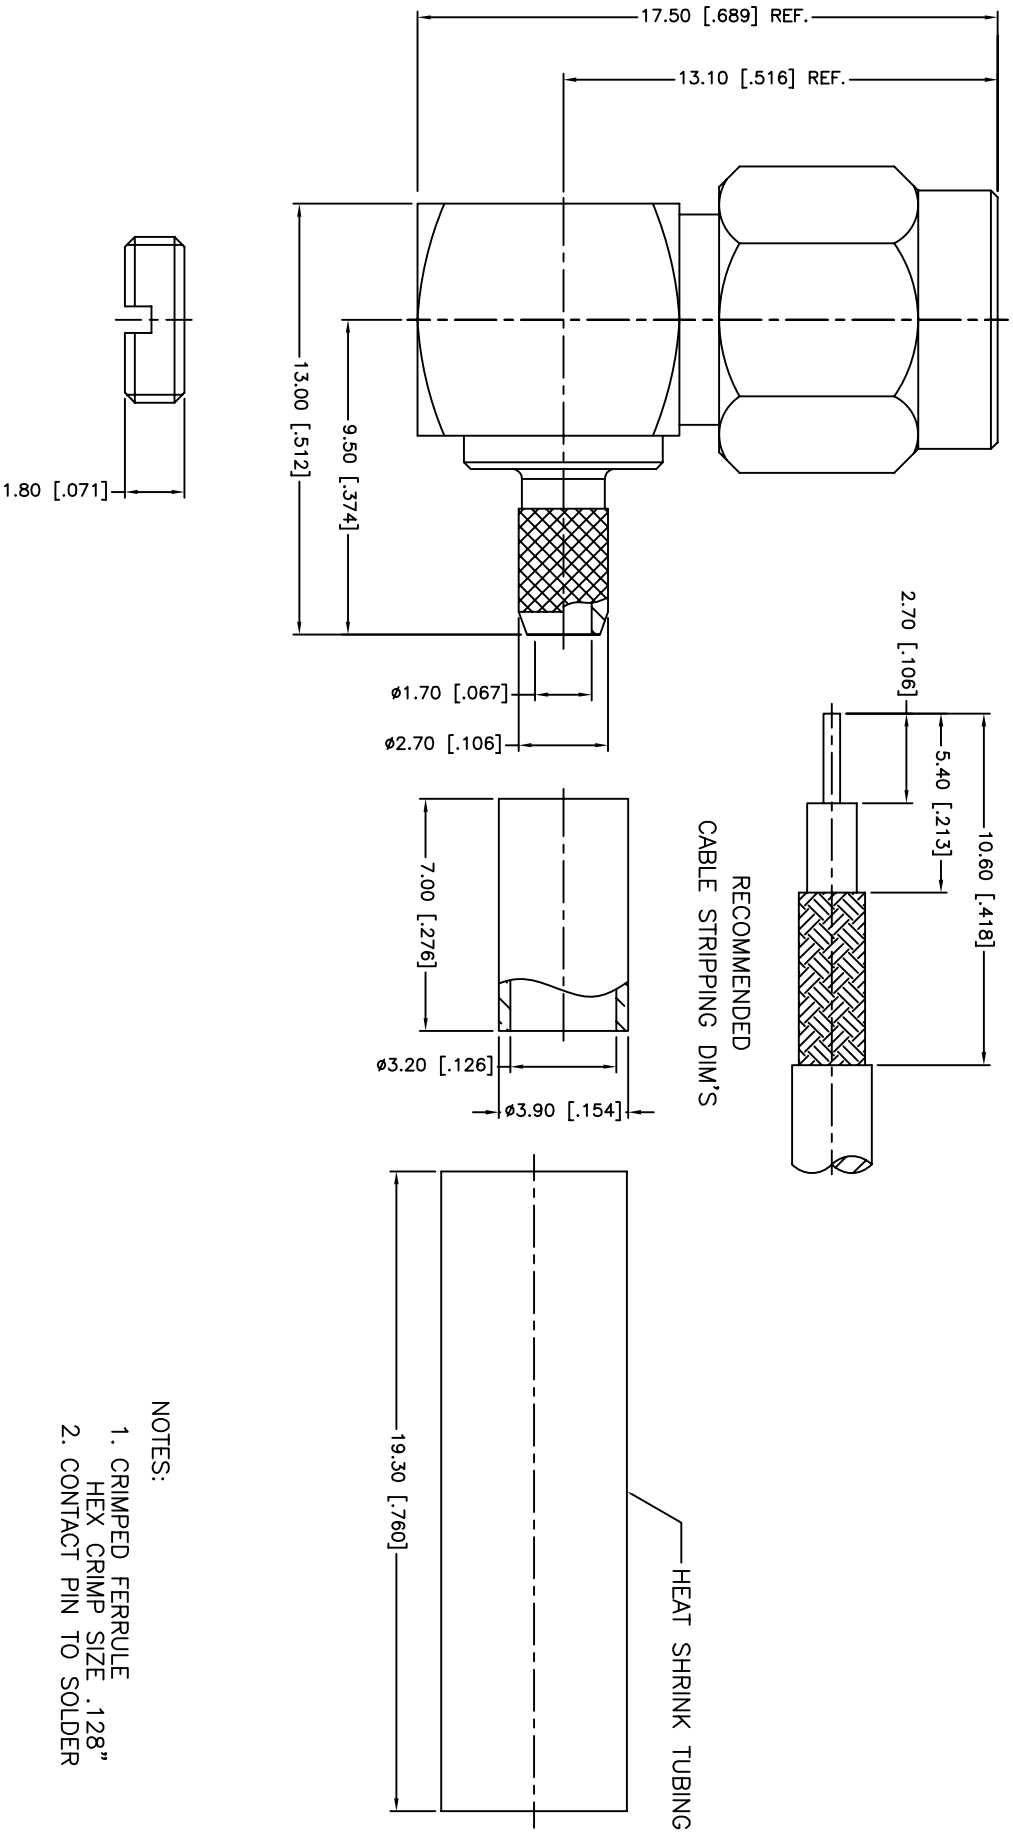

QTY	DESCRIPTION	MATERIAL	FINISH	QTY	APPROVALS	DATE	PART DESCRIPTION
1	HEAT SHRINK TUBING	BRASS	BLACK	1			Amphenol Connex SMA REVERSE POLARITY R/A CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
1	FERRULE	BRASS	GOLD	1			
1	COVER	BRASS	GOLD	1			
1	GASKET	SILICONE	RED	1			
1	RETAINER RING	SUS 304	NATURAL	1			
1	CONTACT PIN	BERYLLIUM COPPER	GOLD	1			
1	INSULATOR	PTFE	NATURAL	1			
1	HOUSING WITH BARREL	BRASS	GOLD	1			
1	SHELL	BRASS	GOLD	1			
	DESCRIPTION	MATERIAL	FINISH	QTY			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.40mm
 30 - 120mm ± 0.50mm
 UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .020 - .315 = ± 0.007"
 .315 - 1.180 = ± 0.015"
 1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

QAD FILE: C:/CONNEX/132123RP.DWG

DWG. NO. 132123RP.DWG REV. C SIZE A SCALE NA