

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[262102](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
B	04/31/03	UPDATE DRAWING FORMAT

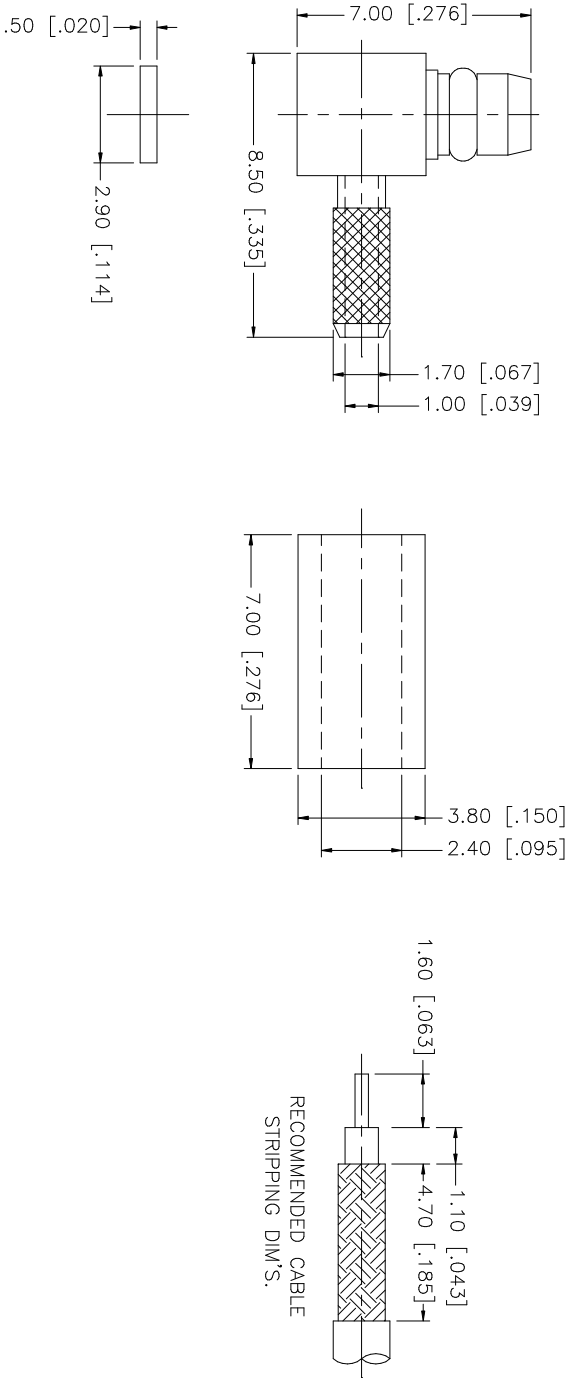

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex MMCX R/A CRIMP PLUG (FOR RG-178B/U, 196A/U) 262102
8						DRAWN	G.R.S.	
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:			
6					0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm			
5	FERRULE	COPPER	GOLD	1	CHECKED			
4	COVER	BRASS	GOLD	1	ISSUED			
3	CONTACT PIN	BRASS	GOLD	1	SHEET 1 OF 1			
2	INSULATOR	TEFLON	NATURAL	1	PART NO.			
1	BODY	BRASS	GOLD	1	DWG. NO. 262102			
	DESCRIPTION	MATERIAL	FINISH	QTY	DWG. NO. 262102.DWG			
					REV. B			
					SIZE A			
					SCALE NA			