

Excellent Integrated System Limited

Stocking Distributor








Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF
142192](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	ECR NO.	DESCRIPTION
NC	01/25/99	—	INITIAL RELEASE
A	07/20/05	—	UPDATE DRAWING FORMAT
B	05/08/07	—	REVISE BARREL AND FERRULE DIMENSIONS
C	05/25/08	—	REVISE NOTE 1 TO .151" HEX, REMOVE NOTE 2.
D	11/11/08	—	ADD NOTE 2 "CONTACT PIN TO SOLDER"

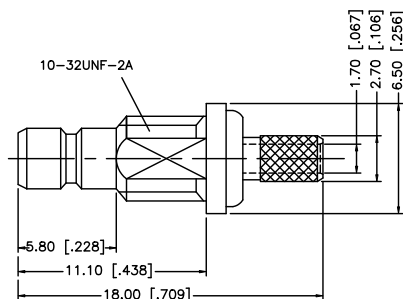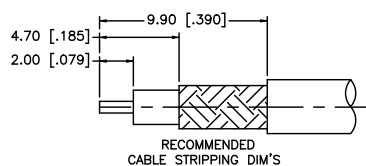

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.
3. MAX. PANEL THICKNESS = 2.4mm

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 ± ± 0.007" .315 – 1.180 ± ± 0.015" 1.180 – 4.724 ± ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
	HEAT SHRINK TUBE			1		DRAWN	G.R.S.					11/11/08
6	FERRULE	COPPER	GOLD	1		CHECKED			PART DESCRIPTION SMB BULKHEAD CRIMP JACK (FOR RG-316U/D CABLE)			
5	HEX NUT	BRASS	GOLD	1		ISSUED						
4	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 142192			
3	CONTACT PIN	BRASS	GOLD	1								
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 142192.DWG REV. D SIZE A SCALE NA			
1	BODY	BRASS	GOLD	1		CAD FILE	C:/142/142192.DWG					
	DESCRIPTION	MATERIAL	FINISH	QTY								