

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[E-Switch](#)
[MTH2UEENAGX](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

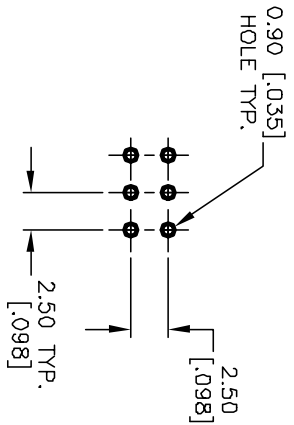



RECOMMENDED PCB LAYOUT

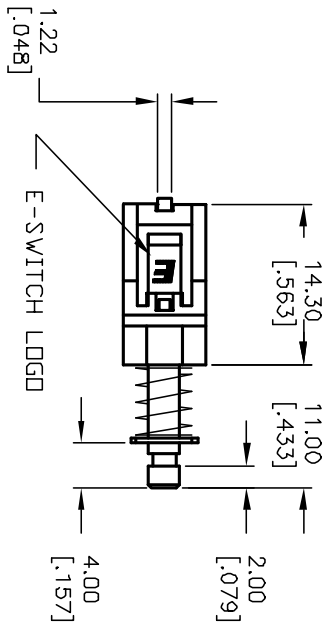

CIRCUIT: 2PDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.1A @30V DC
5. MATERIALS:
CONTACT/TERMINAL: SILVER PLATED COPPER ALLOY
HOUSING/PLUNGER: UL94HB
6. CONTACT RESISTANCE: 0.1 MAX.
7. TIMING: NON-SHORTING (BBM)
8. OPERATING FORCE: 170±100g
9. TRAVEL: 2mm (TRAVEL TO LOCK)
3mm (OVERALL)
10. ELECTRICAL LIFE: >10,000
11. DIELECTRIC STRENGTH: 250V RMS

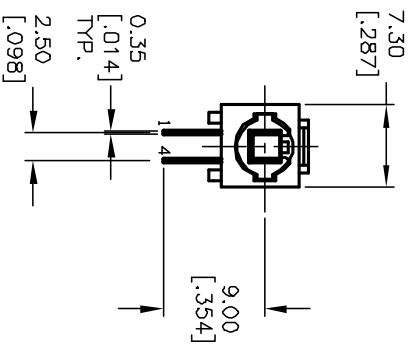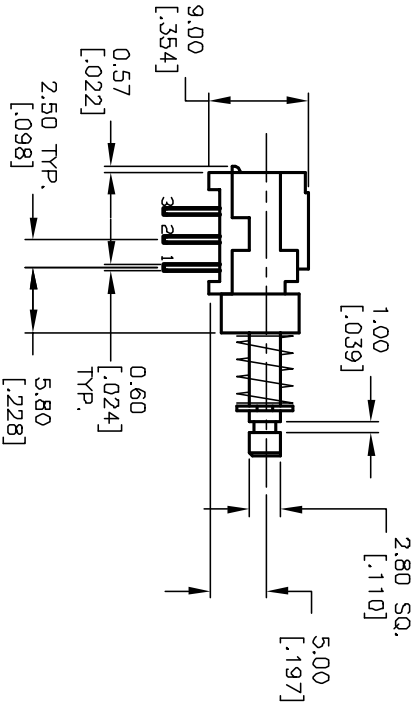

E-SWITCH®

REV.	ECN No.	REVISION AND REDRAWN	DATE	CHKD	SCALE	DATE	DR	DWG	REV
C	11999	REVISED AND REDRAWN	3/14/02	CJB	1.5:1	3/14/02	CJB	A960002	C
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED									

MTH2U EE N AGX (LATCHING)