

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity Alcoswitch Switches](#)
[1478604-6](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Spade/Solder Type Terminal




Product Facts

- n .187 [4.75] tab with solder hole
- n Use with .187 [4.75] FASTON receptacles or solder directly to terminal
- n Roller to increase travel and operating position as well as reduce operating force

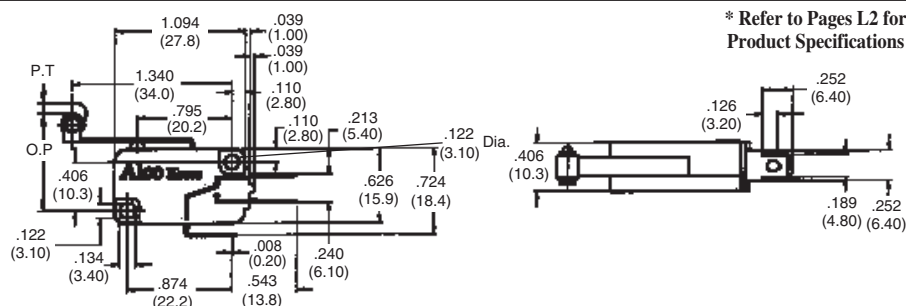


AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	60g	10g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478603-6
		120g	20g					1478604-6
		180g	30g					1478605-6
	SPNC	60g	10g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478609-6
		120g	20g					1478610-6
		180g	30g					1478611-6
5	SPNO	60g	10g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478615-6
		120g	20g					1478616-6
		180g	30g					1478617-6
0.1	SPDT	60g	10g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478667-6
	SPNC							1478668-6
	SPNO							1478669-6
0.1	SPDT	35g	6g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478670-6
	SPNC							1478671-6
	SPNO							1478672-6

Spade Type Terminal



Product Facts

- n .250 [6.35] tab for use with .250 [6.35] FASTON receptacles
- n Roller to increase travel and operating position as well as reduce operating force

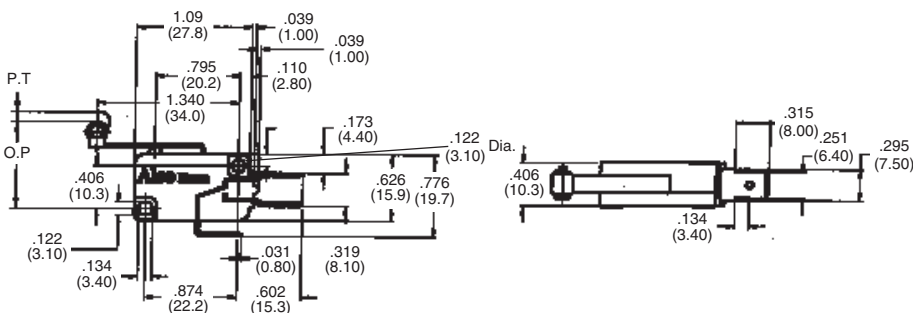

AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	60g	10g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478606-6
		120g	20g					1478607-6
		180g	30g					1478608-6
	SPNC	60g	10g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478612-6
		120g	20g					1478613-6
		180g	30g					1478614-6
0.1	SPNO	60g	10g	4.0 m/m [.157]	20.7 ±1.6 [.815±.063]	1.3 m/m [.051]	1.2 m/m [.047]	1478618-6
		120g	20g					1478619-6
		180g	30g					1478620-6

Spade/Solder Type Terminal





Product Facts

- n .187 [4.75] tab with solder hole
- n Use .187 [4.75] FASTON receptacles or solder directly to terminal
- n Simulator lever for operating position between a roller and a lever

Miniature Simulator Lever

* Refer to Pages L2 for Product Specifications

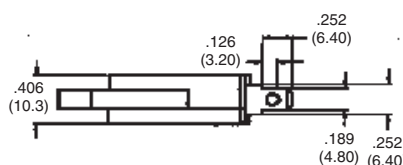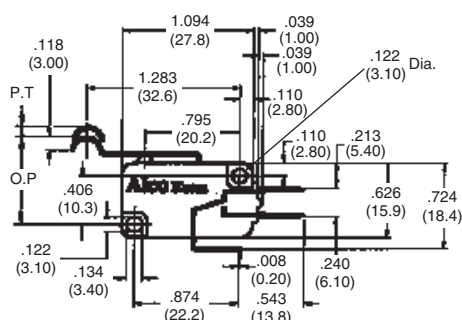



AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	60g	10g	4.0 m/m [.157]	18.6 ±1.5 [.732±.059]	1.3 m/m [.051]	1.2 m/m [.047]	1478603-7
		120g	20g					1478604-7
		180g	30g					1478605-7
	SPNC	60g	10g	4.0 m/m [.157]	18.6 ±1.5 [.732±.059]	1.3 m/m [.051]	1.2 m/m [.047]	1478609-7
		120g	20g					1478610-7
		180g	30g					1478611-7
5	SPNO	60g	10g	4.0 m/m [.157]	18.6 ±1.5 [.732±.059]	1.3 m/m [.051]	1.2 m/m [.047]	1478615-7
		120g	20g					1478616-7
		180g	30g					1478617-7
0.1	SPDT	60g	10g	4.0 m/m [.157]	18.6 ±1.5 [.732±.059]	1.3 m/m [.051]	1.2 m/m [.047]	1478667-7
	SPNC							1478668-7
	SPNO							1478669-7
	SPDT							1478670-7
	SPNC	35g	6g					1478671-7
								1478672-7

Spade Type Terminal



Product Facts

- n .250 [6.35] tab for use with .250 [6.35] FASTON receptacles
- n Simulator lever for operating position between a roller and a lever

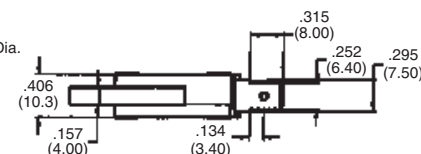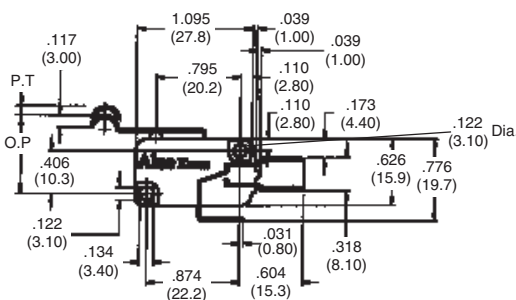

AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	60g	10g	4.0 m/m [.157]	18.6 ±1.5 [.732±.059]	1.3 m/m [.051]	1.2 m/m [.047]	1478606-7
		120g	20g					1478607-7
		180g	30g					1478608-7
	SPNC	60g	10g	4.0 m/m [.157]	18.6 ±1.5 [.732±.059]	1.3 m/m [.051]	1.2 m/m [.047]	1478612-7
		120g	20g					1478613-7
		180g	30g					1478614-7
	SPNO	60g	10g	4.0 m/m [.157]	18.6 ±1.5 [.732±.059]	1.3 m/m [.051]	1.2 m/m [.047]	1478618-7
		120g	20g					1478619-7
		180g	30g					1478620-7