

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[5501MWHTX](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 1 OF 1

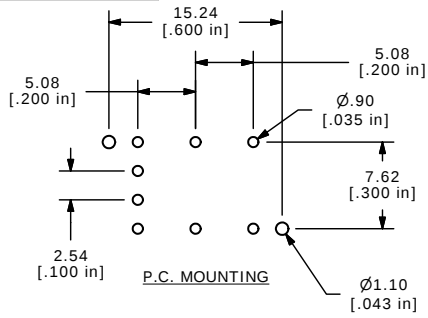

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF. ONLY.
 - ▲ 4. RATING: 30mA @ 12VDC
 5. CONTACT RESISTANCE: 50mΩ MAX
 6. INSULATION RESISTANCE: 50MΩ @ 500VDC
 7. DIELECTRIC STRENGTH: 1,000 VAC @ 50/60 Hz FOR 1 min.
 8. OPERATING FORCE: 150±50gf
 9. TRAVEL: 1.5±0.3
 10. MECHANICAL LIFE: 500,000 CYCLES
 11. ELECTRICAL LIFE: 30,000 CYCLES
 12. OPERATING TEMPERATURE: -25°C TO 65°C
 13. ▲ DENOTES CRITICAL PARAMETER

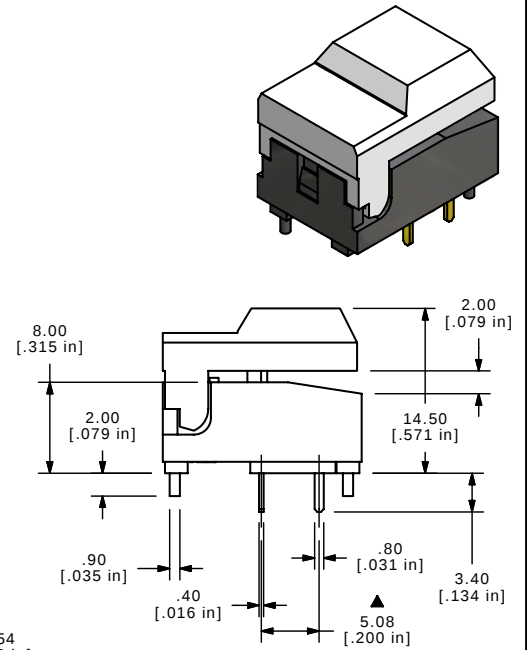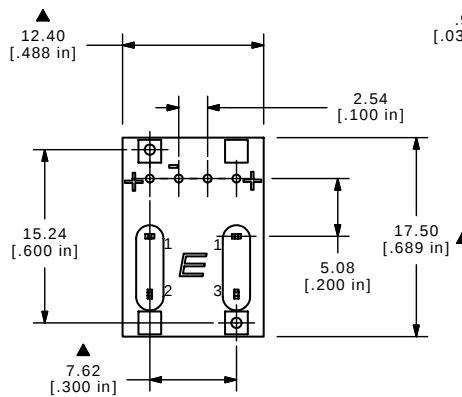

E-SWITCH®

TITLE 5501MWHTX

A	15607	RELEASED FOR PRODUCTION	12/15/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1

DATE 12/15/2005

DR PH

DWG XR0244P

REV A