

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Conec](#)
[132A15019X](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

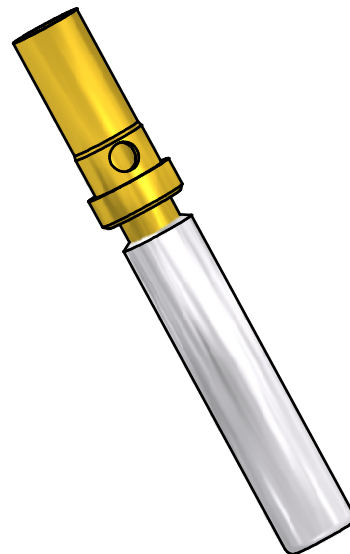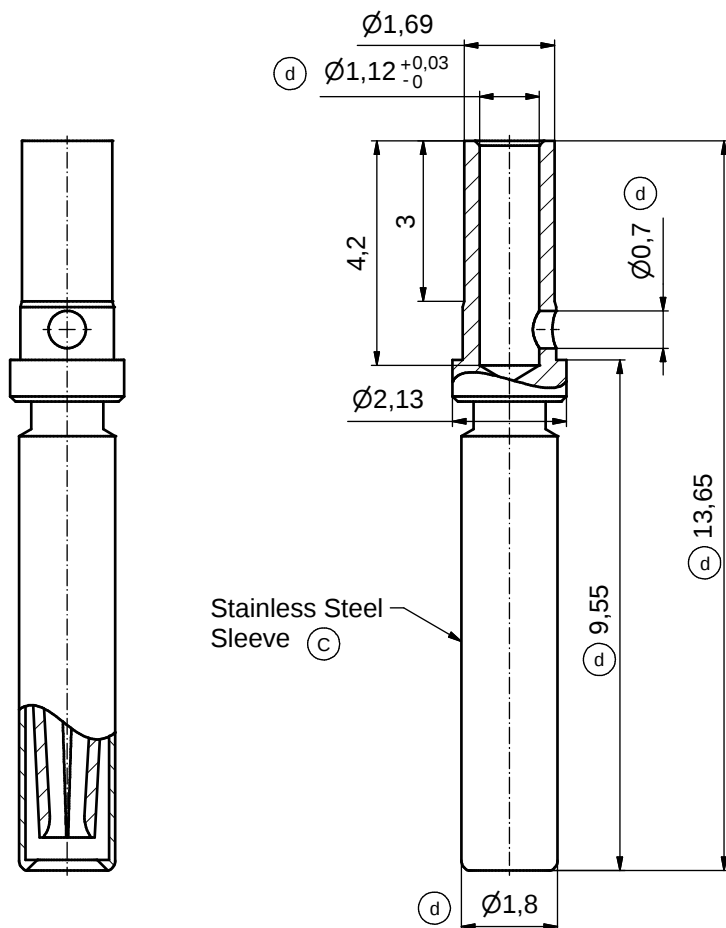

(b) STRIPPING DIMENSIONS

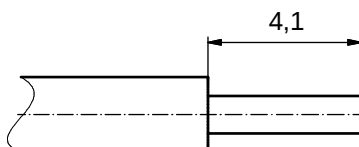

Plating	Part no.	Part no. North America
GOLD FLASH over NICKEL	132A15019X	162A18709X
min. 30µin HARD GOLD over min. 50µin NICKEL	132C15019X	162C18709X
min. 50µin HARD GOLD over min. 50µin NICKEL	132J15019X	162J18709X

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
3. CRIMPING: USE CRIMP TOOL 360X10329X WITH TOOL INSERT 360X20039X
SELECTOR SETTINGS: 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

THIS DOCUMENT IS THE PROPERTY OF CONEC GMBH. IT MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE USED ON TO A THIRD PARTY WITHOUT PERMISSION. ALL RIGHTS RESERVED.

ALTER CAD DRAWING BY HAND

finish: SEE NOTES				tolerance ISO 2768-m		 dim. in mm
					date	name
				drawn	30.01.02	Parei
2 x e	Ä 4145	26.10.11	Lehm.	appd.	30.01.02	Mickenbecker
6 x d	Ä 2532	12.07.06	HS	norm		
2 x c	Ä 2193	21.03.05	Lehm.	d-old		
2 x b	Ä 2177	02.03.05	Lehm.			

scale:	10:1
material:	SEE NOTES
title:	
SIGNAL CRIMP CONTACT	
SOCKET CONTACT	
Wire Size 20-24	
dwg no:	Inventor 10 (d)
DIN-A3	