

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[SS-39100-008](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


DATE	REV.	ECN	APP'D BY
9-22-05	B1	7264	TRM
11-1-05	B2	7365	TRM
1-23-06	B3	7441	JM
5-30-12	B4	9480	SMN
2-17-15	B5	10258	ADB

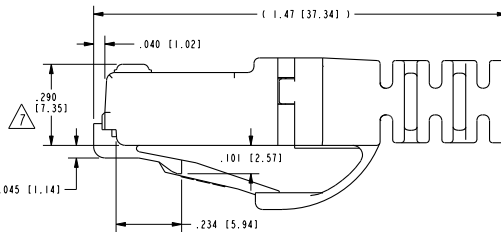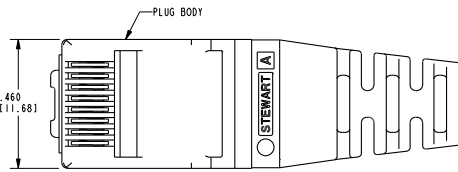


NOTES:

1. PLUG KIT CONSISTS OF:
PRE-INSERTED PLUG BODY
LOAD BAR
STRAIN RELIEF
2. MATERIALS:
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
LOAD BAR: CLEAR POLYCARBONATE, UL 94-V0
STRAIN RELIEF: CLEAR POLYCARBONATE, UL 94-V0
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING
3. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 (0.94) TO .042 (1.07) OUTSIDE DIAMETER OF INSULATION.
4. STRAIN RELIEF IS FOR CABLES WITH OUTSIDE DIAMETERS OF .220 (5.59) TO .230 (5.84).
5. PLUG SPECIFICATION: FOR CATEGORY 6 APPLICATIONS.
6. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
7. TERMINATED PLUG HEIGHT: .237 (6.02) ± .005 (0.13).
8. FOR PRODUCT SPECIFICATION SEE PRO26-01

BAG OF 25	50 MICRO-INCHES [1.27um]	SS-39100-017
BULK	50 MICRO-INCHES [1.27um]	SS-39100-008
PACKAGE	CONTACT PLATING IN MATING AREA	PART NUMBER




LOAD BAR



STRAIN RELIEF

RoHS



DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES (METRIC)
UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ± .005 (0.13)
ANGLES ARE ± 1°

SHEET NO. 1 OF 1



stewart
CONNECTOR
a bel group

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

TITLE: 8 POSITION/8 CONDUCTOR CAT6 UNSHIELDED PLUG
LOAD BAR & STRAIN ASS'Y (ANTI-SNAG VERSION)

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE
CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR
AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT
PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. THIS PRODUCT
MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
5606441 6402559 6400555 4524128
7753717 8033863
OTHER PATENTS MAY BE PENDING.

DRN BY: TRM DATE 1-15-04
APP'D BY: RGC DATE 2-13-04
DWG. NO. CT390027 REV. B5