

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)

[M22100B1](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



M22100

4x4 CROSSPOINT SWITCH WITH CONTROL MEMORY

- LOW ON RESISTANCE - 75Ω Typ.
at $V_{DD} = 12V$
- "BUILT IN" CONTROL LATCHES
- LARGE ANALOG SIGNAL
CAPABILITY $\pm V_{DD}/2$
- TRANSMITS SIGNALS UP TO 10 MHz
- MATCHED SWITCH CHARACTERISTICS
 $\Delta_{RON} = 18\Omega$ Typ. at $V_{DD} - V_{SS} = 12V$
- HIGH LINEARITY : - 0.5% DISTORTION Typ.
at $f = 1KHz$, $V_{IN} = 5 V_{pp}$
 $V_{DD} - V_{SS} = 10V$, $R_L = 10K\Omega$
- STANDARD COS/MOS NOISE IMMUNITY
- 100% TESTED FOR QUIESCENT CURRENT

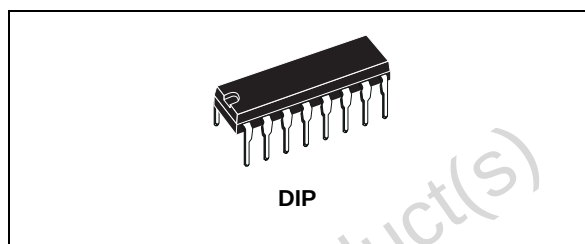

ORDER CODES

PACKAGE	TUBE	T & R
DIP	M22100B1	


DESCRIPTION

The M22100 combines a 4 x 4 array of crosspoints (transmission gates) with a 4 line to 16 line decoder and 16 latch circuits. Any one of the sixteen transmission gates (crosspoints) can be selected by applying the appropriate four line address. The selected transmission gate can be turned on or off by applying a logical one or zero, respectively, to the data input and strobing the

strobe input to a logical one. Any number of the transmission gates can be ON simultaneously. When the required operating power is applied to the 22100, the states of the 16 switches are indeterminate.


Therefore, all switches must be turned off by putting the strobe high and data in low, and the addressing all switches in succession.

PIN CONNECTION

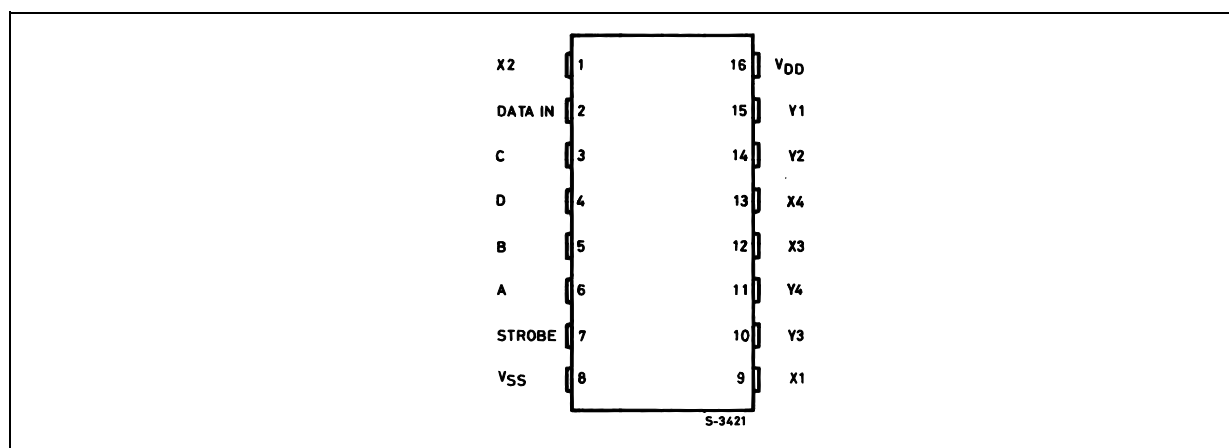

M22100B


INPUT EQUIVALENT CIRCUIT

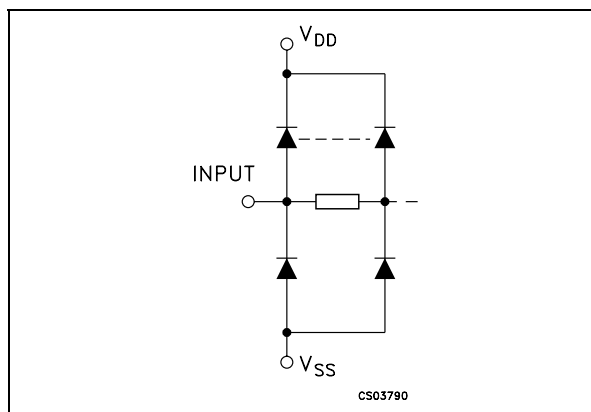

PIN DESCRIPTION

PIN No	SYMBOL	NAME AND FUNCTION
9, 1, 12, 13	X1 to X4	Select X
15, 14, 10, 11	Y1 to Y4	Select Y
6, 5, 3, 4	A, B, C, D	Address Input
2	DI	Data In
7	ST	Strobe In
8	V _{SS}	Negative Supply Voltage
16	V _{DD}	Positive Supply Voltage

FUNCTIONAL DIAGRAM

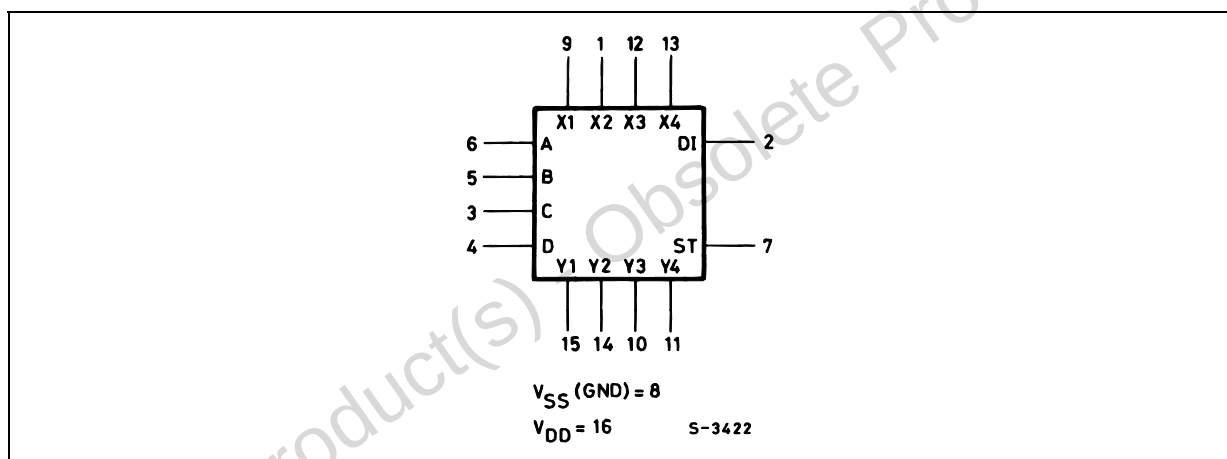


TRUTH TABLE

ADDRESS				SELECT		ADDRESS				SELECT	
A	B	C	D			A	B	C	D		
L	L	L	L	X1	Y1	L	L	L	H	X1	Y3
H	L	L	L	X2	Y1	H	L	L	H	X2	Y3
L	H	L	L	X3	Y1	L	H	L	H	X3	Y3
H	H	L	L	X4	Y1	H	H	L	H	X4	Y3
L	L	H	L	X1	Y2	L	L	H	H	X1	Y4
H	L	H	L	X2	Y2	H	L	H	H	X2	Y4
L	H	H	L	X3	Y2	L	H	H	H	X3	Y4
H	H	H	L	X4	Y2	H	H	H	H	X4	Y4

M22100B

LOGIC DIAGRAM

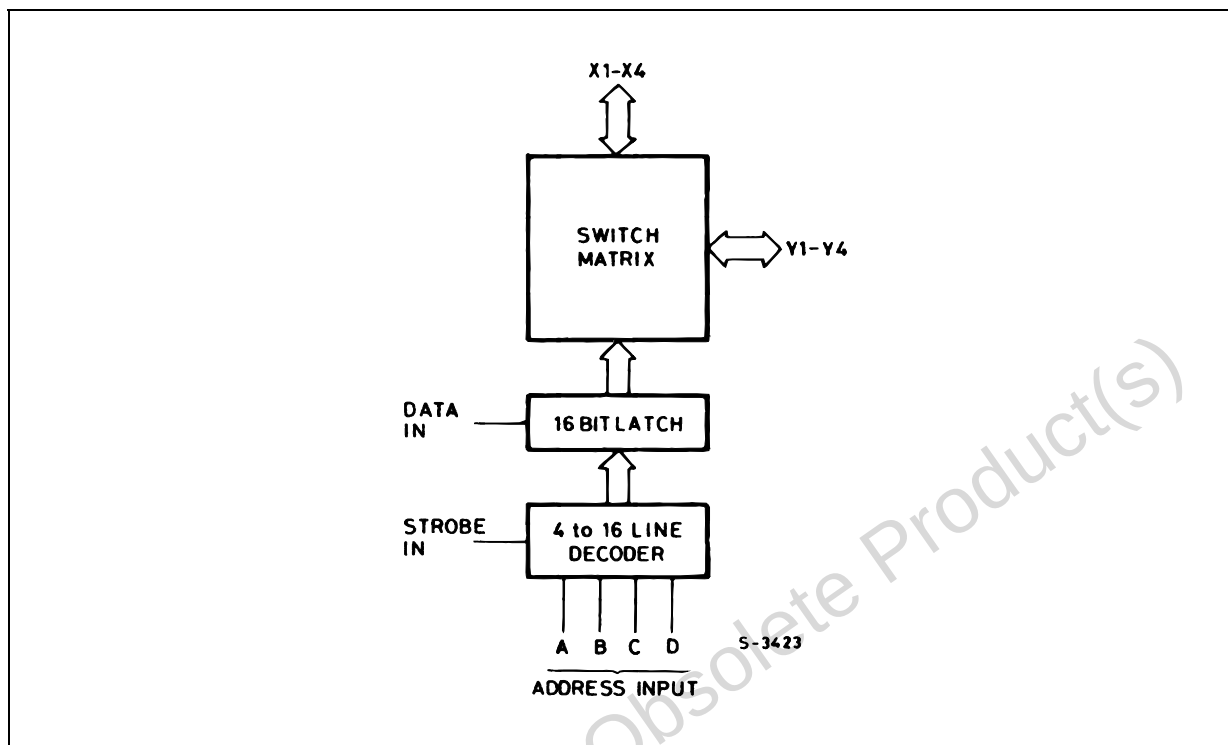

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{DD}	Supply Voltage	-0.5 to +22	V
V_I	DC Input Voltage	-0.5 to $V_{DD} + 0.5$	V
I_I	DC Input Current	± 10	mA
P_D	Power Dissipation per Package	200	mW
	Power Dissipation per Output Transistor	100	mW
T_{op}	Operating Temperature	-55 to +125	°C
T_{stg}	Storage Temperature	-65 to +150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

All voltage values are referred to V_{SS} pin voltage.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V_{DD}	Supply Voltage	3 to 20	V
V_I	Input Voltage	0 to V_{DD}	V
T_{op}	Operating Temperature	-55 to 125	°C

M22100B

DC SPECIFICATIONS

Symbol	Parameter		Test Condition			Value						Unit	
				V _I (V)	V _{DD} (V)	T _A = 25°C			-40 to 85°C		-55 to 125°C		
						Min.	Typ.	Max.	Min.	Max.	Min.		Max.
I _L	Quiescent Supply Current	F1			5		0.04	5		150		150	μA
					10		0.04	10		300		300	
					15		0.04	20		600		600	
					20		0.08	100		3000		3000	
		B1			5		0.04	20		150		150	
					10		0.04	40		300		300	
	15				0.04	80		600		600			
R _{ON}	Resistance	F1	Any Switch		5		225	1250		1625		1625	Ω
					10		85	180		230		230	
					12		75	135		175		175	
					15		65	95		125		125	
		B1	V _{IS} = 0 to V _{DD}		5		225	1250		1440		1440	
					10		85	180		205		205	
					12		75	135		155		155	
					15		65	95		110		110	
Δ _{ON}	Resistance Δ _{RON} (between any two channels)				5		35					Ω	
					10		20						
					12		18						
					15		15						
	OFF Channel Leakage Current	F1	All Switch OFF	0/18	18		±10 ⁻³	± 0.1*		±1		±1	μA
		B1		0/15	15		±10 ⁻³	± 0.3		±1		±1	
CONTROL													
V _{IL}	Low Level Input Voltage				5			1.5		1.5		1.5	V
					10			3		3		3	
					15			4		4		4	
V _{IH}	High Level Input Voltage				5	3.5			3.5		3.5		V
					10	7			7		7		
					15	11			11		11		
I _I	Input Current	F1	Any Control Input	0/18	18		±10 ⁻⁵	±0.1*		±1		±1	μA
		B1		0/15	15		±10 ⁻⁵	±0.3		±1		±1	
C _I	Input Capacitance	Any Input					5	7.5					pF

The Noise Margin for both "1" and "0" level is: 1V min. with $V_{DD}=5\text{V}$, 2V min. with $V_{DD}=10\text{V}$, 2.5V min. with $V_{DD}=15\text{V}$

* : Determined by minimum feasible leakage measurement for automating testing

M22100B

DYNAMIC ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^{\circ}\text{C}$, $C_L = 50\text{pF}$, $R_L = 200\text{K}\Omega$, $t_r = t_f = 20\text{ ns}$)

Symbol	Parameter	Test Condition					Value (*)			Unit
			f _i (KHz)	R _L (KΩ)	V _{IS} ⁽¹⁾ (V)	V _{DD} (V)	Min.	Typ.	Max.	
CROSSPOINT										
t _{PHL} t _{PLH}	Propagation Delay Time (Address or Strobe Inputs to Output)			10	5 10 15	5 10 15		30 15 10	60 30 20	ns
	Frequency Response (Any Switch ON)		1	1	5	10		40		MHz
	Sine Wave Distortion		1	1	5	10		0.5		%
	Feedthrough (All Switches OFF)		1.6	1	5	10		80		dB
	Frequency for Signal Crosstalk Attenuation of 40 dB			1	10	10		1.5		MHz
	Frequency for Signal Crosstalk Attenuation of 110 dB			1	10	10		0.1		KHz
C	Capacitance Xn to Ground, Yn to Ground, Feedthrough					5 / 15		18 30 0.4		pF
CONTROLS										
t _{PHZ}	Propagation Delay Time Strobe to Output (Switch Turn-ON to High Level)	R _L = 1KΩ C _L = 50pF t _r , t _f = 20ns	See Figure 1			5		500	1000	ns
						10		230	460	
						15		145	290	
t _{PZH}	Propagation Delay Time Data-In to Output (Switch Turn-ON to High Level)		See Figure 2			5		500	1000	ns
						10		220	440	
						15		135	270	
t _{PZH}	Propagation Delay Time Address to Output (Switch Turn-ON to High Level)		See Figure 3			5		480	960	ns
						10		225	450	
						15		150	300	
t _{PHZ}	Propagation Delay Time Strobe to Output (Switch Turn-OFF)		See Figure 1			5		450	900	ns
						10		200	400	
						15		165	330	
t _{PZL}	Propagation Delay Time Data-In to Output (Switch Turn-ON to Low Level)		See Figure 2			5		500	1000	ns
						10		220	440	
						15		135	270	
t _{PHZ}	Propagation Delay Time Address to Output (Switch Turn-OFF)		See Figure 3			5		425	850	ns
						10		190	380	
						15		145	290	
t _{setup}	Setup Time Data-In to Strobe, Address					5		200	400	ns
						10		80	160	
						15		50	100	


M22100B

Symbol	Parameter	Test Condition					Value (*)			Unit
			f _I (KHz)	R _L (KΩ)	V _{IS} ⁽¹⁾ (V)	V _{DD} (V)	Min.	Typ.	Max.	
CONTROLS										
t _{hold}	Data Input Disable Setup Time	R _L = 1KΩ C _L = 50pF t _r , t _f = 20ns				5		180		ns
						10		110		
						15		35		
f _φ	Switching Frequency					5	0.6	1.2		MHz
						10	1.6	3.2		
						15	2.5	5		
t _W	Strobe Pulse Width					5		300	600	ns
						10		120	240	
						15		90	180	
	Control Crosstalk Data-In, Address, or Strobe to Output			10	10	10		75		mV peak

(*) Typical temperature coefficient for all V_{DD} value is 0.3 %/°C.


(1) Peak to Peak voltage symmetrical about $V_{DD}/2$

WAVEFORM 1 : PROPAGATION DELAY TIMES (f=1MHz; 50% duty cycle)

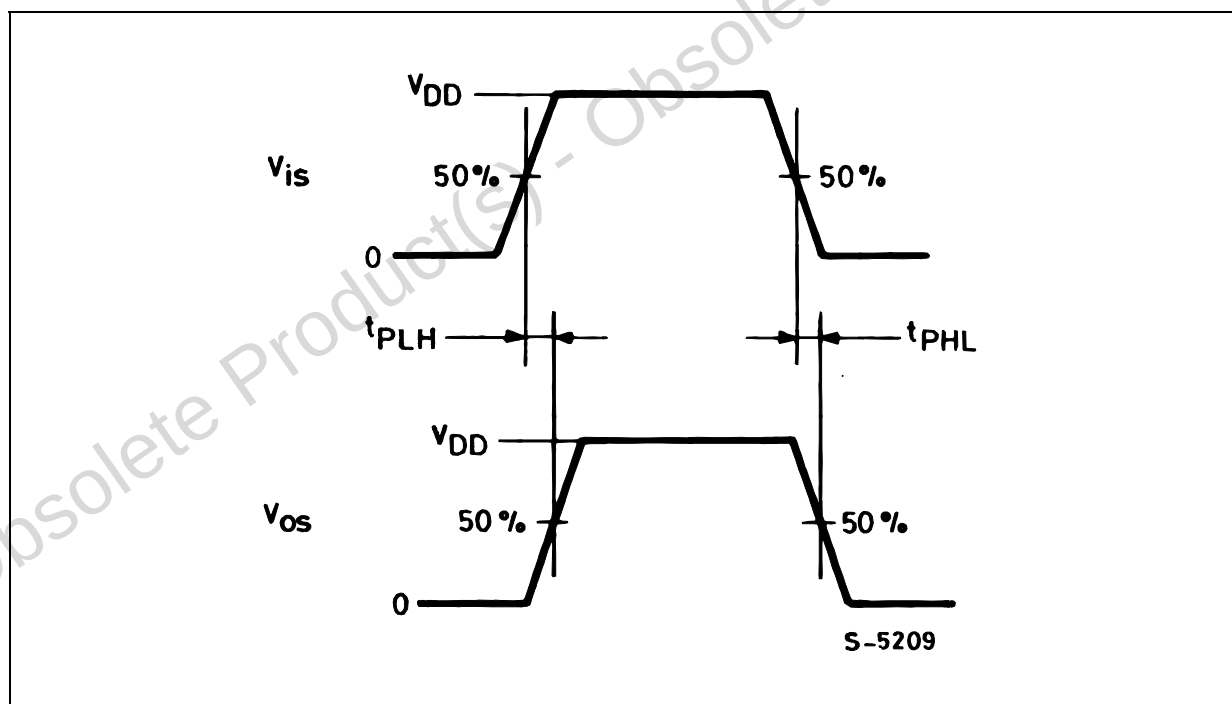


M22100B

WAVEFORM 2 : Propagation Delay Time (strobe to signal output, switch turn-ON or turn OFF)
(f=1MHz; 50% duty cycle)

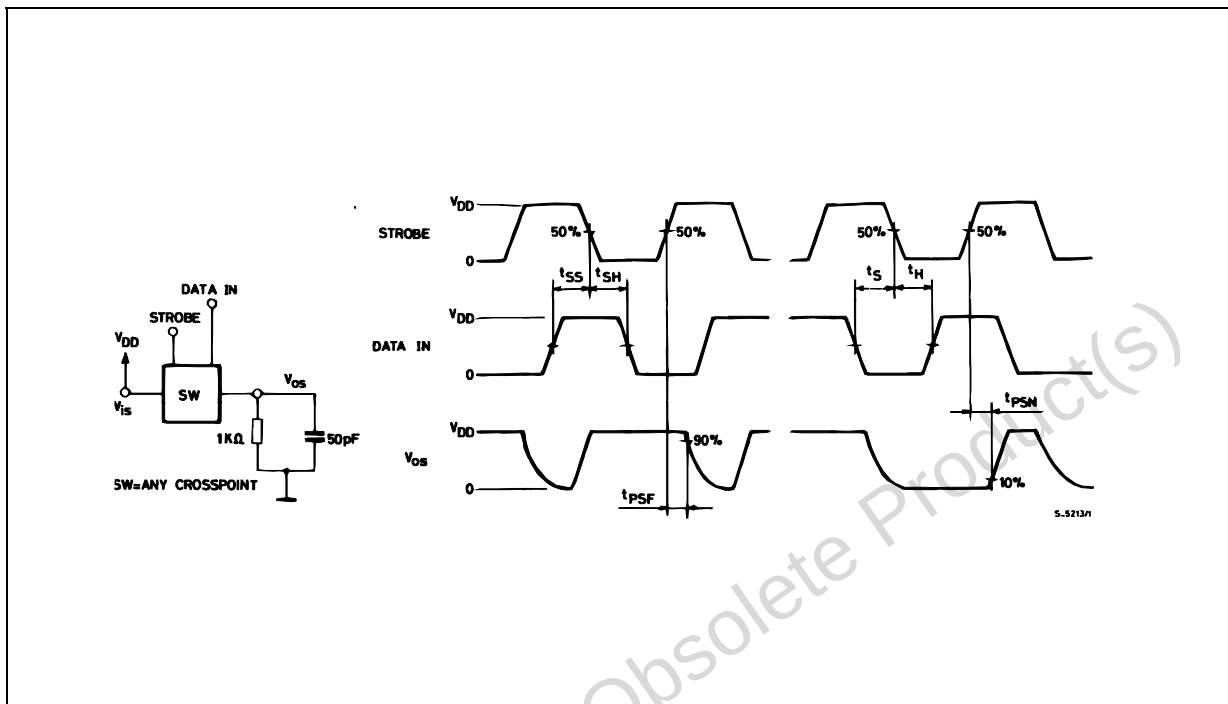


WAVEFORM 3 : PROPAGATION DELAY TIME (DATA IN TO SIGNAL OUTPUT, SWITCH TURN ON TO HIGH OR LOW LEVEL) (f=1MHz; 50% duty cycle)

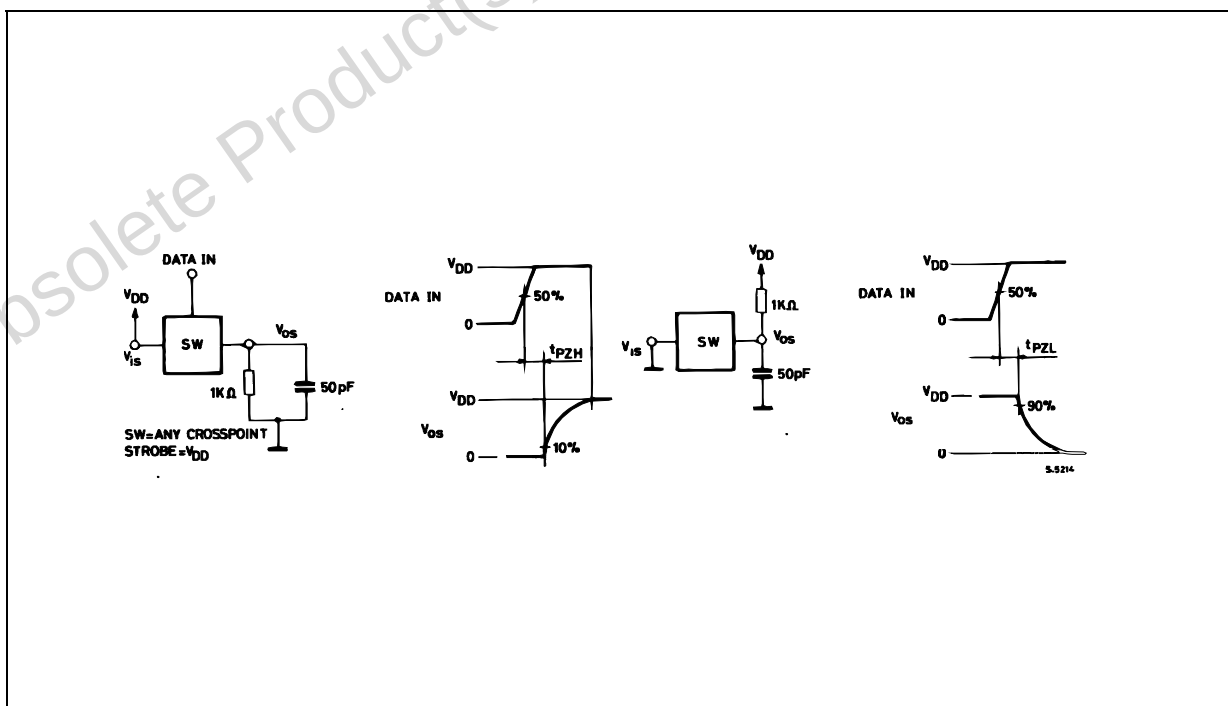

M22100B


WAVEFORM 4 : PROPAGATION DELAY TIME (ADDRESS TO SIGNAL OUTPUT SWITCH TURN ON OR TURN OFF) (f=1MHz; 50% duty cycle)

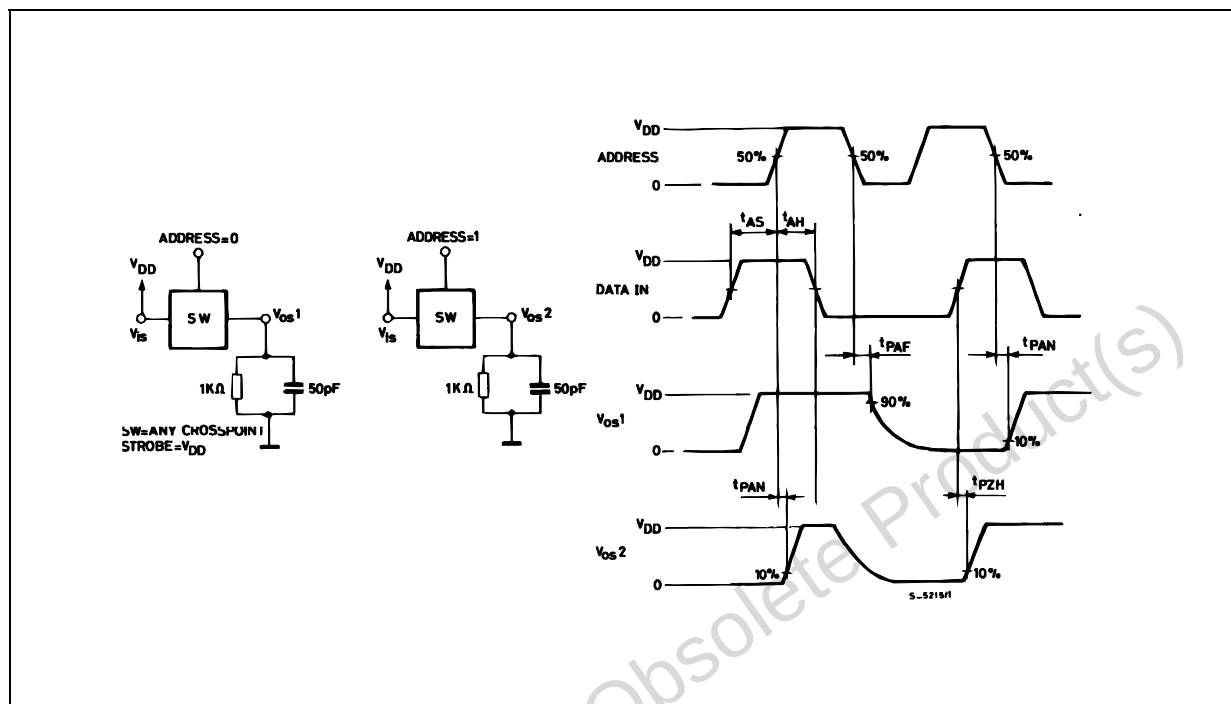

M22100B

Plastic DIP-16 (0.25) MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
a1	0.51			0.020		
B	0.77		1.65	0.030		0.065
b		0.5			0.020	
b1		0.25			0.010	
D			20			0.787
E		8.5			0.335	
e		2.54			0.100	
e3		17.78			0.700	
F			7.1			0.280
I			5.1			0.201
L		3.3			0.130	
Z			1.27			0.050

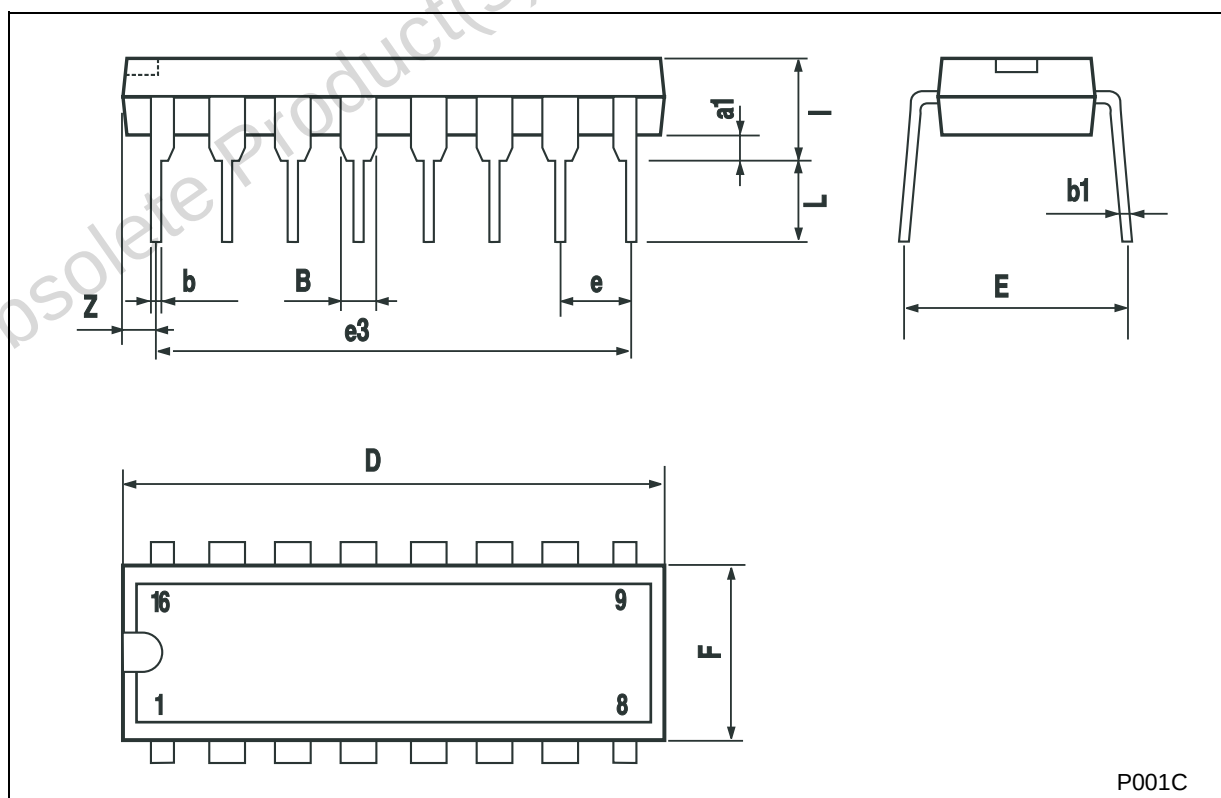

M22100B

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>