

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)

[STPR120A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



STPR120A

HIGH EFFICIENCY FAST RECOVERY DIODE

Table 1: Main Product Characteristics

$I_{F(AV)}$	1 A
V_{RRM}	200 V
$T_j(max)$	150°C
$V_F(max)$	0.74 V
$t_{rr}(max)$	35 ns

FEATURES AND BENEFITS

- Very low switching losses
- Low forward voltage drop
- Fast rectifier Epitaxial diode
- Surface mount package

DESCRIPTION

Single chip rectifier suited to Switched Mode Power Supplies and high frequency DC/DC converters.

Packaged in SMA, this surface mount device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

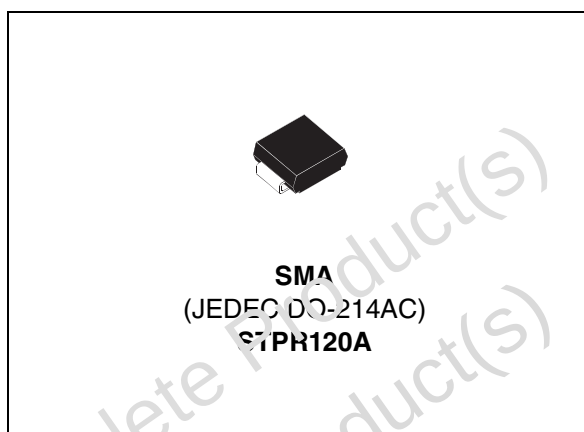


Table 2: Order Code

Part Number	Marking
STPR120A	R12

Table 3: Absolute Ratings (limiting values)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	200	V
$I_{F(RMS)}$	RMS forward current	8	A
$I_{F(AV)}$	Average forward current	1	A
I_{FSM}	Surge non repetitive forward current	30	A
T_{stg}	Storage temperature range	-65 to + 150	°C
T_j	Maximum operating junction temperature	150	°C

STPR120A

Table 4: Thermal Resistance

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction to lead	30	°C/W

Table 5: Static Electrical Characteristics

Symbol	Parameter	Tests conditions		Min.	Typ	Max.	Unit
I_R *	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			3	μA
		$T_j = 125^\circ\text{C}$			180	400	
V_F **	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$			0.94	V
		$T_j = 150^\circ\text{C}$	$I_F = 1\text{A}$		0.69	0.74	

Pulse test: * $t_p = 5\text{ ms}$, $\delta < 2\%$

** $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation: $P = 0.62 \times I_{F(AV)} + 0.12 I_F^2(\text{RMS})$

Table 6: Recovery Characteristics

Symbol	Parameter	Test conditions		Min.	Typ	Max.	Unit
t_{rr}	Reverse recovery time	$T_j = 25^\circ\text{C}$	$I_F = 0.5\text{A}$ $I_{rr} = 0.25\text{A}$ $I_{r1} = 1\text{A}$			25	ns
			$I_F = 1\text{A}$ $dI_F/dt = 50\text{ A}/\mu\text{s}$ $V_R = V_{RRM}$		25	35	
t_{fr}	Forward recovery time	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$ $dI_F/dt = 100\text{ A}/\mu\text{s}$ Measured at 1V			25	ns
V_{FP}	Forward recovery voltage		$I_F = 1\text{A}$ $dI_F/dt = 100\text{ A}/\mu\text{s}$			5	V

STPR120A

Figure 1: Average forward power dissipation versus average forward current

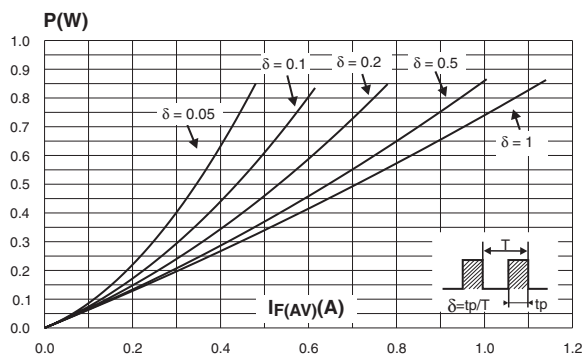


Figure 2: Peak current versus form factor

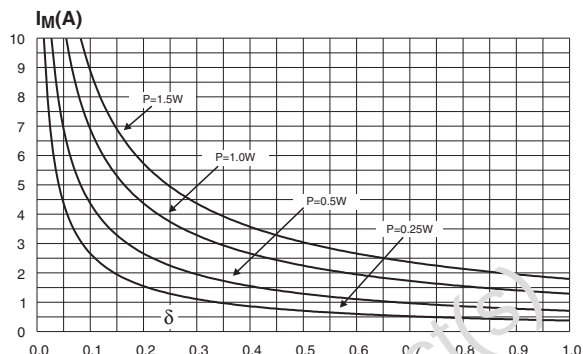


Figure 3: Average forward current versus ambient temperature ($\delta = 0.5$)

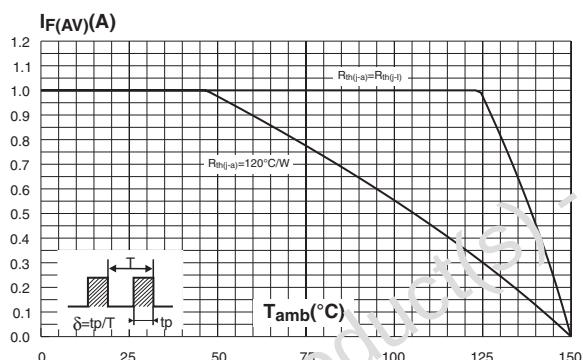


Figure 4: Non repetitive surge peak forward current versus overload duration

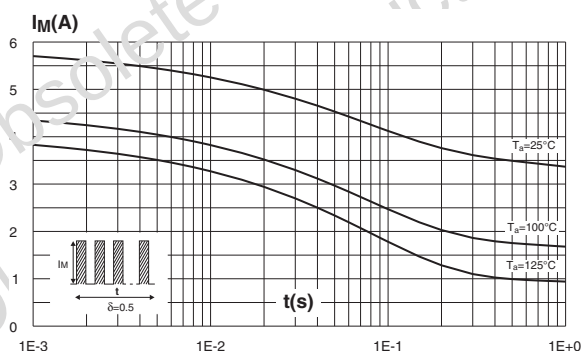


Figure 5: Variation of thermal impedance junction to ambient versus pulse duration (epoxy printed circuit board, e(Cu)=35μm, recommended pad layout)


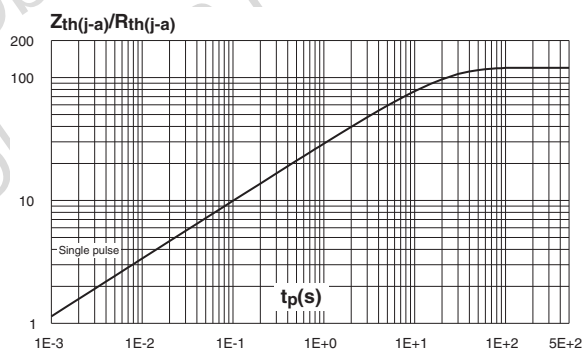


Figure 6: Forward voltage drop versus forward current (maximum values)

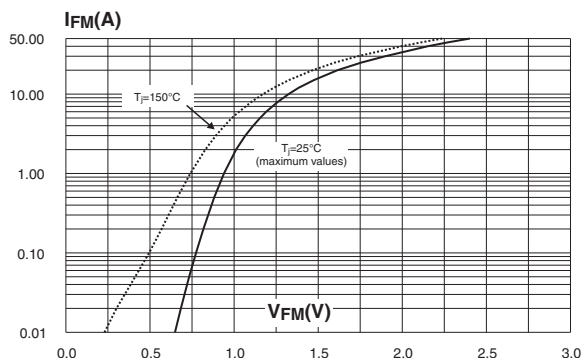

STPR120A

Figure 7: Junction capacitance versus reverse voltage applied (typical values)

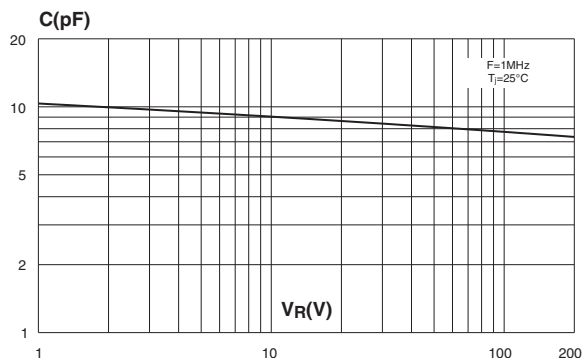


Figure 8: Recovery charges versus dl_F/dt

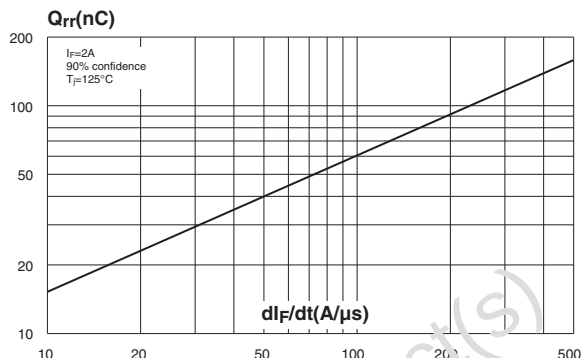


Figure 9: Peak recovery current versus dl_F/dt


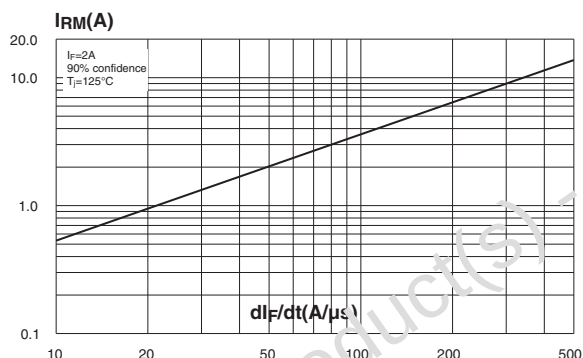


Figure 10: Dynamic parameters versus junction temperature

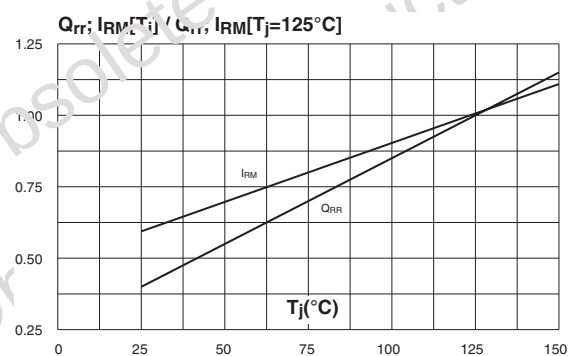

STPR120A

Figure 11: SMA Package Mechanical Data


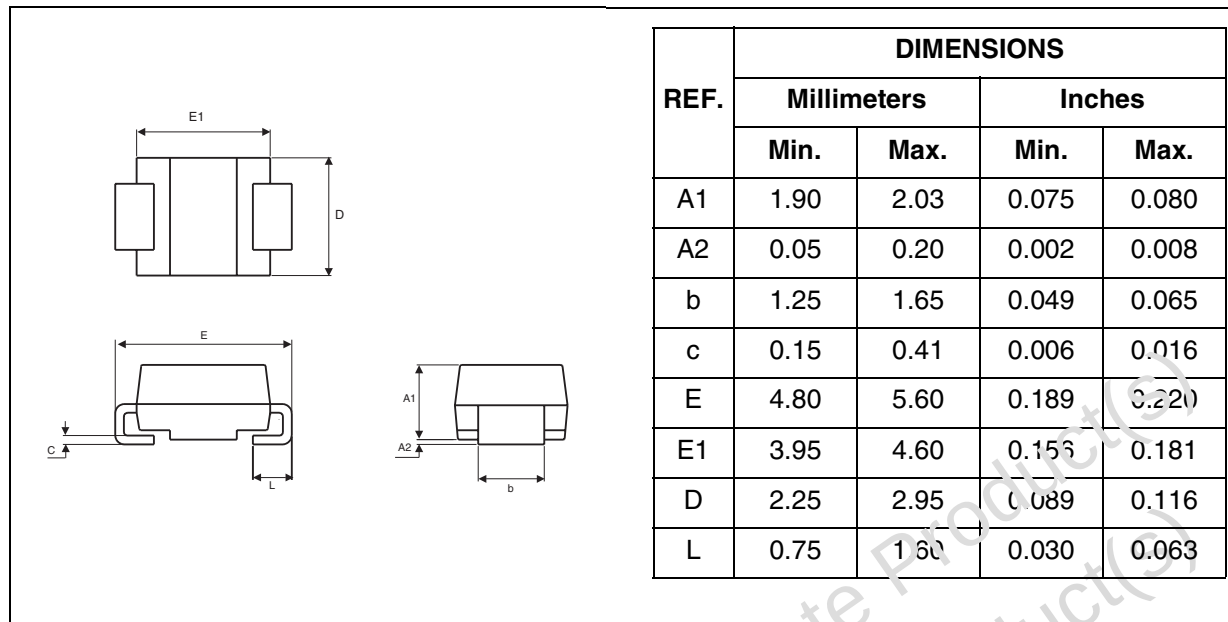


Figure 12: SMA Foot Print Dimensions
(in millimeters)

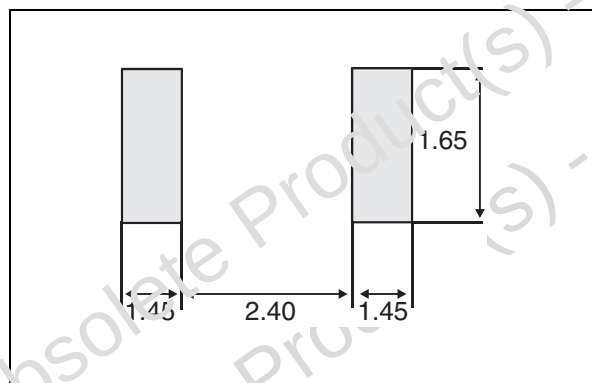

STPR120A

Table 7: Ordering Information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPR120A	R12	SMA	0.068 g	5000	Tape & reel

- Band indicates cathode
- Epoxy meets UL94, V0

Table 8: Revision History

Date	Revision	Description of Changes
Jul-2003	3	Last update.
Aug-2004	4	SMA package dimensions update. Reference A1 max. changed from 2.70mm (0.106inc.) to 2.03mm (0.080).

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2004 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com