

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)
[68021WA4PL201](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: **POWER / SIGNAL - SOLDER CUP - MALE**

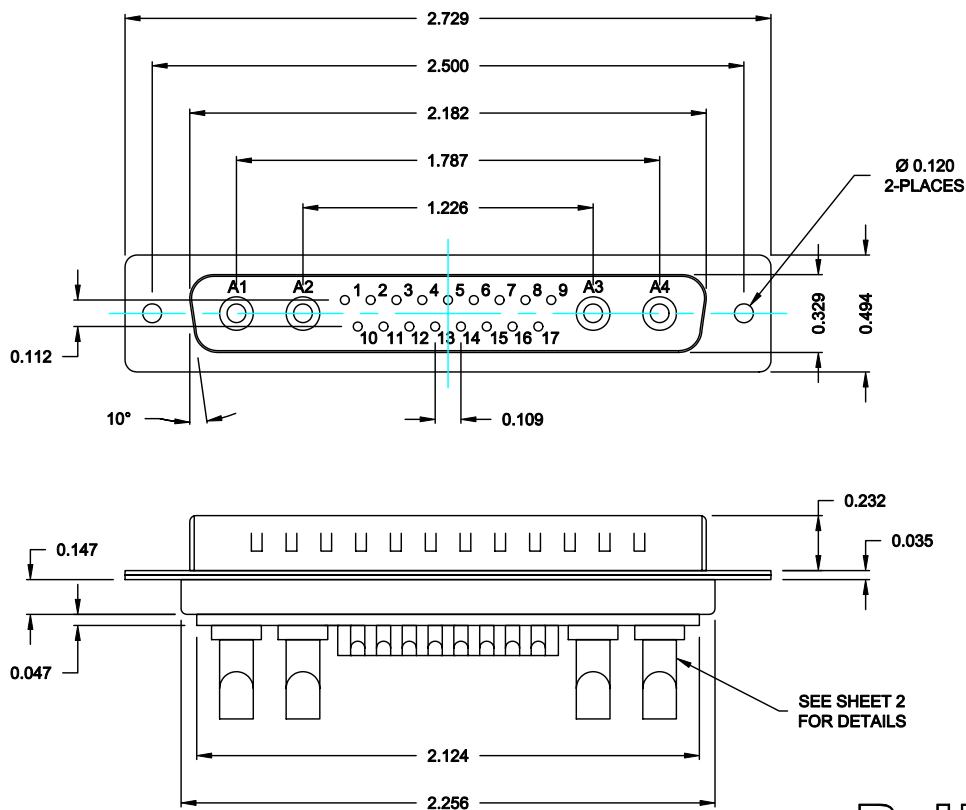

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 Milliohms Max.
POWER PINS: SEE PART No. BELOW
SIGNAL PINS: 3 AMPS

MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.


MATERIALS:

CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL
FINISH: NICKEL
SHELL: NICKEL

68021WA4PLYY1

20 = 20 AMPS
40 = 40 AMPS


RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 09-13-06	
		CHECKED: X		DATE: X	
		SCALE: N.T.S.	SHEET 1 OF 2		REV 0
		DWG NO. 68021WA4PLYY1			


NorComp

DESCRIPTION: **680 SERIES CONTACTS**


NOTE:
SIGNAL AND POWER CONTACTS
COME PRE-LOADED INTO INSULATORS



SIGNAL CONTACTS
ACCEPTS UP TO 20 AWG WIRE

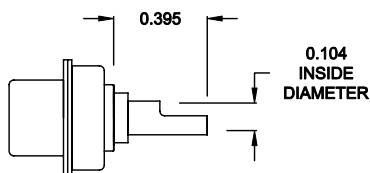

20 AMP POWER CONTACTS
ACCEPTS UP TO 12 AWG WIRE

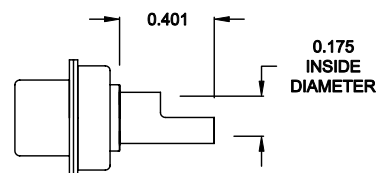

40 AMP POWER CONTACTS
ACCEPTS UP TO 8 AWG WIRE

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			DRAWN: C. SMITH		DATE: 09-13-06	
				CHECKED: X		DATE: X	
				SCALE: N.T.S.	SHEET 2	OF 2	REV 0
				DWG NO. 68021WA4PLYY1			

NorComp