

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)
[6805W5203L201](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: POWER - SOLDER CUP - FEMALE

SPECIFICATIONS:

ELECTRICAL:



INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 Milliohms Max.
POWER PINS: SEE PART No. BELOW

MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:

CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL
FINISH: NICKEL

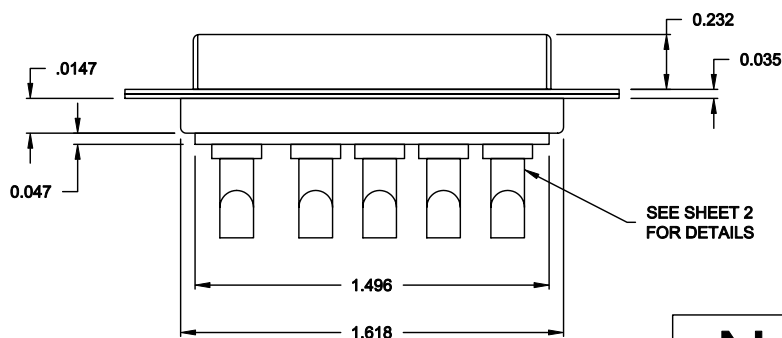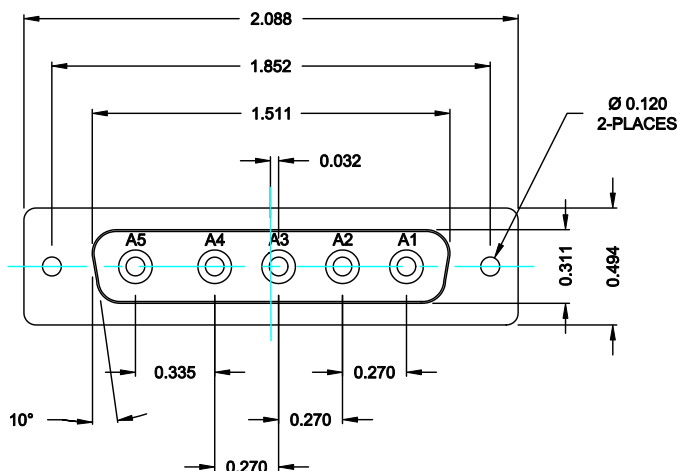

6805W5203LYY1

20 = 20 AMPS
40 = 40 AMPS

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH		DATE: 09-11-06	
			CHECKED: X		DATE: X	
			SCALE: N.T.S.	SHEET 1	OF 2	REV 0
			DWG NO. 6805W5203LYY1			

NorComp

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN:		DATE:	
		C. SMITH		09-11-06	
NorComp		CHECKED:		DATE:	
		X		X	
		SCALE:	SHEET OF		REV
		N.T.S.	2	2	0
		DWG NO. 6805W5203LYY1			