

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[NorComp](#)
[6843W3103L461](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: POWER - RIGHT ANGLE - MALE

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

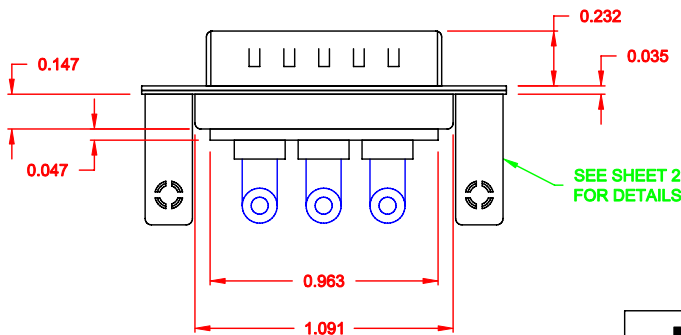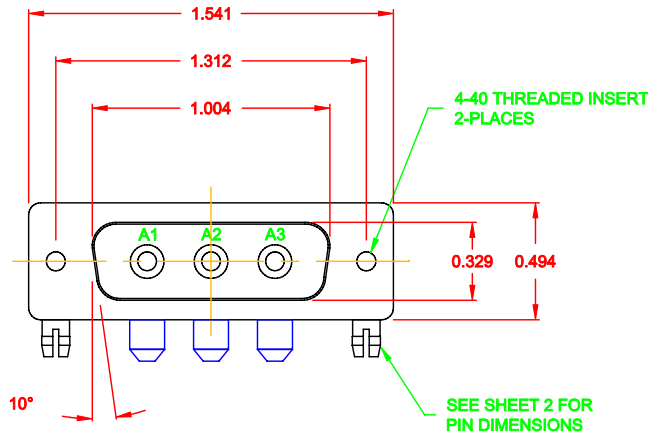

SPECIFICATIONS:

ELECTRICAL

INSULATOR RESISTANCE:	5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING:	1,000VAC r.m.s.
OPERATING TEMPERATURE:	-55° C ~ +125° C
CONTACT RESISTANCE:	30 Milliohms Max.
POWER PINS:	40 AMPS

MECHANICAL:

CONTACT INSERTION FORCE:	4.5 Kg Max.
CONTACT SEPARATOR FORCE:	0.3Kg Min.

MATERIALS:

CONTACTS:	BRASS
INSULATOR:	PBT UL94V-0 RATED, 230°C PROCESS TEMP.
SHELL:	STEEL
BOARD LOCK:	BRASS, NICKEL PLATED
CINCHNUT:	BRASS, NICKEL PLATED
BRACKET:	STEEL, NICKEL PLATED

FINISH:

SHELL:	NICKEL
--------	--------



6843W3103L461

46 = 4-40 INSERTS /
BOARD LOCKS


RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN:	C. SMITH	DATE:	10-05-06
			CHECKED:		DATE:	
			SCALE:	1.5 = 1	SHEET	1 OF 2
NorComp		DWG NO.		6843W3103L461		
				REV 2		

NOTE:
POWER CONTACTS COME
PRE-LOADED INTO INSULATORS

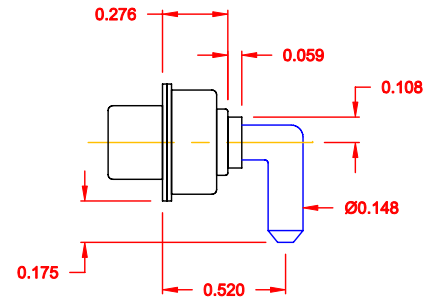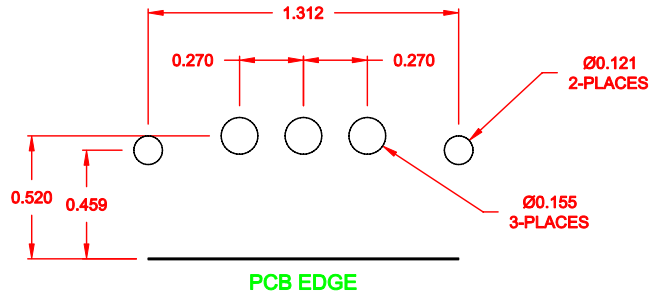

40 AMP POWER CONTACT

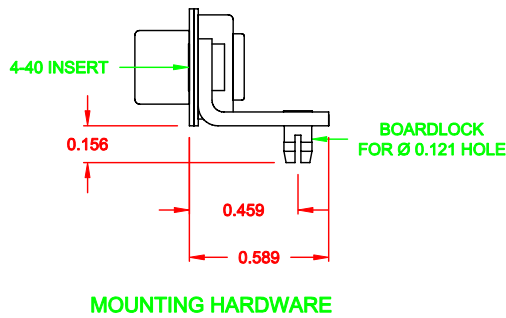

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 10-05-06
			CHECKED:	DATE:
NorComp		SCALE: 1.5 = 1	SHEET 2 OF 2	REV 2
		DWG NO. 6843W3103L461		