

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)
[6843W3K203L461](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: POWER - RIGHT ANGLE - FEMALE

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 Milliohms Max.
POWER PINS: 40 AMPS

MECHANICAL:



CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:

CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL
BOARD LOCK: BRASS, NICKEL PLATED
CINCHNUT: BRASS, NICKEL PLATED
BRACKET: STEEL, NICKEL PLATED

FINISH:

SHELL: NICKEL

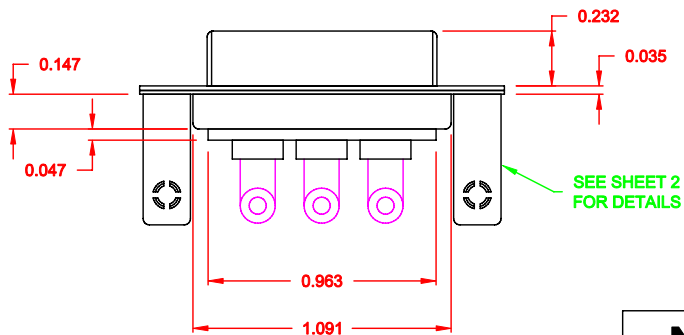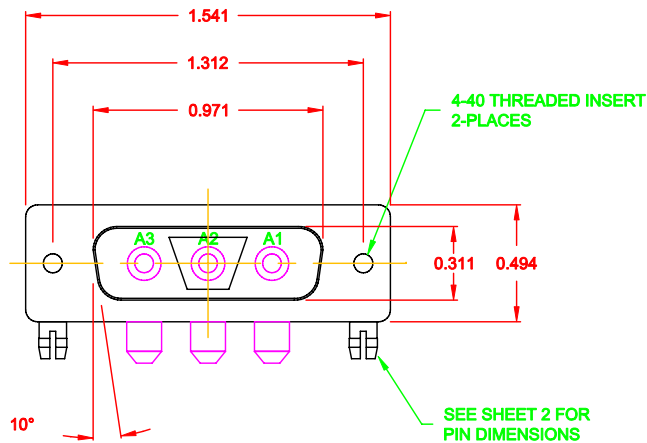

6843W3K203L461

46 = 4-40 INSERTS /
BOARD LOCKS



RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 10-06-06
			CHECKED:	DATE:
NorComp		SCALE: 1.5 = 1	SHEET 1 OF 2	REV 2
		DWG NO. 6843W3K203L461		


DESCRIPTION: 684 SERIES CONTACTS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NOTE:
POWER CONTACTS COME
PRE-LOADED INTO INSULATORS

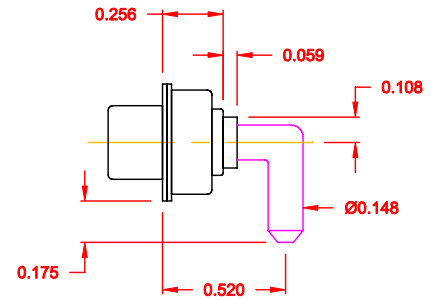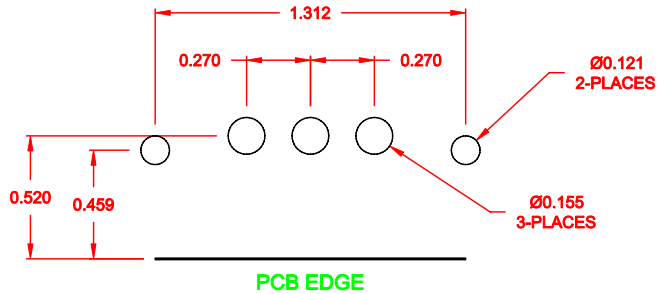

40 AMP POWER CONTACT

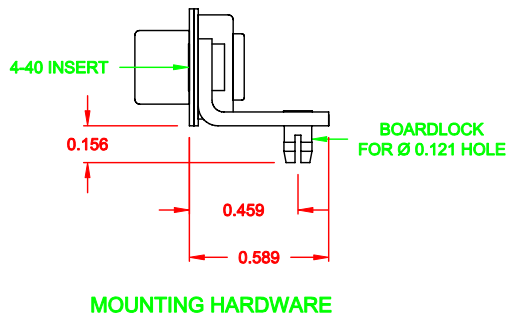

MOUNTING HARDWARE

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN:		DATE:					
		C. SMITH		10-06-06					
NorComp		CHECKED:		DATE:					
		SCALE:		SHEET		OF		REV	
		1.5 = 1		2		2		2	
		DWG NO.		6843W3K203L461					