

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)
[A-DS-25-LL-WP](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

A

Panel Thickness

B

Screw L=5,0 For Panel Thickness
Under 1.2mm
Screw L=6,0 For Panel Thickness
Between 1.2-2.0mm

C

D

E

Recommended Panel Cut-Out

F

G

RoHS compliant



H

Scale	1:1					Date	Name	Customer-No.
TOLERANCE						Drawn	24.12.2008	JACK
X.X	±0.25					Approved	24.12.2008	Hellwig
X.XX	±0.10							
X.XXX	±0.05							
DIM	TOL							
ANGLE	±1°							
X.X°	±X°	①	Drawn	24.12.2008	JACK			
Angle	TOL	Id.	Modification	Date	Name			

NOTES:

MATERIAL

1. Waterproof Rate: IP68
2. Connector: D-SUB 25PIN Male
3. Core Color: Black
4. Do Mating Test After Glued

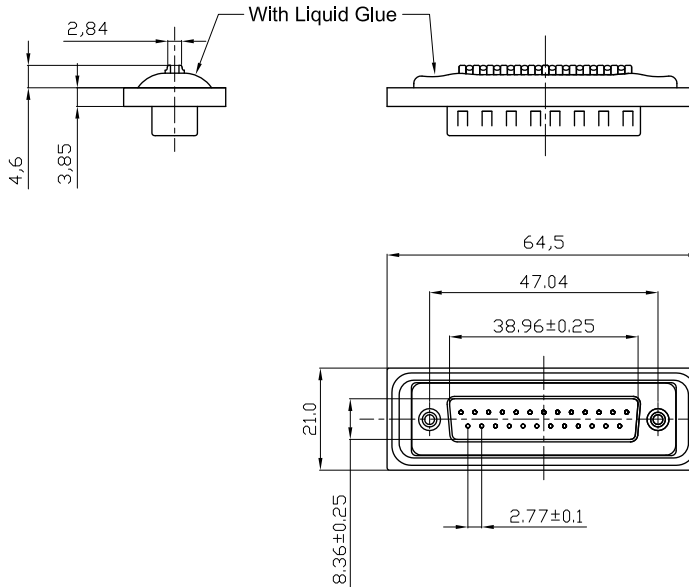

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7