

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[98423-G61-03LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER

98423-X61-XXXXF

PLATING

S = 0.38μm GOLD/GXT
ON CONTACT AREA
2μm MIN MATTE
TIN ON TAIL

G = 0.76 μ m GOLD/GXT
ON CONTACT AREA
2 μ m MIN MATTE
TIN ON TAIL

F = GOLD FASH
ON CONTACT AREA
2µm MIN MATTE

- RoHS COMPATIBLE, SEE NOTE 6
- PACKAGING OPTIONAL LETTER (SEE NOTE 5)
- NB OF POSITIONS PER ROW
- 02 TO 25 POS

NOTES:

1. MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC UL 94V-0, COLOR BLACK
2. MATERIAL TERMINAL: COPPER ALLOY
3. TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW
4. 7N MIN. PIN RETENTION IN EITHER DIRECTION.

5. PACKAGING:

= PLASTIC BOX

U = TUBE AVAILABLE FROM 06 TO 50 POS

6. ROHS COMPATIBLE PRODUCT SPECIFICATIONS

Q - PLATING:




- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.

b – MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.

C – LABELLING:

- MEETS PACKAGING SPECS AS PER GS-14-920
d - THIS PRODUCT MEETS EUROPEAN DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DISCRIBED
IN GS-47-0004

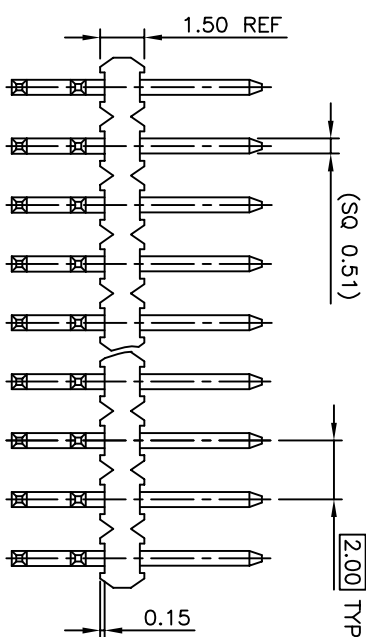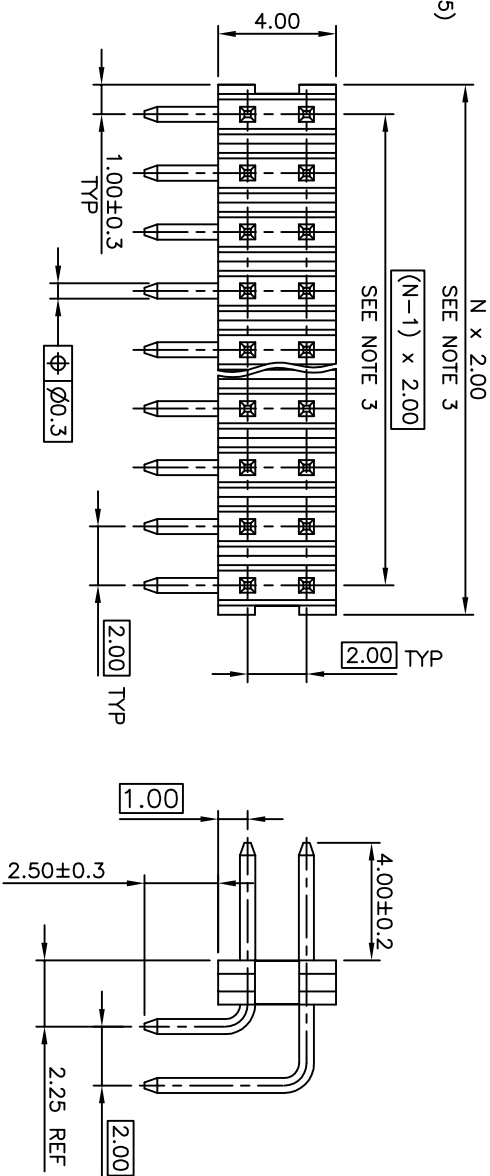

RECOMMENDED HOLE PATTERN

mat'l. code		surface		tolerance		projection		product family	
		150 1302	✓	150 4.06	150 10			MINITEK	
tolerance unless otherwise specified								title	
A F10338 LWM 03.10.01		angle		x ±0.3		mm		UNSHR HEADER	
B F04-035 J00 05.01.13		linear		X.X ±0.13				RIGHT ANGLE TMT	
C F06-0210 LWM 06.07.05				X.XX ±0.05		scale 1:1		dwg no	
D F08-0145 ELA 17.04.08		dr		L MULIN				sheet 1 of 1	
E B-19190 LWM 14.10.24		enfr		COMPAGNON				98423	
		chr						A	
		apdd		JM.C				CUSTOMER Drawing	
sheet revision								type	
index sheet									