

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1885280000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

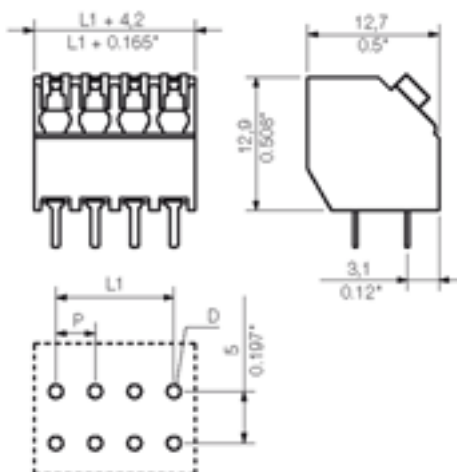

#### General ordering data

Order No.	1885280000
Part designation	LSF-SMT3.50/12/135 1.5
Version	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 12, 135°, Tube
EAN	4032248490165
Qty.	12 pc(s).

#### System parameters

Product family	System LS
Conductor connection system	Push In
Fitted to PCB	Reflow solder connection
Outgoing direction of conductor	135°
Pitch	3.5 mm
Pitch in inch	0.138 inch
No. of poles	12
Fitted by customer	no
No. of rows	1
Solder pin length	1.5 mm
Dia. of fitting hole	1.1 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	2
Stripping length	8 mm

**System parameters**

L1 in mm	38.5 mm
L1 in inch	1.516 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

**Material data**

Insulating material	LCP GF
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 175
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C

**Connectable conductors**

Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	1.5 mm <sup>2</sup>
AWG, min.	24
AWG, max.	16
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	0.25 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.25 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	0.75 mm <sup>2</sup>

**DIN IEC rating data**

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	16 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	14 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 80 A

#### CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	24
AWG conductor (field wiring), max.	16

#### UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	24
AWG conductor, max.	16

#### Approvals

Approvals institutes



#### Classifications

eClass 5.1	27-26-11-01
------------	-------------

#### Similar products

Order No.	Part designation	Version
1885650000	LSF-SMT3.50/2/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 2, 135°, Tube
1887340000	LSF-SMT3.5/2/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 2, 135°, Tape
1885180000	LSF-SMT3.50/2/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 2, 135°, Tube
1887550000	LSF-SMT3.5/2/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 2, 135°, Tape
1885660000	LSF-SMT3.50/3/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 3, 135°, Tube
1887350000	LSF-SMT3.5/3/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 3, 135°, Tape
1885190000	LSF-SMT3.50/3/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 3, 135°, Tube
1887560000	LSF-SMT3.5/3/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 3, 135°, Tape
1885670000	LSF-SMT3.50/4/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 4, 135°, Tube
1887360000	LSF-SMT3.5/4/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 4, 135°, Tape
1885200000	LSF-SMT3.50/4/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 4, 135°, Tube
1887580000	LSF-SMT3.5/4/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 4, 135°, Tape

1885680000	LSF-SMT3.50/5/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 5, 135°, Tube
1887460000	LSF-SMT3.5/5/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 5, 135°, Tape
1885210000	LSF-SMT3.50/5/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 5, 135°, Tube
1887630000	LSF-SMT3.5/5/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 5, 135°, Tape
1885690000	LSF-SMT3.50/6/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 6, 135°, Tube
1887470000	LSF-SMT3.5/6/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 6, 135°, Tape
1885220000	LSF-SMT3.50/6/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 6, 135°, Tube
1887640000	LSF-SMT3.5/6/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 6, 135°, Tape
1885700000	LSF-SMT3.50/7/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 7, 135°, Tube
1887480000	LSF-SMT3.5/7/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 7, 135°, Tape
1885230000	LSF-SMT3.50/7/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 7, 135°, Tube
1887650000	LSF-SMT3.5/7/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 7, 135°, Tape
1885710000	LSF-SMT3.50/8/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 8, 135°, Tube
1887490000	LSF-SMT3.5/8/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 8, 135°, Tape
1885240000	LSF-SMT3.50/8/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 8, 135°, Tube
1887660000	LSF-SMT3.5/8/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 8, 135°, Tape
1885720000	LSF-SMT3.50/9/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 9, 135°, Tube
1887500000	LSF-SMT3.5/9/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 9, 135°, Tape
1885250000	LSF-SMT3.50/9/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 9, 135°, Tube
1887670000	LSF-SMT3.5/9/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 9, 135°, Tape
1885730000	LSF-SMT3.50/10/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 10, 135°, Tube
1887510000	LSF-SMT3.5/10/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 10, 135°, Tape
1885260000	LSF-SMT3.50/10/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 10, 135°, Tube
1887680000	LSF-SMT3.5/10/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 10, 135°, Tape
1885740000	LSF-SMT3.50/11/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 11, 135°, Tube
1887520000	LSF-SMT3.5/11/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 11, 135°, Tape

1885270000	LSF-SMT3.5/11/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 11, 135°, Tube
1887690000	LSF-SMT3.5/11/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 11, 135°, Tape
1885750000	LSF-SMT3.5/12/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 12, 135°, Tube
1887530000	LSF-SMT3.5/12/135 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 12, 135°, Tape
1887700000	LSF-SMT3.5/12/135 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 12, 135°, Tape
1885760000	LSF-SMT3.5/13/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 13, 135°, Tube
1885290000	LSF-SMT3.5/13/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 13, 135°, Tube
1885770000	LSF-SMT3.5/14/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 14, 135°, Tube
1885300000	LSF-SMT3.5/14/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 14, 135°, Tube
1885780000	LSF-SMT3.5/15/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 15, 135°, Tube
1885310000	LSF-SMT3.5/15/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 15, 135°, Tube
1885790000	LSF-SMT3.5/16/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 16, 135°, Tube
1885320000	LSF-SMT3.5/16/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 16, 135°, Tube
1885800000	LSF-SMT3.5/17/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 17, 135°, Tube
1885330000	LSF-SMT3.5/17/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 17, 135°, Tube
1885810000	LSF-SMT3.5/18/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 18, 135°, Tube
1885340000	LSF-SMT3.5/18/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 18, 135°, Tube
1885820000	LSF-SMT3.5/19/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 19, 135°, Tube
1885350000	LSF-SMT3.5/19/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 19, 135°, Tube
1885830000	LSF-SMT3.5/20/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 20, 135°, Tube
1885360000	LSF-SMT3.5/20/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 20, 135°, Tube
1885840000	LSF-SMT3.5/21/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 21, 135°, Tube
1885370000	LSF-SMT3.5/21/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 21, 135°, Tube
1885850000	LSF-SMT3.5/22/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 22, 135°, Tube
1885380000	LSF-SMT3.5/22/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 22, 135°, Tube
1885860000	LSF-SMT3.5/23/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 23, 135°, Tube



1885390000	LSF-SMT3.50/23/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 23, 135°, Tube
1885870000	LSF-SMT3.50/24/135 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 24, 135°, Tube
1885400000	LSF-SMT3.50/24/135 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 24, 135°, Tube