

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Samtec, Inc.](#)  
[SSA-132-S-G](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

REV. J

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED		TOLERANCES ARE:		TITLE:	DWG NO:
ONE PLACE DECIMALS: ± .1 [2.5]	THREE PLACE DECIMALS: ± .005 [.127]	ANGLES	± 2°	SSA-SOLDER TAIL ASSEMBLY	SSA-1XX-S-X
TWO PLACE DECIMALS: ± .01 [.25]	FOUR PLACE DECIMALS: ± .0020 [.0508]			SHEET 1 OF 1	


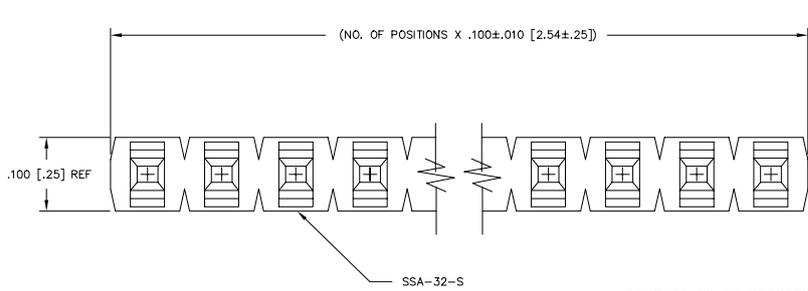


SSA-1XX-S-X

No. OF POSITIONS \_\_\_\_\_  
01 THRU 32 AVAILABLE

LEAD STYLE \_\_\_\_\_  
SOLDER TAIL CONTACT  
C-6-S-X

CONTACT PLATING \_\_\_\_\_  
-G: GOLD-SPECIFY -G IN CONTACT SUFFIX -X  
-T: TIN-SPECIFY -T IN CONTACT SUFFIX -X

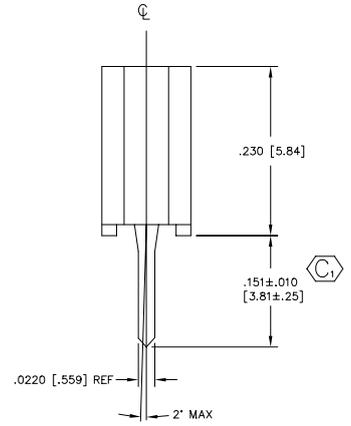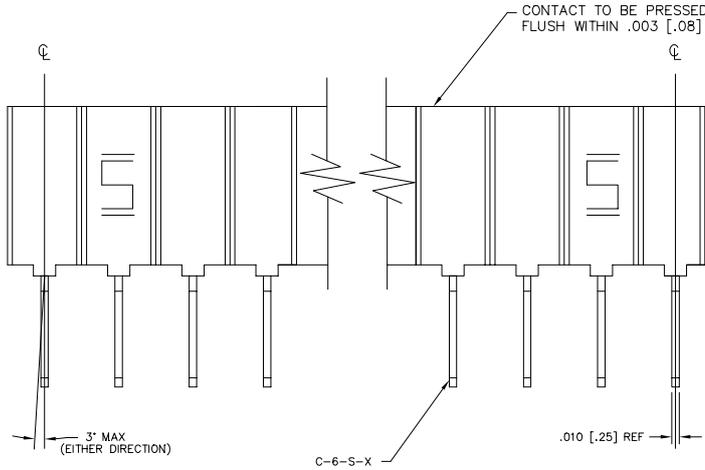

Do not scale from this print

- NOTES:
1. MINIMUM CONTACT PUSH-OUT FORCE: 16 oz.
  2. INSERTION FORCE: 3.0 oz. AVG. PER CONTACT USING .018 [.46] DIA PIN.
  3. WITHDRAWAL FORCE: 1.5 oz. AVG. PER CONTACT USING .018 [.46] DIA PIN.
  4. (C) REPRESENTS A CRITICAL DIMENSION.

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:  
INSULATOR:  
DUPONT FR-530 RYNITE  
CONTACT:  
PHOSPHOR BRONZE

**samtec**

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

MISC/MKTG  
SSAS-ASM

MADE BY:  
MARK CHILTON 11-21-88

SSA-1XX-S-X  
SHEET 1 OF 1