

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Samtec, Inc.](#)  
[CLP-150-02-F-D](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

REVISION BR

DO NOT SCALE FROM THIS PRINT

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES [MILLIMETERS ARE IN BRACKETS]		TOLERANCES ARE:	TITLE: LOW PROFILE .050 x .050 DOUBLE ROW ASM	DWG NO: CLP-1XX-XX-XXX-D-XX SHEET 1 OF 2
ONE PLACE DECIMALS ± .1[2.54]	TWO PLACE DECIMALS ± .01[.25]	THREE PLACE DECIMALS ± .005[.127]	FOUR PLACE DECIMALS ± .0020[.051]	ANGLES ± 2°

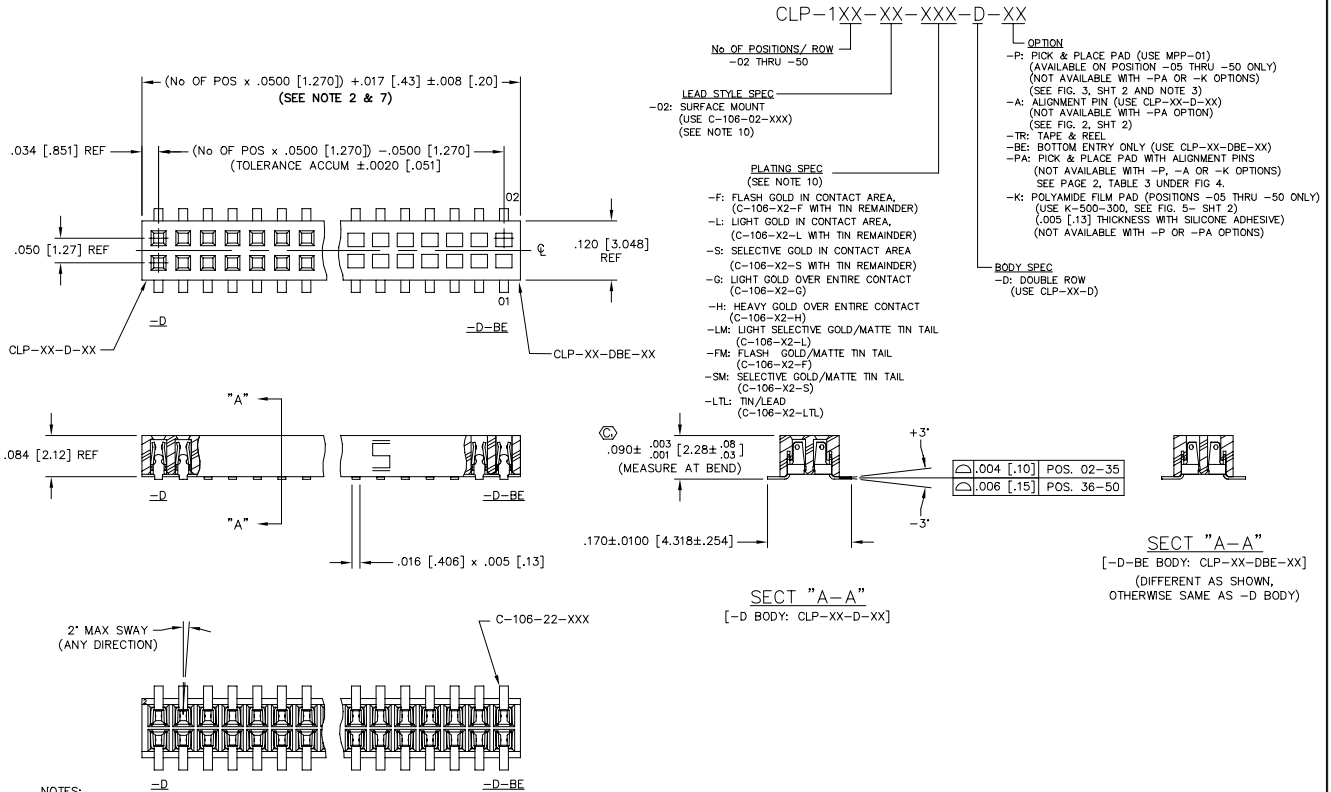

- NOTES:
1. MINIMUM PUSHOUT FORCE: .5 lb (8 OZ).
  2. ONE POSITION WILL BE LOST FOR EVERY CUT MADE ON A SOCKET STRIP; CUT FLASH TO BE .010 [.25] MAX WITH NO FLASH ALLOWED IN HOLES OR EXTENDING BELOW LEADS.
  3. TUBE PACKAGE POSITIONS 5 - 50 ONLY. POSITIONS 2-4 ARE TO BE LAYER PACKAGED.
  4. SHEAR TAILS TO DIMENSIONS SHOWN: .003 [.08] MAX BURR.
  5. PARTS TO BE SYMMETRICAL ABOUT CL WITHIN ±.0015.
  6. Ⓢ REPRESENTS A CRITICAL DIMENSION.
  7. ENDWALL AFTER CUTTING: .0185±.0025 [.470±.064]
  8. VOID CORES MAY NOT BE PRESENT.
  9. NOTE DELETED.
  10. HAND FILL USE C-106-01-XX.  
AUTOMATION USE C-106-22-XX FOR -BE AND MOLDED -A.

**PROPRIETARY NOTE**  
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR COPIED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

MATERIAL: BODY: LCP COLOR: BLACK CONTACT: PHOSPHOR BRONZE	EXISPROD/ASSEMBLY050 CLP-DASM
PLOT SCALE: .150/ DIMSCALE: .125	520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150 PHONE (812) 944-6733 P.O. BOX 1147 CODE 55322
	MADE BY: PURVIS 1-31-94 SHEET 1 OF 2 CLP-1XX-XX-XXX-D-XX